


SUBSTITUTE FORM PTO-1390 TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE ATTORNEY'S DOCKET NUMBER 12304-002001 U.S. APPLICATION NO. (IF KNOWN) <div style="font-size: 1.5em; font-weight: bold;">09/623281</div>
INTERNATIONAL APPLICATION NO. PCT/CB99/00550	INTERNATIONAL FILING DATE 02 March 1999	PRIORITY DATE CLAIMED 03 March 1998
TITLE OF INVENTION NONLINEAR SYSTEMS, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT		
APPLICANT(S) FOR DO/EO/US STEPHEN ALEC BILLINGS, ZI QIANG LANG		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11. to 16. below concern other documents or information included: 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: <input checked="" type="checkbox"/> Copy of International Preliminary Examination Report with amended sheets <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		

"Express Mail" mailing label number
Date of Deposit

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Patent Service" under 37 CFR 1.10 on the date indicated above.
to the Commissioner of Patents and Trademarks,
P.O. Box 20231

Samantha Bell
Samantha Bell

U.S. APPLICATION NO. (IF KNOWN)		INTERNATIONAL APPLICATION NO. PCT/EP99/00550		ATTORNEY'S DOCKET NUMBER BOSUNIVELP0830VBB-2	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS	PTO USE ONLY
Basic National Fee (37 CFR 1.492(a)(1)-(5)):					
Search report has been prepared by the EPO or JPO..... \$840				\$840.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482)... \$670				\$0.00	
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).... \$690				\$0.00	
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$970				\$0.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2) to (4) \$96				\$0.00	
ENTER APPROPRIATE BASIC FEE AMOUNT				\$840.00	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 mos. from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	40 - 20	20	x \$18	\$360.00	
Independent Claims	10 - 3	7	x \$78	\$546.00	
Multiple Dependent Claims(s) (if applicable)			+ \$260	\$260.00	
TOTAL OF ABOVE CALCULATIONS				\$2,006.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28.)				\$1,003.00	
SUBTOTAL				\$1,003.00	
Processing fee of \$130 for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 mos. from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
TOTAL NATIONAL FEE				\$1,003.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31).				\$0.00	
TOTAL FEES ENCLOSED				\$1,003.00	
				Amount to be refunded	
				Charged	
a. <input checked="" type="checkbox"/> A check in the amount of \$1,003.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Eric L. Prah					
FISH & RICHARDSON P.C.			SIGNATURE		
225 Franklin Street			Eric L. Prah		
Boston, MA 02110-2804			NAME		
(617) 542-5070 phone			32,590		
(617) 542-8906 facsimile			REGISTRATION NUMBER		

ATTORNEY DOCKET NO. 12304-002001

Applicant or Patentee: Stephen Alec Billings et al.
Serial or Patent No.: 09/623,281
Filed or Issued: September 1, 2000
For: NONLINEAR SYSTEMS, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(d)) — NONPROFIT ORGANIZATION

I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below:

Name of Organization: UNIVERSITY OF SHEFFIELD
Address of Organization: Mappin Street WESTERN BANK
Sheffield S1 3JD SHEFFIELD
England S10 2TN
ENGLAND

Type of Organization:
☒ University or Other Institution of Higher Education

I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code with regard to the invention entitled NONLINEAR SYSTEMS, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT by inventor(s) STEPHEN ALEC BILLINGS and ZI QIANG LANG described in:

- ☐ the specification filed herewith.
- ☒ application serial no. 09/623,281, filed September 1, 2000.
- ☐ patent no. , issued .

I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).


*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention inverting to their status as small entities. (37 CFR 1.27)

Full Name:
Address:
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status when any new rule 53 application is filed or prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name:	<u>Dr R A Eyles</u>
Title:	<u>Head of I.P.</u>
Address:	<u>Mappin Street</u> <u>WESTERN BANK</u> <u>Sheffield S1 3JD</u> <u>SHEFFIELD</u> <u>S10 2TN</u> <u>ENGLAND</u> <u>England</u>

Signature:  Date: October 19th 2000

38/PRTS

09/623281

534 Rec'd PCT/PTO 01 SEP 2000

WO 99/45644

PCT/GB99/00550

Nonlinear System, Method of Design thereof and
Computer Program Product

The present invention relates to non-linear systems,
5 methods of design thereof in the frequency domain and
computer program products. More particularly, the present
invention relates to a non-linear system having pre-
determinable frequency response characteristics. The
invention can be utilised to design and realise, for
10 example, nonlinear filters having a required frequency
response or transfer functions having specified transfer
characteristics or within a control system context.

The possible frequency components in an output signal
15 of a linear system are exactly the same as the frequency
components of a corresponding input signal. Conventional
linear filter design is based on the principle that energy
in unwanted frequency bands is attenuated.

20 The Dolby filter, which varies the amplitude of the
output signal as a function of the level and frequency of
the input, is an example of a nonlinear filter system.
However, when compared with the input, the output does not
contain any additional frequency components. Modulation is
25 another concept related to nonlinear filtering, which is
associated with signal transmission where the signal to be
transmitted is modulated by a carrier signal and then
transmitted through a medium. Although a modulation device
allows energy to be moved from one frequency band to
30 another, the output frequency components of such a device
depend not only on the input components but mainly on the
carrier signal. Therefore, the energy transfer implemented
by modulation is realised by a two input and one output

WO 99/45644

PCT/GB99/00550

system where one input is the carrier signal and the other input is the signal to be processed.

The prior art lacks a non-linear system and method
5 of/apparatus for the design of such a non-linear system for
predictably transferring energy from one frequency or band
of frequencies of an input signal to another frequency or
band of frequencies independently of any other input signal.
Further, the prior art lacks a non-linear control system
10 which can predictably transfer energy from one frequency
band to another frequency band.

It is an object of the present invention to at least
mitigate some of the problems of the prior art.

15

Accordingly, a first aspect of the present invention
provides a method for designing a non-linear system for
transferring energy from a time or spatial domain input
signal having a first spectrum at a first pre-determinable
20 frequency or range of frequencies to a time or spatial
domain output signal having a second spectrum at a second
pre-determinable frequency or range of frequencies.

Preferably, the method comprises the steps of
identifying the first spectrum of the time or spatial domain
25 input signal from which energy is to be transferred,
specifying the second spectrum of the time or spatial domain
output signal to which said energy is to be transferred, and
calculating, using a frequency domain description of said
output signal, for example, the output spectrum, expressed
30 in terms of a frequency domain description of said input
signal and coefficients of a time or spatial domain
description of a generalised non-linear system, the

WO 99/45644

PCT/GB99/00550

coefficients of a said time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

5 Advantageously, the present invention allows energy at a particular frequency within a given system to be transferred to another frequency or band of frequencies at which the response of the system is greatly reduced or negligible, or

10 allows energy of a signal which is transmitted at a particular frequency or band of frequencies to be transferred, without using an additional modulating signal, to another frequency or band of frequencies at which the associated transmission media allows signals to pass, or

15 allows energy at a particular band of frequencies to be transferred and spread over a new wider range of frequencies so as to attenuate the energy by employing the desired interkernel and intrakernel effects of nonlinear systems.

20 The present invention is based upon the relationship between the input and output spectra or frequency components of nonlinear systems, and the relationship between the input and output frequencies and/or frequency ranges in the nonlinear case. In addition, the invention utilises a
25 mapping between the time or spatial domains and frequency domain which allows the output spectra or frequency content of nonlinear systems to be described completely by the coefficients of time or spatial domain models which represent the filter or non-linear system to be constructed.

30 A second aspect of the present invention provides a method for manufacturing a non-linear system for transferring energy from a time or spatial domain input

WO 99/45644

PCT/GB99/00550

signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method of manufacture comprising the steps of

(a) designing said non-linear system comprising the steps of identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer, and

(b) materially producing the non-linear system so designed.

A third aspect of the present invention provides a data processing system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

WO 99/45644

PCT/GB99/00550

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

5 means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said
10 generalised non-linear system in order to give effect to the energy transfer.

A fourth aspect of the present invention provides a computer program product for designing a non-linear system
15 for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said
20 computer program product comprising
computer program code means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
computer program code means for specifying the second
25 spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
computer program code means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a
30 frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or

WO 99/45644

PCT/GB99/00550

spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

A fifth aspect of the present invention provides a non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,

means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.

Advantageously, the fifth embodiment allows processing for the determination of the coefficients to be performed off-line and merely incorporated into a non-linear system which uses the coefficients.

WO 99/45644

PCT/GB99/00550

Embodiments of the present invention will be described by way of examples only, with reference to the accompanying in which:

figure 1 shows the effect of traditional signal processing by, for example, a linear filter;

figure 2 illustrates signal processing according to one aspect of the present invention;

figure 3 depicts a further example of the signal processing according to the present invention;

figure 4 shows a non-linear system arranged to give effect to the energy transformation shown in figure 3;

figure 5 illustrates a further energy transformation in which energy is distributed over a wider frequency band;

figure 6 illustrates the power spectral densities for the input and output signals of a designed nonlinear system;

figure 7 illustrates the power spectral densities for the input and output signals of another designed nonlinear system;

figure 8 depicts schematically a non-linear system;

figure 9 shows a digital implementation of the non-linear system shown in figure 8;

figure 10 illustrates the power spectral densities for the input and output signals of the nonlinear system which was obtained using a design which improves the filtering effect shown in figure 6;

figure 11 illustrates the power spectral densities for the input and output signals of the nonlinear system which was obtained using a design which improves the filtering effect shown in figure 7;

WO 99/45644

PCT/GB99/00550

figure 12 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 10;

figure 13 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 11;

figure 14 depicts the structure of a designed nonlinear system;

figure 15 illustrates the frequency spectrum of a signal to be processed using the present invention;

figure 16 illustrates the result of a Fast Fourier Transform of an input signal having the spectrum shown in figure 15;

figure 17 illustrates the results of the n-dimensional (n= 2 and 3) convolution integration for the spectrum shown in figure 16;

figure 18 illustrates the output magnitude frequency response of a designed nonlinear system to an input signal having the frequency spectrum shown in figure 15;

figure 19 shows the frequency spectrum of a further signal to be processed using the present invention;

figure 20 illustrates the output magnitude frequency response of the same nonlinear system as shown in figure 18 to the further signal to be processed having the frequency spectrum shown in figure 19;

figure 21 illustrates the frequency spectrum of a still further signal to be processed using the present invention;

figure 22 illustrates the output magnitude frequency response of the same nonlinear system as in figure 18 to the still further signal to be processed having the frequency spectrum shown in figure 21;

WO 99/45644

PCT/GB99/00550

figure 23 illustrates the structure of another designed nonlinear system;

figure 24 shows the continuous time realisation of the discrete time system in figure 23;

5 figure 25 shows a mechanical implementation of the continuous time system in figure 24;

figure 26 illustrates the result of a Fast Fourier Transform of the further signal shown in figure 19;

10 figure 27 illustrates the output magnitude frequency response of a further designed nonlinear system to the further signal shown in figure 19;

15 figure 28 illustrates the output magnitude frequency response of a still further designed nonlinear system to the signal shown in figure 15;

figure 29 illustrates the output magnitude frequency response of the nonlinear system shown in figure 28 to the further signal shown in figure 19;

20 figure 30 illustrates a flow chart for designing a nonlinear system according to an embodiment;

figure 31 illustrates a flow chart for designing a nonlinear system according to a further embodiment;

25 figure 32 shows the structure of a nonlinear filter designed based on specifications for both the magnitude and phase of output frequency responses;

30 figure 33 depicts the input and output magnitude frequency characteristics of a specific nonlinear filter designed based on specifications for both the magnitude and phase;

WO 99/45644

PCT/GB99/00550

figure 34 shows the phase angle of the spectrum $Y_1(j\omega)$ in figure 32 in the specific design case shown in figure 33 which reflects the phase response characteristic determined by the design;

5

figure 35 shows the phase characteristics of the linear phase FIR filter in the specific design case shown in figure 33;

10

figure 36 depicts the discrete time model of a nonlinear filter designed to focus energy from two different frequency bands into a single frequency band;

15

figure 37 shows the spectrum of an input signal of the nonlinear filter in figure 36;

20

figure 38 shows the frequency response of the nonlinear filter in figure 36 to the input in figure 37, which indicates an energy focus effect of the nonlinear filter;

25

figure 39 illustrates the block diagram of a spatial domain nonlinear filter;

figure 40 depicts the power spectral densities of an input and the corresponding output of the spatial domain nonlinear filter in figure 39;

30

figure 41 depicts an spatial domain input and corresponding output of the filter in figure 39;

35

figure 42 shows a one dimensional image to be processed by the spatial domain nonlinear filter in figure 39;

WO 99/45644

PCT/GB99/00550

figure 43 shows the one dimensional image obtained by processing the image in figure 42 using the spatial domain nonlinear filter in figure 39; and

5 figure 44 illustrates a data processing system upon which embodiments of the present invention can be implemented.

Referring to figure 1, there is shown the principle of, for example, traditional low pass, high pass, and band pass filtering. Figure 1 shows the power spectrum of a signal 100 both before and after processing. The energy of a signal 100 to be filtered comprises two parts, namely, a first part 102 for further processing or of interest and a second part 104 which is of no interest. Typically, the second part 104 of the signal is attenuated which results in a second signal 106. The second signal 106 comprises the original or a copy of the first part 102 and an attenuated portion or an attenuated version of the second part 108.

Figure 2 illustrates the principle of signal processing according to one aspect of the present invention. Figure 2 shows the power spectrum of a signal 200 both before and after processing. The signal comprises a first portion 202 and a second portion 204. The first portion 202 of the signal 200 is of interest for further processing or output. Accordingly, as a result of the signal processing using the present invention, the first portion 202 is retained and the energy in the second portion 204 is translated to another frequency band 206.

WO 99/45644

PCT/GB99/00550

I. DETAILED DESCRIPTION

The theory and method underlying the present invention will now be described in general terms in steps (i) to (vi).

5 (i) Determine the frequency spectrum of a signal to be processed, including the range of frequencies of the signal.

(ii) Specify the frequency spectrum of the output signal.

10 (iii) Determine the structure of a Nonlinear Auto-Regressive model with exogenous inputs (NARX model) to ensure that the energy transformation between different frequency bands and other design requirements, for example, specifications for magnitude and/or phase of the output spectrum over the
15 required output frequency band can be met or realised.

The general expression for a NARX model is given by

$$y(k) = \sum_{n=1}^N y_n(k) \quad (1)$$

where $y_n(k)$ is a 'NARX nth-order output' given by

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (2)$$

with

$$25 \quad p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, \dots, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

K_n is the maximum lag and $y(\cdot)$, $u(\cdot)$, and $c_{pq}(\cdot)$ are the output, input, and model coefficients respectively. A specific instance of the NARX model such as

$$30 \quad y(k) = 0.3u(k-1) + 0.7y(k-1) - 0.02u(k-1)u(k-1) - 0.04u(k-2)u(k-1) \\ - 0.06y(k-1)u(k-3) - 0.08y(k-2)y(k-3)$$

may be obtained from the general form (1) and (2) with

WO 99/45644

PCT/GB99/00550

$c_{01}(1)=0.3$, $c_{10}(1)=0.7$, $c_{02}(1,1)=-0.02$, $c_{02}(2,1)=-0.04$,
 $c_{11}(1,3)=-0.06$, $c_{20}(2,3)=-0.08$, else $c_{pq}(\cdot)=0$

5 Simplified designs will be considered below where the NARX model with only input nonlinearities is employed. However, it will be appreciated by one skilled in the art that the present invention is not limited to use in relation to only input nonlinearities. The present invention can
 10 equally well be used in circumstances of both non-linear outputs and non-linear inputs and outputs. Equally, the invention is not restricted to realisation as a NARX model. The invention may be realised using many alternative model forms either in discrete time or continuous time. Models
 15 such as the Hammerstein and Wiener model, or continuous time models, for example, a nonlinear differential equation model could be used or any other model, including discrete or continuous spatial models, that can be mapped into the frequency domain. However, for each of the models the main
 20 design principle is the same.

The NARX model with only input nonlinearities is given by equation (1) where

$$Y_n(k) = \begin{cases} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases} \quad (3)$$

25 The structure of the NARX model (1) and (3) is defined by the values of N , $K_n, n=1, \dots, N$, and, for each n (an integer between 1 and N inclusive), involves terms of the form

$$c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) \quad l_i = 1, \dots, K_n, \quad i=1, \dots, n,$$

WO 99/45644

PCT/GB99/00550

when $n \geq 2$ and

$$c_{i0}(l_i) y(k-l_i), \quad c_{0i}(l_i) u(k-l_i), \quad l_i = 1, \dots, K_i$$

5 when $n=1$ in the model.

The parameter N in the non-linear model (1) and (3) is associated with the realisability of the model required to give effect to the energy transformation. The ability to be
10 able to realise the energy transformation is determined from the relationship between the input and output frequencies or frequency ranges of non-linear systems.

The structure parameters K_n , $n=1, \dots, N$, are associated
15 with the extent to which specific design requirements such as the magnitude and/or phase of the output spectrum over the required output frequency band can be satisfied. These parameters are iteratively determined as part of the design. The model could initially be assumed to be of a simple form
20 in terms of these parameters. However, if the initial choice of parameters does not produce a satisfactory design the parameters are progressively or gradually revised according to the energy transfer effect of the resulting non-linear system.

25

For systems described by the NARX model (1) and (3), the relationship between the input and output frequencies or frequency ranges is given by

$$30 \quad f_y = f_{y_n} \cup f_{y_{n-1}} \quad (4)$$

where f_y denotes the range of frequencies of the output, and f_{y_n} and $f_{y_{n-1}}$ denote the ranges of frequencies produced by the N th-order and $(N-1)$ th-order nonlinearities, and

35

WO 99/45644

PCT/GB99/00550

$$f_y = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases}$$

$n = N \quad \text{and} \quad N-1$

where $[.]$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range defined by the interval $[a, b]$.

Given $[a, b]$ and the required output frequency range f_y , the smallest N for the NARX model (1) and (3) which can bring about the specified frequency domain energy transformation can be determined from equation 4.

(iv) Map the NARX model with the structure given in (iii) into the frequency domain to yield the frequency domain description. The frequency domain description is given in terms of the Generalised Frequency Response Functions (GFRFs), $H_n(jw_1, \dots, jw_n)$, $n = 1, \dots, N$, which, after this mapping, are specified in terms of time or spatial domain model parameters.

The mapping of the NARX model (1) and (3) between the time or spatial domain and the frequency domain is given by

$$H_n(jw_1, \dots, jw_n) = \frac{1}{\left\{ 1 - \sum_{l_1=0}^{K_1} c_{10}(l_1) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \right\}} \sum_{l_1, l_n=1}^{K_n} c_{nn}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)]$$

$n = 1, \dots, N \quad (5)$

WO 99/45644

PCT/GB99/00550

Therefore the frequency domain properties of the system can be completely defined in terms of the parameters $c_{pq}(\cdot)$ of the time or spatial domain description of the system.

- 5 (v) The output frequency response of the non-linear system (1) and (3) is given by

$$Y(jw) = \sum_{n=1}^N Y_n(jw) \quad (6)$$

10

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1+\dots+w_n=w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (7)$$

with

$$\int_{w_1+\dots+w_n=w} (\cdot) d\sigma_w$$

- 15 denoting an integration over the n th-dimensional hyper-plane $w_1+\dots+w_n=w$

Based on this relationship, the parameters in $H_n(jw_1, \dots, jw_n), n=1, \dots, N$, which, due to the mapping performed in (iv), are the same parameters as those in the time or spatial domain model are determined. This step enables the shape of the output frequency spectrum $Y(jw)$ to be defined which in turn ensures that the spectrum approaches the specified output frequency spectrum as closely as possible.

Different design specifications can lead to different implementations of corresponding designs.

- (v.1) Firstly, given knowledge of the input spectrum $U(jw)$ and the required output spectrum $Y^*(jw)$. Substituting (5) and (7) into (6) yields

WO 99/45644

PCT/GB99/00550

$$Y(jw) = \frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jwl_1)\right\}} \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1 + \dots + w_n = w} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(jw_i) d\sigma_w \quad (8)$$

Equation (8) enables the parameters associated with the time or spatial domain NARX model,

$$c_{0n}(l_1, \dots, l_n), \quad l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, \quad n=1, \dots, N,$$

and

$$c_{10}(l_1), \quad l_1=1, \dots, K_1,$$

to be determined as follows to implement the required design:

10

1) Based upon the equation

$$Y^*(jw) = \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1 + \dots + w_n = w} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(jw_i) d\sigma_w \quad (9)$$

determine parameters

15

$$c_{0n}(l_1, \dots, l_n), \quad l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, \quad n=1, \dots, N,$$

using a least squares routine to make the right hand side of equation (9) approach the specified output spectrum as closely as possible.

20

The first term on the right hand side of equation (8)

$$\frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jwl_1)\right\}}$$

25

is omitted from (9). The omitted term represents linear output terms in the time or spatial domain realisation of

WO 99/45644

PCT/GB99/00550

the nonlinear system and these may not be needed to achieve the design at this step, hence they are omitted from (9).

2) In order to augment the performance of a filter designed as above, it may be desirable to also design a suitable linear filter $H(jw)$ to improve the approximation to $Y^*(jw)$ obtained in 1) above such that

$$H(jw) = \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_2, \dots, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1 + \dots + w_n = w} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(jw_i) d\sigma_w$$

can achieve a better approximation to $Y^*(jw)$. As part of this linear design the parameters $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$, which were omitted from (8) to get (9), can be obtained from the parameters of the linear filter.

Design 1 hereafter illustrates the design of a nonlinear system using this first case.

(V.2) Secondly, given the input spectrum $U(jw)$, and a specified bound for the magnitude of the required output spectrum, $Y^{B*}(w)$.

A bound $Y^B(w)$ for the magnitude of the output spectrum $Y(jw)$ of the NARX model (1) and (3) can be expressed as

$$Y^B(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} |H_n(jw_1, \dots, jw_n)|_q^B \underbrace{|U| * \dots * |U(jw)|}_n \quad (10)$$

according to the result in Billings, S.A. and Lang, Zi-Qiang, 1996, A bound for the magnitude characteristics of nonlinear output frequency response functions, Part 1:

WO 99/45644

PCT/GB99/00550

Analysis and computation. Int. J. Control, Vol.65, pp309-328, where

$$\underbrace{|U|*...*|U(jw)|}_n$$

5 denotes the n-dimensional convolution integration for the magnitude characteristic of the input spectrum and

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

represents a bound for the GFRFs magnitude

$$|H_n(jw_1, \dots, jw_n)|$$

10 with w_1, \dots, w_n satisfying the constraint $w_1 + \dots + w_n = w$. For the NARX model (1) and (3),

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

can be evaluated as follows

$$15 \quad |H_n(jw_1, \dots, jw_n)|_w^B = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jwl_1) \right|} \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \quad (11)$$

Combining (10) and (11) yields

$$Y^B(w) = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jwl_1) \right|} \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|*...*|U(jw)|}_n \quad (12)$$

where

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

25 Equation (11) enables

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

and $c_{10}(l_1)$, $l_1=1, \dots, K_1$ to be determined for shaping the bound $Y^B(w)$ for $Y(jw)$ in order to make this bound approach $Y^{B*}(w)$. The procedure which can be used to achieve this is

30 as below.

WO 99/45644

PCT/GB99/00550

1) Based upon the equation

$$Y^{B*}(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U|}_{n} (jw) \quad (13)$$

use a least squares routine to make the right hand side of
 5 the above equation approach $Y^{B*}(w)$ especially over the
 frequencies or frequency range to which the required energy
 transformation needs to be implemented. The coefficients C_n
 $n=1, \dots, N$, in equation (13) must be constrained to be
 positive since C_n is the result of the summation of the
 10 modulus of the coefficients $c_{0n}(l_1, \dots, l_n)$,
 $l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n$.

The first term on the right hand side of equation (12)

$$\frac{1}{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw l_1)}$$

15 is omitted from (13). The omitted term represents linear
 output terms in the time or spatial domain realisation.
 These omitted terms may not be needed to achieve the design
 at this step, hence they are omitted from (13).

20

2) If necessary, the approximation to $Y^{B*}(w)$ in 1) above

can be supplemented using a linear filter with a magnitude
 25 characteristic $|H(jw)|$ such that

$$|H(jw)| \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U|}_{n} (jw)$$

provides a better approximation to the specified bound and
 as a result $c_{10}(l_1)$, $l_1=1, \dots, K_1$, which were omitted from
 30 (12) to get (13), can be obtained from the linear filter
 parameters.

WO 99/45644

PCT/GB99/00550

Design 2 hereafter illustrates the detailed procedure of the above and several examples of the design.

(V.3) Thirdly, there are many practical situations which should be dealt with on an individual basis. There follows examples of two such situations.

(a) Referring to figure 3 there is shown an input signal having a spectrum $U(j\omega)$ 300 which comprises a portion 302 of interest, between frequencies a and e , and an portion 304, between frequencies e and b , to be translated to another frequency range 306 defined by frequencies f and $2b$ while retaining the portion of interest 302 within the output signal 308.

In order to realise the energy transformation shown in figure 3, a non-linear system 400 can be constructed as illustrated in figure 4 which comprises means 402, 404 and 406 for implementing the following components

$H_1(j\omega)$, $H_2(j\omega_1, j\omega_2)$, and $H(j\omega)$.

$H_1(j\omega)$ 402 and $H(j\omega)$ 406 can be implemented readily using classical linear band pass filters, while $H_2(j\omega_1, j\omega_2)$ 404 can be constructed in the time or spatial domain as shown in the equation below

$$Y_2(k) = \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

with the parameters, $c_{02}(l_1, l_2)$, $l_1 = 1, \dots, K_2$, $l_2 = 1, \dots, K_2$ being determined to produce the signal $y_2(k)$ with a required frequency characteristic. Each of the components 402, 404

WO 99/45644

PCT/GB99/00550

and 406 have corresponding frequency responses 408, 410 and 412. Consequently, the whole non-linear system can be realised as a non-linear time or spatial domain filter as

$$\begin{aligned} 5 \quad y(k) &= H_1(q^{-1}) u(k) + H(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) \\ &= \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})} u(k) + \frac{H_N(q^{-1})}{H_D(q^{-1})} \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) \end{aligned}$$

where

$$H_1(q^{-1}) = \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})}, \quad H(q^{-1}) = \frac{H_N(q^{-1})}{H_D(q^{-1})}$$

10

are the backward shift operator descriptions of the linear filters which have the frequency response functions $H_1(jw)$ and $H(jw)$, respectively.

15

The equation for $y(k)$ can be further written as

$$H_{1D}(q^{-1}) H_D(q^{-1}) y(k) = H_{1N}(q^{-1}) H_D(q^{-1}) u(k) + H_N(q^{-1}) H_{1D}(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

which is clearly a NARX model that can be described by equations (1) and (3).

20

Although the above shows energy transformation from a frequency band to a higher frequency band, energy can equally well be transferred from one frequency band to a lower frequency band.

25

(b) If the objective of the energy transformation and hence the desired non-linear system is only to distribute energy of the signal to be processed over a wider frequency band without energy amplification then a simpler model may be sufficient. Referring to figure 5, there is shown schematically an input signal 500 in the frequency domain comprising energy between frequencies a and b. The desired output frequency spectrum 502 comprises two portions, a lower frequency portion 504 and a higher frequency portion

30

WO 99/45644

PCT/GB99/00550

506. It will be appreciated that the energy of the input signal 500 is to be spread over the two frequency ranges 504 and 506.

5 A quadratic filter, for example,
 $y(k) = \alpha u^2(k)$

can be designed to redistribute energy of the original signal $u(k)$, with frequency components over the frequency
10 band $[a,b]$, to the new ranges $[0,b-a]$ and $[2a,2b]$ without energy amplification provided an appropriate α is selected in the design process described above.

(vi) The final step in the design process is to
15 materially realise, that is, to physically realise the designed filter using appropriate software or hardware or combination of software and hardware.

Although the present invention has been described above
20 with reference to a NARX model, it will be appreciated that the present invention is not limited thereto. The method and realisation of non-linear systems having pre-determinable frequency or energy transfer characteristics can equally well be utilised using other forms of
25 descriptions of non-linear systems or models where there exists a requirement to transform or transfer energy at one frequency or band of frequencies to energy at another frequency or band of frequencies.

30 The present invention can be used to realise energy transformations over frequencies using a nonlinear system or

WO 99/45644

PCT/GB99/00550

to modify energy transformation of an existing linear or non-linear system.

Furthermore, the present invention can be applied or
5 utilised in the field of design and realisation of
electronic circuits or filters. The energy in the input
signal at a particular frequency or band of frequencies is
transferred to desired frequency bands. Similarly, in
mechanical systems, the addition of non-linear mechanisms
10 could transfer the energy of a vibration at an undesirable
frequency to some other frequency. The present invention
may also find application in the field of fluid mechanics,
for example, in the effects of flow around objects (e.g. oil
platform legs), noise in ducting and pipe flow systems.

15 Alternatively, the modifications which are required to
be effected to a known linear or non-linear system, for
example, a mechanical system, in order to bring about a
particular frequency distribution of energy can be
20 determined using the present invention and then the linear
or non-linear system can be so modified.

II. EXAMPLES

II.1 DESIGN 1

Design No.1 shows an example of how the energy of an
input signal having predetermined frequency components can
be transferred to other frequencies.

30 Consider digitally filtering an input signal

$$u(t) = \cos t + \cos 2t, \quad (14)$$

WO 99/45644

PCT/GB99/00550

wherein the sampling period is $T=1/100$ s.

The first step is to determine the frequency spectrum of the signal to be processed. The frequency spectrum of the signal to be processed comprises input frequencies $w_{a1}=1$ and $w_{a2}=2$.

The second step is to specify the output frequency characteristics of the filter. Two different filtering problems will be considered for this example.

The specification for the first problem is to transfer the energy in $u(t)$ to the output frequency $w_{a0}=0$ and the specification for the second problem is to transfer the energy in $u(t)$ to the output frequency $w_{a0}=4$.

Since the sampling period is $T=1/100$ s, the digital input to the filter is

$$u(k) = \cos \frac{1}{100}k + \cos \frac{2}{100}k \quad \text{for } k=0,1,\dots, \quad (15)$$

the normalised input frequencies are therefore

$$w_{a1}=1/100 \quad \text{and} \quad w_{a2}=2/100,$$

and the required normalised output frequencies are

$w_{a0}=0$ for the first filtering problem and $w_{a0}=4/100$ for the second filtering problem.

For this example, the output frequencies produced by the n th-order nonlinearity of a non-linear filter are distributed uniformly in

WO 99/45644

PCT/GB99/00550

$$f_{v_n} = \begin{cases} \bigcup_{j=0}^{i^*-1} I_j, & \text{when } \frac{nb}{(a+b)} - \left\lfloor \frac{na}{(a+b)} \right\rfloor < 1 \\ \bigcup_{j=0}^{i^*} I_j, & \text{when } \frac{nb}{(a+b)} - \left\lfloor \frac{na}{(a+b)} \right\rfloor \geq 1 \end{cases} \quad (16)$$

where $a = \frac{1}{100}$, $b = \frac{2}{100}$, $[x]$ means to take the integer part of x , and

$$i^* = \left\lfloor \frac{na}{(a+b)} \right\rfloor + 1,$$

5 $I_j = [na - j(a+b), nb - j(a+b)]$ for $j = 0, \dots, i^* - 1$,

$$I_{i^*} = [0, nb - i^*(a+b)],$$

with the difference between any two neighbouring frequencies being $\Delta = \frac{2}{100} - \frac{1}{100} = \frac{1}{100}$.

10 For $n=1$, it can be evaluated from the above equations that

$$f_{v_1} = \left[\frac{1}{100}, \frac{2}{100} \right] \quad (17)$$

and the corresponding output frequencies are

$$\left\{ \frac{1}{100}, \frac{2}{100} \right\}$$

15 For $n=2$, it can be similarly obtained that

$$f_{v_2} = I_0 \cup I_1 = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{4}{100} - \frac{3}{100} \right] = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{1}{100} \right]$$

and the corresponding output frequencies are

$$\left\{ 0, \frac{1}{100}, \frac{2}{100}, \frac{3}{100}, \frac{4}{100} \right\}$$

20 Therefore, a NARX model of up to second order nonlinearity will be sufficient to realise the energy transformations required by the filtering example thereby addressing the third step in the design process.

25 According to the above analysis, select a NARX model of the form

$$y(k) = \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) + \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) \quad (18)$$

WO 99/45644

PCT/GB99/00550

as the basic structure for the non-linear filter and take $K_2=1$ for simplicity. The parameters $K_1, c_{10}(1), \dots, c_{10}(K_1)$ and $c_{02}(k_1, k_2)$, $k_1=0,1$ and $k_2=0,1$, then need to be determined to completely specify the design.

5

In order to derive the procedures for determining these parameters, consider the frequency domain characteristics of the filter model (18). According to J.C.Peyton Jones and S.A.Billings, Recursive Algorithm for Computing the Frequency Response of a Class of Non-linear Difference Equation Models, Int. J. Control, 1989, Vol.50, No.5, 1925-1940, the generalised frequency response functions of this filter model are

$$\begin{cases} H_1(j\omega) = 0 \\ H_2(j\omega_1, j\omega_2) = \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(\omega_1 k_1 + \omega_2 k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(\omega_1 + \omega_2)k_1] \right]} \\ H_n(j\omega_1, \dots, j\omega_n) = 0 \quad \text{for } n \geq 3 \end{cases} \quad (19)$$

15

The output frequency response of the filter (18) under the input

$$u(k) = \cos \frac{1}{100}k + \cos \frac{2}{100}k = \sum_{i=-K, i \neq 0}^K \frac{A(\omega_i)}{2} e^{j\omega_i k}, \quad (20)$$

with $K=2$, $A(\omega_i)=1$, $\omega_i = \frac{i}{100}$, $\omega_{-i} = -\omega_i$, $i = \pm 1, \pm 2$, can be

20

25

written as

$$\tilde{Y}(j\omega) = \sum_{n=1}^N \tilde{Y}_n(j\omega) = \tilde{Y}_2(j\omega) = \begin{cases} \frac{1}{2} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) H_2(j\omega_{i_1}, j\omega_{i_2}) & \text{for } \omega > 0 \\ \frac{1}{4} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) H_2(j\omega_{i_1}, j\omega_{i_2}) & \text{for } \omega = 0 \end{cases} \quad (21)$$

30

WO 99/45644

PCT/GB99/00550

where $i_1, i_2 \in \{-2, -1, +1, +2\}$, $\tilde{Y}(j\omega)$ is related to the output spectrum $Y(j\omega)$ by

$$\tilde{Y}(j\omega) = \begin{cases} 2Y(j\omega) & \text{for } \omega > 0 \\ Y(j\omega) & \text{for } \omega = 0 \end{cases}$$

and, similarly, $\tilde{Y}_n(j\omega)$ is related to the n th-order output spectrum $Y_n(j\omega)$ by

$$\tilde{Y}_n(j\omega) = \begin{cases} 2Y_n(j\omega) & \text{for } \omega > 0 \\ Y_n(j\omega) & \text{for } \omega = 0 \end{cases}$$

This is a specific form of the general expression for output frequency responses of non-linear systems which are given by

$$Y(j\omega) = \sum_{n=1}^N Y_n(j\omega) \quad (22)$$

10 where

$$Y_n(j\omega) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{\omega_1 + \dots + \omega_n = \omega} H_n(j\omega_1, \dots, j\omega_n) \prod_{i=1}^n U(j\omega_i) d\sigma_w \quad (23)$$

with

$$\int_{\omega_1 + \dots + \omega_n = \omega} (.) d\sigma_w$$

denoting an integration over the n th-dimensional hyper-plane

15 $\omega_1 + \dots + \omega_n = \omega$ and N being the maximum order of the dominant system nonlinearities.

WO 99/45644

PCT/GB99/00550

Substituting (19) into (21) yields

$$\begin{aligned}
\tilde{Y}(j\omega) &= \frac{1}{2} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(\omega_{i_1} k_1 + \omega_{i_2} k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(\omega_{i_1} + \omega_{i_2}) k_1]\right]} \\
&= \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{1}{2} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) \exp[-j(\omega_{i_1} k_1 + \omega_{i_2} k_2)] \\
&= H(j\omega) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(\omega, k_1, k_2) \quad \text{for } \omega > 0
\end{aligned} \tag{24}$$

5 and

$$\tilde{Y}(j\omega) = H(j\omega) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(\omega, k_1, k_2)}{2} \quad \text{for } \omega = 0 \tag{25}$$

where

$$H(j\omega) = \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]} \tag{26}$$

$$f(\omega, k_1, k_2) = \frac{1}{2} \sum_{\omega_{i_1} + \omega_{i_2} = \omega} A(\omega_{i_1}) A(\omega_{i_2}) \exp[-j(\omega_{i_1} k_1 + \omega_{i_2} k_2)] \tag{27}$$

Moreover denoting

$$\bar{Y}(j\omega) = \begin{cases} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(\omega, k_1, k_2) & \text{for } \omega > 0 \\ \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(\omega, k_1, k_2)}{2} & \text{for } \omega = 0 \end{cases} \tag{28}$$

gives

$$15 \quad \tilde{Y}(j\omega) = H(j\omega) \bar{Y}(j\omega), \quad \omega \geq 0 \tag{29}$$

In view of the fact that $H(j\omega)$ is the frequency response function of a classical linear filter and $\bar{Y}(j\omega)$ is a linear function of the filter parameters $c_{02}(k_1, k_2)$, $k_1=0,1$ and $k_2=0,1$, the procedures for determining the parameters of the non-linear filter with the given design requirements and the structure (18) are given as :

WO 99/45644

PCT/GB99/00550

(a) From the design requirements, determine the desired output frequency characteristic $\tilde{Y}^*(j\omega)$ and choose the parameters $c_{02}(k_1, k_2)$, $k_1 = 0, 1$ and $k_2 = 0, 1$, appropriately to make $\bar{Y}(j\omega)$ approximate $\tilde{Y}^*(j\omega)$ as well as possible.

5

(b) Examine the filtering effect of

$$\bar{Y}(k) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}(k_1, k_2) u(k-k_2) u(k-k_2), \quad (30)$$

where $\hat{c}_{02}(k_1, k_2)$, $k_1 = 0, 1$, $k_2 = 0, 1$, are the results obtained in the procedure (a). If the effect is acceptable, then

10 choose $H(j\omega) = 1$ so that the filter parameters

$$c_{10}(1) = c_{10}(2) = \dots = c_{10}(K_1) = 0;$$

otherwise design the classical linear filter $H(j\omega)$ to make $H(j\omega)\bar{Y}(j\omega)$ satisfy the requirements for the output frequency characteristics and obtain the filter parameters

15 $K_1, c_{10}(1), c_{10}(2), \dots, c_{10}(K_1)$ at the same time.

Therefore, in order to address the first problem to transfer energy from $u(t)$, $w_{a1} = 1$ and $w_{a2} = 2$, to the output frequency $w_{a0} = 0$, take

$$20 \quad \tilde{Y}^*(j0) = 1, \quad \tilde{Y}^*(jw_i) = 0, \quad w_i = \frac{i}{100}, \quad i = 1, 2, 3, 4.$$

and for the second problem to transfer energy from $u(t)$, $w_{a1} = 1$ and $w_{a2} = 2$, to the output frequency $w_{a0} = 4$, take

$$\tilde{Y}^*(j\frac{4}{100}) = 1, \quad \tilde{Y}^*(jw_i) = 0, \quad w_i = \frac{i}{100}, \quad i = 1, 2, 3, 0.$$

25 The filter parameters $\hat{c}_{02}(k_1, k_2)$, $k_1 = 0, 1$, $k_2 = 0, 1$, can then be determined through the group equations

WO 99/45644

PCT/GB99/00550

$$\begin{cases}
 \operatorname{Re}[\tilde{Y}^*(j0)] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^R(0, k_1, k_2)}{2} \\
 \vdots \\
 \operatorname{Re}\left[\tilde{Y}^*\left(j\frac{4}{100}\right)\right] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^R\left(\frac{4}{100}, k_1, k_2\right) \\
 \operatorname{Im}[\tilde{Y}^*(j0)] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^I(0, k_1, k_2)}{2} \\
 \vdots \\
 \operatorname{Im}\left[\tilde{Y}^*\left(j\frac{4}{100}\right)\right] = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^I\left(\frac{4}{100}, k_1, k_2\right)
 \end{cases} \quad (31)$$

by the least square's method. In (31) $f^R(\cdot)$ and $f^I(\cdot)$ represent the real and imaginary parts of $f(\cdot)$.

5

Rewrite (31) as

$$\tilde{Y} = X\theta \quad (32)$$

WO 99/45644

PCT/GB99/00550

where

$$\tilde{Y} = \left[\operatorname{Re}[\tilde{Y}^*(j0)], \dots, \operatorname{Re}[\tilde{Y}^*(j\frac{4}{100})], \operatorname{Im}[\tilde{Y}^*(j0)], \dots, \operatorname{Im}[\tilde{Y}^*(j\frac{4}{100})] \right]^T \quad (33)$$

$$5 \quad \theta = [c_{02}(0,0), c_{02}(1,1), c_{02}(0,1) + c_{02}(1,0)]^T \quad (34)$$

$$\bar{X} = \begin{bmatrix} \frac{f^R(0,0,0)}{2}, & \frac{f^R(0,1,1)}{2}, & \frac{f^R(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^R(\frac{4}{100}, 0, 0), & f^R(\frac{4}{100}, 1, 1), & f^R(\frac{4}{100}, 0, 1) \\ \frac{f^I(0,0,0)}{2}, & \frac{f^I(0,1,1)}{2}, & \frac{f^I(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^I(\frac{4}{100}, 0, 0), & f^I(\frac{4}{100}, 1, 1), & f^I(\frac{4}{100}, 0, 1) \end{bmatrix}$$

$$= \begin{bmatrix} \frac{4}{2} & \frac{4}{2} & \sum_{i=-2}^2 \frac{\cos \frac{i}{100}}{2} \\ 2 & 2 \cos \frac{1}{100} & \cos \frac{2}{100} + \cos \frac{1}{100} \\ 1 & \cos \frac{1}{100} & \cos \frac{1}{100} \\ 2 & 2 \cos \frac{3}{100} & \cos \frac{1}{100} + \cos \frac{2}{100} \\ 1 & \cos \frac{4}{100} & \cos \frac{2}{100} \\ \frac{0}{2} & \frac{0}{2} & \sum_{i=-2}^2 \frac{\sin \frac{i}{100}}{2} \\ 0 & -2 \sin \frac{1}{100} & \sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{2}{100} & -\sin \frac{1}{100} \\ 0 & -2 \sin \frac{3}{100} & -\sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{4}{100} & -\sin \frac{2}{100} \end{bmatrix} \quad (35)$$

Notice that θ can be written in the form of (34) due to the fact that

$$10 \quad f(w, 0, 1) = f(w, 1, 0). \quad (36)$$

Therefore, the filter parameters θ for the first filtering problem to transfer energy from $u(t)$,

$w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=0$ can be

15 obtained as

$$\hat{\theta}_1 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \bar{Y}_1 \quad (37)$$

where

$$\bar{Y}_1 = \left[\overbrace{1, 0, \dots, 0}^4, \overbrace{0, 0, \dots, 0}^4 \right]^T, \quad (38)$$

WO 99/45644

PCT/GB99/00550

and the parameters θ for the second filtering problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=4$ can be obtained as

$$\hat{\theta}_2 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \bar{Y}_2 \quad (39)$$

5 where

$$\bar{Y}_2 = \left[\overbrace{0, \dots, 0}^4 \quad 1 \quad \overbrace{0, \dots, 0}^5 \right]^T. \quad (40)$$

The results of computing (37) and (39) are

$$\hat{\theta}_1 = \begin{bmatrix} \hat{C}_{02}^1(0,0) \\ \hat{C}_{02}^1(1,1) \\ \hat{C}_{02}^1(0,1) + \hat{C}_{02}^1(1,0) \end{bmatrix} = \begin{bmatrix} 1187 \\ 1187 \\ -2373.8 \end{bmatrix} \quad (41)$$

and

$$10 \quad \hat{\theta}_2 = \begin{bmatrix} \hat{C}_{02}^2(0,0) \\ \hat{C}_{02}^2(1,1) \\ \hat{C}_{02}^2(0,1) + \hat{C}_{02}^2(1,0) \end{bmatrix} = \begin{bmatrix} -1206.2 \\ -1206.2 \\ 2413.2 \end{bmatrix} \quad (42)$$

respectively.

Under the input of (20), the power spectral densities of the input and output of the non-linear filter

$$15 \quad \begin{aligned} \bar{Y}_1(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{C}_{02}^1(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{C}_{02}^1(0,0) u^2(k) + \hat{C}_{02}^1(1,1) u^2(k-1) + [\hat{C}_{02}^1(1,0) + \hat{C}_{02}^1(0,1)] u(k-1) u(k) \end{aligned} \quad (43)$$

which is initially designed to address the first filtering problem above, are shown in figure 6, and the power spectral

20 densities of the input and output of the non-linear filter

WO 99/45644

PCT/GB99/00550

$$\begin{aligned}\bar{y}_2(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^2(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{c}_{02}^2(0,0) u^2(k) + \hat{c}_{02}^2(1,1) u^2(k-1) + [\hat{c}_{02}^2(1,0) + \hat{c}_{02}^2(0,1)] u(k-1) u(k)\end{aligned}\quad (44)$$

which is initially designed to address the second filtering
5 problem above, are shown in figure 7.

Further improvement to the performances of the filters
(43) and (44) may be possible. Therefore, a linear filter,
 $H(jw)$, is designed in order to further improve the filter
10 performances.

To improve the performance of the filter (43) for the
first filtering problem, $H(jw)$ is designed to be a fifth
order low-pass type 1 Chebyshev filter with cut off
15 frequency 0.5 rad/sec and 0.5 dB of ripple in the pass-band
to ensure a satisfactory frequency response over the pass
band. The result is

$$\begin{aligned}H_1(jw) &= \frac{b^1(1) + b^1(2)z^{-1} + \dots + b^1(6)z^{-5}}{1 - a^1(2)z^{-1} - \dots - a^1(6)z^{-5}} \Big|_{z=e^{jw}} \\ &= 10^{-12} \frac{0.0174 + 0.0853z^{-1} + 0.1812z^{-2} + 0.1652z^{-3} + 0.0933z^{-4} + 0.0159z^{-5}}{1 + 4.9941z^{-1} - 9.9765z^{-2} + 9.9648z^{-3} - 4.9766z^{-4} + 0.9942z^{-5}} \Big|_{z=e^{jw}}\end{aligned}\quad (45)$$

To improve the performance of the filter (44) for the
second problem, $H(jw)$ is designed to be a fifth order high-
pass type 1 Chebyshev filter with cut off frequency 3.9
rad/sec and 0.5 dB of ripple in the pass band for the same
25 purpose as in the first problem case. The result is

$$\begin{aligned}H_2(jw) &= \frac{b^2(1) + b^2(2)z^{-1} + \dots + b^2(6)z^{-5}}{1 - a^2(2)z^{-1} - \dots - a^2(6)z^{-5}} \Big|_{z=e^{jw}} \\ &= \frac{0.9218 - 4.6088z^{-1} + 9.2175z^{-2} - 9.2175z^{-3} + 4.6088z^{-4} - 0.9218z^{-5}}{1 + 4.8381z^{-1} - 9.3635z^{-2} + 9.0613z^{-3} - 4.3846z^{-4} + 0.8486z^{-5}} \Big|_{z=e^{jw}}\end{aligned}\quad (46)$$

The purpose of the additional linear filter is to
attenuate unwanted frequency components in the outputs of
30

WO 99/45644

PCT/GB99/00550

the filters (43) and (44) for the above two filtering problems respectively to make the output of the additional filter satisfy the corresponding design requirement.

- 5 It will be appreciated that the filter parameters $K_1, c_{10}(1), \dots, c_{10}(K_1)$, associated with the expression $\left\{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]\right\}$ in $H(j\omega)$ can be obtained as a result of dividing the denominator of $H(j\omega)$ by the numerator of $H(j\omega)$. The specific $H(j\omega)$ is given by $H_1(j\omega)$ and $H_2(j\omega)$ in
 10 equations (45) and (46) for the two filtering problems respectively.

- The general description for the nonlinear filters
 15 designed as above is

$$y(k) - \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) = \left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right] y(k) = \bar{H}(q^{-1}) y(k) \\ = \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) = \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} u(k) \quad (47)$$

where

$$20 \quad \bar{H}(q^{-1}) = \left(1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right), \quad (48)$$

and q^{-1} , q_1^{-1} and q_2^{-1} denote the backward shift operators. Another expression in the time domain for (47) is

$$y(k) = \bar{H}^{-1}(q^{-1}) \left[\sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} \right] u(k) \quad (49)$$

- 25 Therefore, embodiments of the non-linear filters which have been designed can be realised in a manner as shown in figure 8 or more specifically as shown figure 9.

- It will be appreciated that in figure 8 the two
 30 components 800 and 802 are represented by

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

WO 99/45644

PCT/GB99/00550

and

$$G_2(q^{-1}) = \bar{H}^{-1}(q^{-1}) = \frac{b(1) + b(2)q^{-1} + \dots + b(6)q^{-5}}{1 - a(2)q^{-1} - \dots - a(6)q^{-5}}$$

For the first filtering problem in this example

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^1(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

5 with $\hat{c}_{02}^1(k_1, k_2)$'s given by (41) and

$$G_2(q^{-1}) = \frac{b^1(1) + b^1(2)q^{-1} + \dots + b^1(6)q^{-5}}{1 - a^1(2)q^{-1} - \dots - a^1(6)q^{-5}}$$

with $b^1(i)$'s and $a^1(i)$'s given by (45).

For the second filtering problem in this example

$$10 \quad G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^2(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

with $\hat{c}_{02}^2(k_1, k_2)$'s given by (42) and

$$G_2(q^{-1}) = \frac{b^2(1) + b^2(2)q^{-1} + \dots + b^2(6)q^{-5}}{1 - a^2(2)q^{-1} - \dots - a^2(6)q^{-5}}$$

with $b^2(i)$'s and $a^2(i)$'s given by (46).

15 Referring to figures 10 and 11, there is shown the filtering effects of the filters designed to address the two filtering problems. Figure 10 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the first filtering problem.

20 Figure 11 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the second filtering problem. The effects of the filtering in the time domain of the two filters are shown in figures 12 and 13. All the responses indicate that the

25 filters substantially satisfy the design requirements.

WO 99/45644

PCT/GB99/00550

II.2 DESIGN 2

Design No.2 illustrates the detailed procedure and several examples for designing a non-linear system for transferring the energy of a signal from a first predeterminable frequency or range of frequencies to a second predeterminable frequency or range of frequencies such that the output frequency response of the nonlinear system so designed is within specified bounds.

II.2.1 Detailed Procedure

(1) Given $u(t)$, the signal to be processed in the time or spatial domain, the frequency band $[c,d]$ to which the energy of $u(t)$ is to be transferred, and the user specified bound $Y^B(w)$ for the output spectrum $Y(jw)$ over $[c,d]$ for the design.

(2) Sample the time or spatial domain signal $u(t)$ with sampling interval T to yield a discrete series $\{u(k)\}$ and perform a Fast Fourier Transform (FFT) on the series to compute the spectrum $U(jw)$ of $u(t)$ as

$$U\left(j\frac{2\pi}{MT}l\right) = TU_d\left(j\frac{2\pi}{M}l\right), \quad l = -\left(\frac{M}{2}-1\right), \dots, 0, \dots, \frac{M}{2}$$

where $U_d[j(\cdot)]$ is the result of the FFT operating on $\{u(k)\}$ and M is the length of the data used to perform the FFT. M is taken as an even number for convenience.

(3) Evaluate the range $[a,b]$ of frequencies in $u(t)$ as

$$b = \frac{2\pi}{MT}l_b, \quad a = \frac{2\pi}{MT}l_a$$

WO 99/45644

PCT/GB99/00550

where l_b is an integer such that

$$\left| U\left(j\frac{2\pi}{MT}l_b\right) \right| \geq 0.05, \quad \left| U\left(j\frac{2\pi}{MT}l\right) \right| < 0.05 \quad \text{for } l \in \{(l_b+1), \dots, \frac{M}{2}\}$$

and l_a is an integer such that

$$\left| U\left(j\frac{2\pi}{MT}l_a\right) \right| \geq 0.05, \quad \left| U\left(j\frac{2\pi}{MT}l\right) \right| < 0.05 \quad \text{for } l \in \{0, \dots, (l_a-1)\}$$

- 5 (4) The relationship between the bound of the output spectrum $Y^B(w)$, the coefficients of the NARX model

$$y(k) = \sum_{n=1}^N y_n(k)$$

$$y_n(k) = \begin{cases} \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases}$$

- 10 and the spectrum $U(jw)$ is given by

$$Y^B(w) = \frac{1}{1 - \sum_{l=1}^{K_1} c_{10}(l_1) \exp(-jw l_1)} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} \left[\sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \right] \underbrace{|U|^* \dots |U|}_n(jw)$$

$$= \frac{1}{1 - \sum_{l=1}^{K_1} c_{10}(l_1) \exp(-jw l_1)} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} c_n \underbrace{|U|^* \dots |U|}_n(jw)$$

where

$$c_n = \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

- 15 are parameters associated with the NARX model parameters

$$K_n, c_{0n}(l_1, \dots, l_n), \quad l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \quad \text{for } n = N_0, \dots, N,$$

$\underbrace{|U|^* \dots |U|}_n(jw)$ denotes the n -dimensional convolution

integration for the magnitude $|U(jw)|$ of the spectrum $U(jw)$, which is defined by

WO 99/45644

PCT/GB99/00550

$$\underbrace{|U|^* \dots |U|}_{n} (jw) \approx \int_{-\infty}^{\infty} \dots \int_{-\infty}^{\infty} |U(jw_1)| \dots |U(j(w-w_1-\dots-w_{n-1}))| dw_1 \dots dw_{n-1}$$

and $N_0=1$ when the NARX model involves nonlinear terms from order 1 to N .

5 Based upon this expression, the structure parameters N and N_0 and the NARX model parameters are determined as below.

(i) Evaluate

$$f_n = \begin{cases} \bigcup_{i=1}^{i'-1} I_i & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{i=0}^{i'} I_i & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases}$$

10 where $[x]$ denotes the integer part of x ,

$$i' = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_i = [na - i(a+b), nb - i(a+b)], \text{ for } i=0, \dots, i'-1$$

$$I_{i'} = [0, nb - i'(a+b)]$$

15 for $n=1, 2, \dots$ until a value of n is reached such that part of the specified output frequency range $[c, d]$ falls into f_n . This value of n is used as the value of N_0 .

(ii) Evaluate

$$f_r = f_n \cup f_{n-1}$$

20 For $n=2, 3, \dots$ until a value of n is reached such that the frequency range $[c, d]$ falls completely within the corresponding f_r . This value of n is taken as the value of N .

(iii) Calculate

$$25 \quad \underbrace{|U|^* \dots |U|}_{n} (jw)$$

WO 99/45644

PCT/GB99/00550

to yield

$$\underbrace{|U|^* \dots |U|}_{n} (j 2\pi i / MT), \quad \text{for } i=0, \dots, M/2$$

using the algorithm

$$\left\{ \begin{array}{l} \underbrace{|U|^* \dots |U|}_{n} (j 2\pi i / MT) = r \tilde{U} \left[i + \left(\frac{M}{2} - 1 \right) n \right] \left(\frac{2\pi}{M} \right)^{(n-1)}, \quad i=0, \dots, \frac{M}{2} \\ \{ \tilde{U}(0), \dots, \tilde{U}[n(M-1)] \} = \text{Conv} \left\{ \underbrace{\{ \tilde{U}(0), \dots, \tilde{U}(M-1) \}}_n, \dots, \{ \tilde{U}(0), \dots, \tilde{U}(M-1) \} \right\} \\ \tilde{U}(1) = \left| U_d \left[j \frac{2\pi}{M} \left(i - \frac{M}{2} + 1 \right) \right] \right|, \quad i=0, 1, \dots, M-1 \end{array} \right.$$

5 for $n=N_0, \dots, N$, where $\text{Conv}(\cdot)$ denotes the convolution operation and $\tilde{U}(\cdot)$ and $\tilde{\tilde{U}}(\cdot)$ represent the intermediate results of this algorithm.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$Y^s \left(\frac{2\pi}{MT} i \right) = \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|^* \dots |U|}_{n} \left[j \left(\frac{2\pi i}{MT} \right) \right], \quad i=i_c, i_c+1, \dots, i_d$$

10 where $i_c = \text{round} \left[\frac{cMT}{2\pi} \right]$, $i_d = \text{round} \left[\frac{dMT}{2\pi} \right]$, and $\text{round}(x)$ means to take the integer nearest to x , use a least squares routine to compute

$$C_n, \quad n=N_0, \dots, N,$$

under the constraint that the results must be positive, and then select the NARX model parameters

$$K_n, c_{0n}(l_1, \dots, l_n), \quad l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n$$

for $n=N_0, \dots, N$

Under the constraints on the summation of the modulus of the coefficients given by

$$20 \quad C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n=N_0, \dots, N$$

(v) If necessary, design a classical linear filter, for example, a band pass filter which ideally allows the frequency response to be unity over the frequency

WO 99/45644

PCT/GB99/00550

band [c,d] and zero beyond to yield the linear frequency characteristic

$$\frac{1}{1 - \sum_{l_1=1}^{K_1} c_{l_0}(l_1) \exp(-j\omega l_1)}$$

and therefore determine the parameters associated with K_1 , $c_{l_0}(l_1)$, $l_1 = 1, \dots, K_1$. Otherwise, all of the parameters of $c_{l_0}(\cdot)$ can be taken as zero to yield a model having no regression terms associated with the output.

(5) Construct a NARX model as shown in figure (14) using the results obtained in the above (iv) and (v). The nonlinear system illustrated in figure 14 comprises a nonlinear part 1400 and a linear part 1402. It will be appreciated that in figure 14

$$\sum_{l_1, l_2=1}^K c_{m_1}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^K \dots \sum_{l_n=1}^K c_{m_1}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

II.2.2 Three Specific Examples

Example 1

This example illustrates a further implementation or design of a nonlinear system following the above detailed procedure.

WO 99/45644

PCT/GB99/00550

(1) The signal to be processed is given by

$$u(t) = 2M_u \frac{1 \sin \alpha t - \sin \beta t}{2\pi t}$$

with $\alpha=3.3$, $\beta=1$, and $M_u=1.6$. The frequency spectrum $U(j\omega)$ of the signal is shown in figure 15 indicating that the real input frequency range is $[1, 3.3]$. The requirement for the design is to transfer energy of the original signal to the frequency band $[c, d]=[5.6, 7.6]$ with the bound on the output spectrum magnitude specified to be $Y^*(\omega)=1.6$ over this frequency band.

(2) Sample $u(t)$ with sampling interval $T=0.01$ sec to produce

$$u(k) = 2M_u \frac{1 \sin \alpha kT - \sin \beta kT}{2\pi kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and perform a Fast Fourier Transform (FFT) on this series ($M=4000$) to compute

$$U_d\left(j\frac{2\pi}{M}l\right) = U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

and then to yield

$$U\left(j\frac{2\pi}{Ml}l\right) = U\left(j\frac{2\pi}{4000 \times 0.01}l\right) = 0.01 U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

the result of which, in the nonnegative frequency range, is shown in figure 16.

Notice the difference between the real spectrum of $u(t)$ in figure 15 and the computed spectrum in figure 16. The differences are due to the errors caused by the FFT operation. The design should and will be performed based upon the computed spectrum to lead to more practical results.

WO 99/45644

PCT/GB99/00550

(3) Evaluate the frequency range $[a,b]$ of $u(t)$ from the computed spectrum giving

$$a=0.6283 \quad b=3.7699$$

(4) Design the system structure and parameters

5 (i) Determination of N_0 .

Clearly, the output frequency range contributed by the linear part when the input frequencies are within $[a,b]=[0.6283, 3.7699]$ is

$$f_k = [a,b] = [0.6283, 3.7699]$$

10 The frequency range f_k produced by the second order nonlinearity in this case is obtained as follows.

Since $n=2$,

$$15 \quad \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] = \frac{2 \times 3.7699}{(3.7699 + 0.6283)} - \left[\frac{2 \times 0.6283}{(3.7699 + 0.6283)} \right] \\ = 1.7143 - [0.2857] = 1.7143 - 0 > 1$$

and

$$i' = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{2 \times 0.6283}{3.7699 + 0.6283} \right] + 1 = [0.2857] + 1 = 0 + 1 = 1$$

So

$$20 \quad f_k = \bigcup_{i=0}^{i'} [na-i(a+b), nb-i(a+b)] \cup [0, nb-i'(a+b)] \\ = [na, nb] \cup [0, nb-(a+b)] = [2 \times 0.6283, 2 \times 3.7699] \cup [0, 2 \times 3.7699 - (0.6283 + 3.7699)] \\ = [1.2566, 7.5398] \cup [0, 3.1416] = [0, 7.5398]$$

f_k thereby obtained contains part of the specified output frequency range $[c,d]=[5.6, 7.6]$. So, N_0 is determined to be $N_0=2$.

(ii) Determination of N .

WO 99/45644

PCT/GB99/00550

Evaluating $f_i = f_x \cup f_{x_n}$ for $n=2$ yields

$$f_i|_{n=2} = f_x \cup f_{x_2} = [0, 7.5398] \cup [0.6283, 3.7699] = [0, 7.5398]$$

To evaluate $f_v|_{n=3} = f_x \cup f_{x_3}$, calculate f_x first. In this case

$$\begin{aligned} \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] &= \frac{3 \times 3.7699}{(3.7699 + 0.6283)} - \left[\frac{3 \times 0.6283}{(3.7699 + 0.6283)} \right] \\ &= 2.5714 - [0.4286] = 2.5714 - 0 > 1 \end{aligned}$$

$$i^* = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{3 \times 0.6283}{3.7699 + 0.6283} \right] + 1 = [0.4286] + 1 = 0 + 1 = 1$$

So

$$\begin{aligned} f_x &= \bigcup_{i=0}^{i^*} I_i = I_0 \cup I_1 = [na, nb] \cup [0, nb - (a+b)] \\ &= [3 \times 0.6283, 3 \times 3.7699] \cup [0, 3 \times 3.7699 - (0.6283 + 3.7699)] \\ &= [1.8848, 11.3097] \cup [0, 6.9115] = [0, 11.3097] \end{aligned}$$

Therefore

$$f_v|_{n=3} = f_x \cup f_{x_3} = [0, 7.5398] \cup [0, 11.3097] = [0, 11.3097]$$

$f_v|_{n=3}$ thereby obtained includes the whole specified output frequency range [5.6, 7.6]. N is therefore determined to be $N=3$.

(iii) Calculate $\underbrace{|U| \cdots |U|}_n(jw)$ for $n=N_0=2$ and $n=N=3$, respectively to yield

$$\underbrace{|U| \cdots |U|}_n(j2\pi i/M) = \underbrace{|U| \cdots |U|}_n(j2\pi i/4000 \times 0.01) \quad i=0, \dots, 4000/2, n=2 \text{ and } 3$$

The results are shown in figure 17.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$\begin{aligned} Y^{2*}(\pi i/2000 \times 0.01) &= 1.6 = \frac{1}{2\pi} C_2 |U| * |U(j\pi i/2000 \times 0.01)| \\ &\quad + \frac{1}{(2\pi)^2} C_1 |U| * |U| * |U(j\pi i/2000 \times 0.01)| \end{aligned}$$

$$i = i_c, i_{c+1}, \dots, i_{d-1}, i_d$$

with

WO 99/45644

PCT/GB99/00550

$$i_c = \text{round}[cMT/2\pi] = \text{round}[5.6 \times 4000 \times 0.01/2 \times \pi] = 36$$

$$i_d = \text{round}[dMT/2\pi] = \text{round}[7.6 \times 4000 \times 0.01/2 \times \pi] = 48$$

use a least squares routine under the constraint of nonnegative solutions to compute C_2 and C_3 , that is, to determine C_2 and C_3 , under the constraints of $C_2 \geq 0$ and $C_3 \geq 0$, to minimise the following expression

$$\sum_{n=1}^{i_c} \left[1.6 - \frac{1}{2\pi} C_2 |u * u(j\pi i/2000 \times 0.01)| - \frac{1}{(2\pi)^2} C_3 |u * u * u(j\pi i/2000 \times 0.01)| \right]^2$$

The results obtained are

$$C_2 = 0 \quad \text{and} \quad C_3 = 3.8367$$

(v) Design, optionally, a linear Butterworth band pass filter to attenuate the frequency components beyond the frequency band $[c, d] = [5.6, 7.6]$ to yield the linear frequency characteristic

$$\frac{10^{-3}(0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}} \quad | q = e^{j\omega}$$

WO 99/45644

PCT/GB99/00550

(5) Construct a NARX model as shown in figure 14 with

$$N_0 = 2, N = 3, K_2 = K_3 = 1, c_{02}(1,1) = 0, c_{03}(1,1,1) = 3.8367,$$

that is,

$$\begin{aligned} \sum_{n=0}^N \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) &= \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \\ &\quad \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= \sum_{l_1=1}^1 \sum_{l_2=1}^1 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \\ &\quad \sum_{l_1=1}^1 \sum_{l_2=1}^1 \sum_{l_3=1}^1 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1)u^2(k-1) + c_{03}(1,1,1)u^3(k-1) = 0 \times u^2(k-1) + 3.8367u^3(k-1) = 3.8367u^3(k-1) \end{aligned}$$

and

$$\left[1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) q^{-1} \right]^{-1} = \frac{10^{-3}(0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}}$$

which determines the parameters associated with the NARX
10 model parameters K_i and $c_{i0}(l_i)$, $l_i = 1, \dots, K_i$.

The output frequency response under the given input is
shown in figure 18 indicating that the energy has been
transferred to the specified frequency band $[c, d] = [5.6, 7.6]$
15 with the magnitude of the response below the specified bound
1.6.

The frequency response of the above design is examined
for other input signals below.

WO 99/45644

PCT/GB99/00550

In the first case, consider

$$u(t) = \frac{2M_u}{\pi(b-a)t^2} \left[2\cos \frac{(a+b)t}{2} - \cos bt - \cos at \right]$$

where a , b , and M_u are defined as above. The frequency spectrum of the signal is shown in figure 19. The frequency range is clearly the same as that of the signal having the spectrum given in figure 15 and the magnitude of the spectrum also satisfies the condition that

$$|U(j\omega)| \leq M_u = 1.6$$

This implies that the frequency response of the designed system to this $u(t)$ should in theory also transfer energy into the frequency band $[c, d] = [5.6, 7.6]$ with the output magnitude frequency response being less than $Y^*(\omega) = 1.6$ over this frequency band. Figure 20 shows this frequency response and indicates that the actual result is consistent with the theoretical predictions.

For the second case, $u(t)$ was taken as a random process with the frequency spectrum given in figure 21. The frequency spectrum is substantially within the frequency range $[1, 3, 3]$ with a magnitude of less than 1.6. Therefore, the same conclusion should apply for the output magnitude frequency response of the designed system to this random input. Figure 22 shows this response and indicates that the energy is transferred to a new frequency band of substantially $[5.6, 7.6]$. Note that the magnitude of the output spectrum over this frequency band is well below the specified bound $Y^*(\omega) = 1.6$. This is because of the effect of the attenuation which is due to intrakernel interference of the nonlinear mechanism.

The nonlinear filter which has been designed above can be represented by the block diagram shown in figure 23. This

WO 99/45644

PCT/GB99/00550

could be realised electronically by following the approach used to realise Design 1 in figure 9. However, for some applications the design may need to be realised in continuous time. Using the bilinear transformation

$$q = \frac{1 + (T/2)s}{1 - (T/2)s}$$

where $T=0.01$ is the sampling interval, q^{-1} is the delay operator, and s is the Laplace Transform operator and substituting in the discrete time design in figure 23 provides the equivalent continuous time system shown in figure 24. Simulating the system in figure 24 produces almost identical responses as the discrete time system response of figure 18.

The system in figure 24 could for example be realised mechanically as illustrated schematically in figure 25 where the cubic device is either a material which exhibits a cubic response or is implemented as an actuator which takes $u_1(t)$ as input and produces an actuation output $u_2(t)$ which is proportional to the cubic power of the input.

One possible application of this design would be in vibration isolation. For example it may be required to transfer energy from an input frequency range [1,3.3] to the frequency range [5.6,7.6]. The new design could be used to achieve this effect.

Other much more complicated designs for vibration isolation can be achieved based on the present invention. The design procedure would be exactly as described above but the realisation would involve the synthesis of dampers, damping materials or actuators with the nonlinear dynamic characteristics specified by the designs.

Example 2

WO 99/45644

PCT/GB99/00550

Example 2 shows an application of the design above to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects.

When using linear structures for the attenuation of signal energy in a physical system, the attenuated energy is usually absorbed by devices such as dampers in mechanical systems and resistors in electronic circuits and transformed to other energy forms such as thermal energy. This may lead to undesirable effects and measures, such as using radiating devices, sometimes have to be taken to compensate for these effects. When a nonlinear system is employed, instead of attenuating the signal energy directly as in the linear case, the signal energy at a frequency of interest can be spread over a wider frequency band and attenuated by means of the counteractions between different terms which compose the output spectrum. This means that, to a certain extent, a nonlinear design for signal energy attenuation can reduce the requirements for using energy absorption devices and is of great benefit in practical applications.

Another important application would be, for example, in the design of the foundations or the modification of the characteristics of buildings and structures which are in earthquake zones. The objective in such an application would be to design materials or actuators, tuned as required for each structure, which transfer the damaging input energy from an earthquake to another more acceptable frequency band or spread the energy to be within an acceptable bound over a desired frequency range. Spreading the energy using the present design should produce significant reductions in earthquake damage.

- (1) Design a nonlinear system to attenuate the energy of the signal

WO 99/45644

PCT/GB99/00550

$$u(t) = \frac{2M_u}{\pi(a-b)t^2} \left[2\cos\left(\frac{a+b}{2}t\right) - \cos a t - \cos b t \right]$$

where $a=3.3$, $b=1$, $M_u=1.6$.

- (2) The spectrum of the signal is evaluated. This is implemented by sampling the signal with sampling interval $T=0.01\text{sec}$ to produce

$$u(k) = \frac{2M_u}{\pi(\alpha-\beta)(kT)^2} \left[2\cos\left(\frac{\alpha+\beta}{2}kT\right) - \cos \alpha kT - \cos \beta kT \right]$$

$$k = -1999, \dots, 0, \dots, 2000$$

and perform a Fast Fourier Transform (FFT) on this series. The result of the FFT is shown in figure 26.

10

- (3) Evaluate the range $[a,b]$ of frequencies in the signal based on the computed spectrum. The evaluation gives

$$a=1.0996 \quad b=3.1416$$

This is because the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [1.0996, 3.1416]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w$$

- (4) Assume that, as part of the design, output frequency range is $[c,d]=[0, 7.3]$ and the required bound over this frequency band is $Y^*(w)=1$.

- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, N_0 , N_n and C_n , $n=N_0, \dots, N$ were determined as follows.

(i) N_0

N_0 is determined to be $N_0=1$. This is because

$$f_{y_1} = [a,b] = [1.0996, 3.1416] \in [0, 7.3] = [c, d]$$

where f_{y_1} denotes the output frequency band contributed by the system linear part, and part of the selected output frequency range falls into the linear output frequency range f_{y_1} .

50

SUBSTITUTE SHEET (RULE 26)

WO 99/45644

PCT/GB99/00550

(ii) N

In this case, it can be obtained using $a=1.0990$ and $b=3.1416$ that

$$f_x = [2.1992, 6.2832] \cup [0, 2.0420]$$

$$f_y = [0, 9.4248]$$

Thus, if the maximum nonlinear order is taken to be 2, then the output frequency range of the system is

$$f_{r|n=2} = f_x \cup f_y = [0, 6.2832]$$

If the maximum order is taken to be 3, then the output frequency range

$$f_{r|n=3} = f_x \cup f_y = [0, 9.4248]$$

Clearly, $f_{r|n=3}$ contains the whole selected output frequency range $[c,d]=[0,7.3]$, N is therefore determined to be $N=3$.

(iii) C_n , $n=1,2,3$.

C_n , $n=1,2,3$ are determined to minimize the following expression

$$\sum_{i=1}^3 \left[1 - C_i \left| U(j2\pi/MT) \right| - \frac{1}{2\pi} C_2 \left| U(j2\pi/MT) \right| - \frac{1}{(2\pi)^2} C_3 \left| U(j2\pi/MT) \right| \right]^2$$

under the constraints of $C_i \geq 0$, $i=1,2,3$.

Notice that for this specific example,

$$M = 4000$$

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] = \text{round} \left[\frac{0 \times 4000 \times 0.01}{2\pi} \right] = 0$$

$$i_d = \text{round} \left[\frac{dMT}{2\pi} \right] = \text{round} \left[\frac{7.6 \times 4000 \times 0.01}{2\pi} \right] = 48$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 2.1932, C_3 = 6.0550$$

WO 99/45644

PCT/GB99/00550

(6) Select the NARX model parameters

$K_n, c_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n,$ for
 $n = N_0, \dots, N,$

based on the results obtained in (5) as

5

$$K_1 = K_2 = K_3 = 2$$

$$c_{01}(\cdot) = 0,$$

$$c_{02}(1,1) = 1.1932, c_{02}(1,2) = c_{02}(2,1) = 0, c_{02}(2,2) = -1,$$

$c_{03}(1,1,1) = 3.0550, c_{03}(2,2,2) = -3,$ and other $c_{0n}(\cdot)$'s are zero
 and consequently construct a NARX model as

10

$$\begin{aligned} y(k) &= \sum_{n=N_0}^N \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) + \\ &\quad \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{02}(2,2) u^2(k-2) + c_{03}(1,1,1) u^3(k-1) + c_{03}(2,2,2) u^3(k-2) \\ &= 1.1932 u^2(k-1) - u^2(k-2) + 3.0550 u^3(k-1) - 3 u^3(k-2) \end{aligned}$$

15

Notice that the selected NARX model parameters
 satisfy the relationship

$$\begin{aligned} \sum_{l_1=1}^{K_1} |c_{01}(l_1)| &= 0 = C_1 \\ \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| &= |c_{02}(1,1)| + |c_{02}(2,2)| = |1.1932| + |-1| = 2.1932 = C_2 \\ \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| &= |c_{03}(1,1,1)| + |c_{03}(2,2,2)| = |3.0550| + |-3| = 6.0550 = C_3 \end{aligned}$$

20

and the different signs selected for

$$c_{02}(1,1) \text{ and } c_{02}(2,2)$$

and for

$$c_{03}(1,1,1) \text{ and } c_{03}(2,2,2)$$

25

are such as to give effect to the intra-kernel and
 inter-kernel interferences, which is to attenuate the
 energy of the input signal.

WO 99/45644

PCT/GB99/00550

The frequency domain response of the constructed model to the sampled series of the input signal is shown in figure 27. It can be seen that excellent energy attenuation has been achieved by the designed system. It will be appreciated that the input energy in figure 26 has been spread over the designed frequency band by the nonlinear filter.

Example 3

10

This example shows another application of the present invention to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects. The example also illustrates the effect of the same design on a different input signal to demonstrate the effectiveness in energy attenuation of the designed system in different circumstances.

- (1) Design a nonlinear system to attenuate the energy of the signal

$$u(t) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha t - \sin \beta t}{t}$$

with $\alpha = 3.3$, $\beta = 1$, and $M_u = 1.6$.

- (2) The spectrum of the signal is evaluated by sampling the signal with sampling interval $T = 0.01$ sec to produce

$$u(k) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha kT - \sin \beta kT}{kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and then performing a Fast Fourier Transform (FFT) on the obtained time series. The result of the FFT is the same as that shown in figure 16.

WO 99/45644

PCT/GB99/00550

- (3) Evaluating the range $[a,b]$ of frequencies in the signal based on the computed spectrum gives

$$a=0.6283 \quad b=3.7699$$

as the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [0.6283, 3.7699]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w.$$

- (4) Assume that, as part of the design, it is desired that the output frequency range is $[c,d]=[0,10.3]$ and the required bound over this frequency range is $Y^*(w)=1$.

- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, the parameters N_0 , N , and C_n , $n=N_0, \dots, N$ are determined as follows.

- (i) N_0

N_0 is determined to be $N_0=1$ due to

$$f_x = [a,b] = [0.6283, 3.7699] \subseteq [0, 10.3] = [c, d],$$

which indicates that part of the selected output frequency range falls into the linear output frequency range f_x .

- (ii) N

In this example, N is obtained using $a=0.6283$ and $b=3.7699$. Therefore,

$$f_{x_1} = [0, 7.5398]$$

$$f_{x_2} = [0, 11.3097].$$

Hence, if the maximum nonlinear order is taken to be 2, the output frequency range of the system is

$$f_{x|n=2} = f_{x_1} \cup f_{x_2} = [0, 11.3097].$$

If the maximum order is taken to be 3, the output frequency range

$$f_{x|n=3} = f_{x_1} \cup f_{x_2} = [0, 11.3097].$$

WO 99/45644

PCT/GB99/00550

As $\hat{f}_r|_{n=3}$ contains the whole selected output frequency range $[c,d]=[0,7.6]$, N , for the design, is determined to be $N=3$.

5 (iii) C_n , $n=1,2,3$

C_n , $n=1,2,3$ are determined in such a manner as to minimise

$$\sum_{i=1}^N \left[1 - C_i \left| U(j2\pi i/MT) \right| - \frac{1}{2\pi} C_i \left| U^*(j2\pi i/MT) \right| - \frac{1}{(2\pi)^2} C_i \left| U^* U(j2\pi i/MT) \right| \right]^2$$

10 under the constraints of $C_i \geq 0$, $i=1,2,3$. In this case also $M=4000$ but

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] = \text{round} \left[\frac{0 \times 4000 \times 0.01}{2\pi} \right] = 0$$

$$i_d = \text{round} \left[\frac{dMT}{2\pi} \right] = \text{round} \left[\frac{10.3 \times 4000 \times 0.01}{2\pi} \right] = 66$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 0.2928, C_3 = 0.9763$$

(6) The NARX model parameters

15 $K_n, c_{0n}(l_1, \dots, l_n)$, $l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n$, for $n = N_0, \dots, N$, are selected based on the results obtained in (5) as

$$K_1 = K_2 = K_3 = 2$$

$$c_{02}(\cdot) = 0$$

$$c_{02}(1,1) = 0.1928, c_{02}(1,2) = -0.1, c_{02}(2,1) = 0, c_{02}(2,2) = 0,$$

$$c_{03}(1,1,1) = 0.6763, c_{03}(1,2,2) = -0.3, \text{ and other } c_{03}(\cdot)'s \text{ are zero.}$$

and consequently a NARX model is constructed

$$\begin{aligned} 20 \quad y(k) &= \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) \\ &\approx \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{02}(1,2) u(k-1) u(k-2) + c_{03}(1,1,1) u^3(k-1) \\ &\quad + c_{03}(1,2,2) u(k-1) u^2(k-2) \\ &= 0.1928 u^2(k-1) - 0.1 u(k-1) u(k-2) + 0.6763 u^3(k-1) - 0.3 u(k-1) u^2(k-2) \end{aligned}$$

WO 99/45644

PCT/GB99/00550

The selected NARX model parameters satisfy the relationships

$$\sum_{l_1=1}^{K_1} |c_{01}(l_1)| = 0 = C_1$$

$$\sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| = |c_{02}(1, 1)| + |c_{02}(1, 2)| = |0.1928| + |-0.1| = 0.2928 = C_2$$

$$5 \quad \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| = |c_{03}(1, 1, 1)| + |c_{03}(1, 2, 2)| = |0.6763| + |-0.3| = 0.9763 = C_3$$

and the different signs selected for

$c_{02}(1, 1)$ and $c_{02}(1, 2)$

and for

$c_{03}(1, 1, 1)$ and $c_{03}(1, 2, 2)$

10 are in order to give effect to the intra-kernel and inter-kernel interferences, which is to attenuate the energy of the input signal.

The frequency response of the constructed model to the
15 input signal specified above is shown in figure 28 which indicates that the required energy attenuation has been realised.

The frequency response of the design above to the input
20 signal in example 2 gives the result shown in figure 29. The nonlinear system design above clearly also works for the signal in example 2 in energy attenuation although the model was not specially designed for this signal. This is reasonable since the magnitude of the spectrum of the signal
25 in example 2 is less than the magnitude of the spectrum of the signal in this example over almost all of the input frequency band and over the other frequency bands the magnitudes of the spectra of the two signals are all zero. This illustrates that the above design is effective not only
30 for the input based on which the design is implemented but also for other inputs with magnitude frequency characteristics less than the magnitude of the spectrum of the considered input.

WO 99/45644

PCT/GB99/00550

III. FLOWCHARTS

Referring to figure 30, there is shown a flow chart 3000 depicting the steps of an embodiment of the present invention in which the output spectrum is specified over a given range of output frequencies.

The signal to be processed and the desired frequency response of the non-linear system to be designed are input via steps 3002 to 3006.

At step 3002, a digital input signal $\{u(k)\}$ and its sampling interval T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is given in step 3004. The output frequency range is specified using beginning and end frequencies c and d respectively. The distribution of the energy over the output frequency range $[c,d]$ is requested or specified in step 3006.

20

The frequency characteristics of the input signal are determined at steps 3008 and 3010. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3008. The range of frequency components contained within the input signal is determined from the FFT at step 3010.

Referring to steps 3012 to 3024, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

WO 99/45644

PCT/GB99/00550

Variables n and N_0 are set to one and zero respectively at step 3012. The output frequency components resulting from the n th-order of system nonlinearities are determined at steps 3014 and 3016.

5

A determination is made at step 3018 as to whether or not $N_0=0$, that is to say, whether or not the smallest order of system nonlinearities which makes a contribution to the desired energy transformation has been determined. If N_0 is equal to zero, a determination is made at step 3020 as to whether or not part of the specified output frequency range falls within f_{yn} . If the determination is negative, processing continues at step 3026 at which the value of n is increased by one. However, if the determination is positive, the value of N_0 is set to equal n at step 3022 and processing continues at step 3026.

If N_0 is not equal to zero, then a determination is made at step 3024 as to whether or not the specified output frequency range lies completely within $f_y = f_{yn} \cup f_{yn-1}$. If the determination is positive, processing continues with step 3027. However, if the determination is negative, the value of n is incremented by one at step 3026 and processing continues at step 3014.

25

Steps 3028 to 3034 determine the values of the lags of the nonlinear model for all values of $n = N_0, N_0+1, \dots, N$ and determine the parameters of the nonlinear system to be designed.

30

Step 3036 represents a step for fine tuning of the output or frequency response of the designed non-linear system.

WO 99/45644

PCT/GB99/00550

Steps 3038 and 3040 determine whether or not the resulting frequency response is sufficient to meet the design requirements. If the frequency response of the designed filter is acceptable, the discrete version of the filter is output at step 3042. However, if the designed non-linear system does not have an acceptable frequency response, then step 3044 increments the value of K_n by one for all $n = N_0, N_0+1, \dots, N$ and steps 3030 to 3040 are iteratively repeated.

10

The determination in step 3040 as to whether or not the designed filter is acceptable is made, for example, by calculating the difference between the required output spectrum and the real output spectrum of the designed system over the frequency band $[c,d]$. If the modulus of the difference is below a predeterminable threshold over all the output frequency band $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus of the difference is greater than the threshold at any frequency over $[c,d]$, then the design is refined.

25

Referring to figure 31, there is shown a flow chart 3100 for implementing computer code according to a second embodiment of the present invention.

The signal to be processed and the specification for the desired bound to be imposed upon the output signal frequency characteristics is input at steps 3102 to 3106.

At step 3102, a digitised input signal and its sampling interval T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is specified in step 3104. A bound

59

SUBSTITUTE SHEET (RULE 26)

WO 99/45644

PCT/GB99/00550

$y^B(w)$ for the distribution of the energy over the output frequency band $[c,d]$ is input at step 3106.

The frequency characteristics of the input signal are determined at step 3108 and 3110. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3108. The range of frequency components contained within the input signal is determined from the FFT at step 3110.

10

Referring to steps 3112 to 3124, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

15

Variables n and N_0 are set to one and zero respectively at step 3112. The frequency components resulting from the n th-order of system nonlinearities are determined at steps 3114 and 3116.

20

A determination is made at step 3118 as to whether or not $N_0 = 0$, that is to say, whether or not the smallest order of system nonlinearities which contributes to the desired energy transformation has been determined. If N_0 is equal to zero, a determination is made at step 3120 as to whether or not part of the specified output frequency range falls within f_{yn} . If the determination is negative, processing continues at step 3126 in which the value of n is increased by one. However, if the determination is positive, the value of N_0 is set to equal n at step 3122 and processing continues at step 3126.

WO 99/45644

PCT/GB99/00550

If, at step 3118, it is determined that N_0 is not equal to zero, then a determination is made at step 3124 as to whether or not the specified output frequency range lies completely within $f_y = f_{y_n} \cup f_{y_{n-1}}$. If the determination is
 5 positive, processing continues with step 3127. However, if the determination is negative, the value of n is incremented by one at step 3126 and processing continues at step 3114.

Steps 3128 to 3134 determine the values C_n for all
 10 values of $n = N_0, N_0+1, \dots, N$, which represents the summation of the modulus of the values of the parameters of the nonlinear system.

At step 3136 the parameters of a NARX model are selected given the constraints imposed upon the non-linear
 15 system obtained in steps 3128 to 3134. A determination is made via steps 3138 and 3140 as to whether or not the frequency response beyond the frequency band $[c,d]$ of the designed filter is acceptable. If the frequency response is acceptable, the filter design parameters are output at step
 20 3142. However, if the filter characteristics are not acceptable at frequencies outside the frequency range $[c,d]$, then a conventional filter, $H(q^{-1})$, is designed, at step 3144, in order to reduce or obviate the frequency response of the designed filter outside the range of frequencies
 25 $[c,d]$. Finally, the design is completed at step 3146 by combining the designed non-linear and linear filters, if any.

The determination in step 3140 as to whether or not the
 30 frequency response of the designed filter is acceptable outside the range of frequencies $[c,d]$ is made, for example, by comparing the modulus of the frequency response beyond the frequency range $[c,d]$ with a predeterminable threshold.

WO 99/45644

PCT/GB99/00550

If the modulus is below the threshold over all the frequency range outside $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus is greater than the threshold at any frequency beyond $[c,d]$, the design is refined.

WO 99/45644

PCT/GB99/00550

IV. THREE MORE DESIGNS AND EXAMPLESIV.1 DESIGN OF NONLINEAR FILTERS WITH SPECIFICATIONS FOR BOTH THE MAGNITUDE AND PHASE OF OUTPUT FREQUENCY RESPONSES

5

It will be appreciated that the basic principles of the present invention can be applied to the design of nonlinear filters based on specifications for both the magnitude and phase of output frequency responses. The ability to
10 modulate phase as well as or instead of magnitude is of particular importance in telecommunication applications.

Consider a filtering problem such that given an input spectrum $U(j\omega)$ over a frequency band $[a,b]$ and a desired output spectrum $Y'(j\omega)$ over another frequency band $[c,d]$, a
15 filter is required to be designed so that the output frequency response $Y(j\omega)$ can match the desired spectrum $Y'(j\omega)$ as closely as possible in terms of both magnitude and phase characteristics. The basic principles in Section I can be directly applied to realise the design of such a filter.
20 The procedure to be followed is described below.

First, a nonlinear filter

$$y_1(t) = N[u(t)]$$

is designed using the basic principles described in Steps (i)—(iv) and (v.1) Part 1 in Section I to produce a
25 frequency response $Y_1(j\omega)$ such that $Y_1(j\omega)$ can match $Y'(j\omega)$ over the specified output frequency range $[c,d]$ as closely as possible in terms of both the magnitude and phase.

Secondly, if required, design a linear filter with a frequency response function $H_1(j\omega)$ such that, ideally,

$$30 \quad H_1(j\omega) = \frac{Y'(j\omega)}{Y_1(j\omega)} \quad \omega \in [c,d]$$

WO 99/45644

PCT/GB99/00550

This can be used to improve $Y_1(j\omega)$, the result obtained from the nonlinear design, so that the frequency response of the corresponding output

$$Y_2(j\omega) = H_1(j\omega)Y_1(j\omega)$$

5 provides a better match to the desired spectrum $Y_1^*(j\omega)$.

Thirdly, if required, design a linear phase FIR (Finite Impulse Response) band pass filter $H_2(j\omega)$ with the ideal magnitude frequency characteristic

$$|H_2(j\omega)| = \begin{cases} 1 & \omega \in [c, d] \\ 0 & \text{otherwise} \end{cases}$$

10 and a linear phase over the frequency range. Then construct the designed filter using linear filters $H_1(j\omega)$ and $H_2(j\omega)$ and nonlinear filter $N[u(t)]$ as shown in figure 32 to yield the output frequency response

$$Y(j\omega) = H_2(j\omega)Y_2(j\omega)$$

15 The second and third steps above follow the design principle described in Step (v.1) Part 2 in Section I so as to augment the performance of the nonlinear filter $Y_1(t) = N[u(t)]$ designed in the first step.

Ideally, $Y(j\omega) = H_2(j\omega)Y_2(j\omega)$ implies that

$$20 \quad |Y(j\omega)| = \begin{cases} |H_2(j\omega)| |Y_2(j\omega)| = |Y_2(j\omega)| = |H_1(j\omega)Y_1(j\omega)| = |Y_1^*(j\omega)| & \omega \in [c, d] \\ 0 & \text{otherwise} \end{cases}$$

and

$$\angle Y(j\omega) = \angle H_2(j\omega) + \angle Y_2(j\omega) = k_c \omega + \angle Y^*(j\omega)$$

due to the linear phase characteristic of $H_2(j\omega)$ where k_c is a coefficient which is a function of the order of $H_2(j\omega)$.

25 This indicates that the output frequency response of the designed filter is ideally the same as the desired response over the output frequency range $[c, d]$ except for a linear phase difference between the real and the desired phase response. This is in fact an unavoidable phenomenon if band

WO 99/45644

PCT/GB99/00550

pass filtering such as the effect of $H_2(j\omega)$ is applied for the design. However, this is still an ideal characteristic since a linear phase implies that the filter group delay is constant, the filtered signal is simply delayed for some
 5 time determined by k_c , and the wave shape of the processed signal is preserved, that is, there is no phase distortion in the filter output.

The results of a specific nonlinear filter design obtained using the above procedure and based on
 10 specifications for both the magnitude and phase are shown in figures 33-35.

The given input for this design was produced using a white noise sequence uniformly distributed in $[0,4]$ and band limited within the frequency range $[a,b]=[1,8]$ under a
 15 sampling interval $T_s=0.02$ s. The magnitude of the spectrum of the given input is shown in figure 33.

The desired output spectrum was chosen to be

$$Y^*(j\omega) = \begin{cases} \frac{\exp(-500\omega) + j(600\omega^2)}{1000} & \omega \in [c,d] = [13,16] \\ 0 & \text{otherwise} \end{cases}$$

Figure 33 also shows the comparison between the
 20 magnitude of the output spectrum $Y(j\omega)$ of the designed nonlinear filter and the magnitude of the desired spectrum $Y^*(j\omega)$.

Figure 34 shows the comparison between the phase angle of $Y_1(j\omega)$, the output spectrum before linear phase filtering,
 25 and the phase angle of the desired spectrum $Y^*(j\omega)$.

Figure 35 shows the phase angle of the applied linear phase filter $H_2(j\omega)$.

It can be observed from the above that a nonlinear filter designed using the basic principles of the present
 30 invention can produce an output frequency response which

WO 99/45644

PCT/GB99/00550

Figure 35 shows the phase angle of the applied linear phase filter $H_2(j\omega)$.

It can be observed from the above that a nonlinear filter designed using the basic principles of the present invention can produce an output frequency response which satisfies a design specification in terms of both the magnitude and phase.

The discrete time model description of the designed filter is given below where the nonlinear part of the model is the discrete time model description of the nonlinear filter

$$y_1(t) = N[u(t)]$$

and the linear part of the model is the discrete time model description of the linear filter, the frequency response function of which is

$$H(j\omega) = H_1(j\omega)H_2(j\omega)$$

Nonlinear part of the model:

$$\begin{aligned} y(k) = & + (3.123e+06) u(k-1) + (-2.244e+07) u(k-2) + (6.602e+07) u(k-3) \\ & + (-1.027e+08) u(k-4) + (8.961e+07) u(k-5) + (-4.18e+07) u(k-6) \\ & + (8.176e+06) u(k-7) + (4.239e+09) u(k-1)u(k-1) \\ & + (-1.772e+10) u(k-1)u(k-2) + (5.897e+09) u(k-1)u(k-3) \\ & + (7.213e+09) u(k-1)u(k-4) + (-3.66e+09) u(k-1)u(k-5) \\ & + (-1.869e+08) u(k-1)u(k-6) + (6.736e+07) u(k-1)u(k-7) \\ & + (-6.777e+08) u(k-2)u(k-2) + (8.003e+10) u(k-2)u(k-3) \\ & + (-7.57e+10) u(k-2)u(k-4) + (6.023e+09) u(k-2)u(k-5) \\ & + (8.648e+09) u(k-2)u(k-6) + (-4.365e+08) u(k-2)u(k-7) \\ & + (-8.365e+10) u(k-3)u(k-3) + (2.268e+10) u(k-3)u(k-4) \\ & + (1.005e+11) u(k-3)u(k-5) + (-3.795e+10) u(k-3)u(k-6) \\ & + (-2.516e+09) u(k-3)u(k-7) + (1.054e+11) u(k-4)u(k-4) \\ & + (-1.97e+11) u(k-4)u(k-5) + (1.109e+10) u(k-4)u(k-6) \end{aligned}$$

WO 99/45644

PCT/GB99/00550

$+(1.907e+10) u(k-4)u(k-7) + (2.352e+10) u(k-5)u(k-5)$
 $+(8.173e+10) u(k-5)u(k-6) + (-3.318e+10) u(k-5)u(k-7)$
 $+(-4.218e+10) u(k-6)u(k-6) + (2.042e+10) u(k-6)u(k-7)$
 $+(-1.658e+09) u(k-7)u(k-7)$

5

Linear part of the model:

$y(k)=b(1)u(k)+b(2)u(k-1)+\dots+b(m)u(k-m)-a(1)y(k-1)-\dots-$
 $a(n)y(k-n)$

10 with $n=2$ and $m=303$ where

$[a(1), \dots, a(n)] =$

$-1.86215871605398 \quad 0.95715116734794$

and

$[b(1), \dots, b(m)] =$

15 $1.0e-03 \times$

Columns 1 through 4

$0.00000003328202 \quad 0.00000021432147 \quad 0.00000080368128$
 0.00000227704991

Columns 5 through 8

20 $0.00000537879856 \quad 0.00001113499106 \quad 0.00002079938253$
 0.00003571014847

Columns 9 through 12

$0.00005704570668 \quad 0.00008548478679 \quad 0.00012079738459$
 0.00016141668710

25 Columns 13 through 16

$0.00020406372559 \quad 0.00024351205626 \quad 0.00027258483896$
 0.00028246765302

Columns 17 through 20

$0.00026339508245 \quad 0.00020572744049 \quad 0.00010137844659$

30 -0.00005450964923

Columns 21 through 24

$-0.00026181250429 \quad -0.00051381800480 \quad -0.00079603373996$
 -0.00108568381434

Columns 25 through 28

35 $-0.00135214637123 \quad -0.00155851835832 \quad -0.00166438952001$
 -0.00162976908378

Columns 29 through 32

WO 99/45644

PCT/GB99/00550

-0.00141994747987 -0.00101090816448 -0.00039475153522
0.00041552374840
Columns 33 through 36
0.00138259540242 0.00244344402372 0.00351062196838
5 0.00447655873267
Columns 37 through 40
0.00522101718800 0.00562147075427 0.00556579258464
0.00496627276545
Columns 41 through 44
10 0.00377365278712 0.00198963381599 -0.00032378155160
-0.00303968275897
Columns 45 through 48
-0.00596769040539 -0.00886230677976 -0.01143843394688
-0.01339358387193
15 Columns 49 through 52
-0.01443551408603 -0.01431325012233 -0.01284878916639
-0.00996641286493
Columns 53 through 56
-0.00571602453045 -0.00028726506096 0.00598841256370
20 0.01264965179911
Columns 57 through 60
0.01913182739200 0.02480771068003 0.02903991461588
0.03124135106508
Columns 61 through 64
25 0.03093862246516 0.02783233132424 0.02184786863383
0.01317044094614
Columns 65 through 68
0.00225896524855 -0.01016501602446 -0.02315515892661
-0.03560414378179
30 Columns 69 through 72
-0.04633007891956 -0.05417943987784 -0.05813822823951
-0.05744137376473
Columns 73 through 76
-0.05166958483783 -0.04082303832663 -0.02536256454818
35 -0.00621129546254
Columns 77 through 80
0.01528703636150 0.03745307958913 0.05839584942467
0.07616729599331

WO 99/45644

PCT/GB99/00550

Columns 81 through 84

0.08893537701557 0.09516078483677 0.09376093809767
 0.08424478625381

Columns 85 through 88

5 0.06680350720636 0.04234527006789 0.01246669428018
 -0.02064087852648

Columns 89 through 92

-0.05434613862312 -0.08578337461088 -0.11209316760456
 -0.13067820746590

10 Columns 93 through 96

-0.13945154456062 -0.13705390892471 -0.12301823047738
 -0.09786316009190

Columns 97 through 100

15 -0.06310299056015 -0.02116847625143 0.02475895107438
 0.07098889554710

Columns 101 through 104

0.11362138287669 0.14887942949652 0.17344622849594
 0.18477606135825

Columns 105 through 108

20 0.18134984027062 0.16284982658307 0.13023456167487
 0.08570350882143

Columns 109 through 112

0.03255064587105 -0.02508361142904 -0.08254318260252
 -0.13504269472806

25 Columns 113 through 116

-0.17807650738416 -0.20781448143133 -0.22144885867665
 -0.21746018536730

Columns 117 through 120

-0.19577680884658 -0.15781155123986 -0.10636991902139

30 -0.04543567185132

Columns 121 through 124

0.02014930576277 0.08508414798056 0.14405304899329
 0.19217566873157

Columns 125 through 128

35 0.22542441249983 0.24097171607669 0.23743645368538
 0.21500740460840

Columns 129 through 132

0.17543256598964 0.12187499247761 0.05864768640035

WO 99/45644

PCT/GB99/00550

-0.00914923229050
Columns 133 through 136
-0.07605725937466 -0.13671663683833 -0.18631209098366
-0.22096869885059
5 Columns 137 through 140
-0.23806415895179 -0.23643147511610 -0.21643603250516
-0.17992231311682
Columns 141 through 144
-0.13003701658436 -0.07094606546323 -0.00747191949549
10 0.05531598034943
Columns 145 through 148
0.11252149812387 0.15981666793597 0.19377819943088
0.21213874239435
Columns 149 through 152
15 0.21393429471004 0.19953878954962 0.17058700949905
0.12979660938955
Columns 153 through 156
0.08070832589097 0.02736960335274 -0.02600882989955
-0.07539394440027
20 Columns 157 through 160
-0.11724060322409 -0.14874679880287 -0.16803574024719
-0.17425382855726
Columns 161 through 164
-0.16758132308460 -0.14916007746448 -0.12094944070741
25 -0.08552673296083
Columns 165 through 168
-0.04585223365109 -0.00502017035384 0.03398322634818
0.06849574758055
Columns 169 through 172
30 0.09635411698109 0.11601725927068 0.12663256434628
0.12804494388799
Columns 173 through 176
0.12075316710299 0.10582180562013 0.08475985344594
0.05937858562038
35 Columns 177 through 180
0.03164147930605 0.00351816237707 -0.02314740959980
-0.04674674074459
Columns 181 through 184

WO 99/45644

PCT/GB99/00550

-0.06598945884170 -0.07995651694641 -0.08812411270222
-0.09036059631364
Columns 185 through 188
-0.08690017680683 -0.07829817708583 -0.06537295841595
5 -0.04913952047510
Columns 189 through 192
-0.03073930999045 -0.01137008308799 0.00778109613199
0.02559935810198
Columns 193 through 196
10 0.04109626424759 0.05345544314259 0.06206856688305
0.06656076607150
Columns 197 through 200
0.06680468888031 0.06292254225138 0.05527568217195
0.04444169619049
15 Columns 201 through 204
0.03117946545587 0.01638338990942 0.00102875697948
-0.01388895099522
Columns 205 through 208
-0.02741724189660 -0.03870846951445 -0.04707559699096
20 -0.05203784736309
Columns 209 through 212
-0.05335260858275 -0.05103084289941 -0.04533443158680
-0.03675527219878
Columns 213 through 216
25 -0.02597741626758 -0.01382495500742 -0.00119959263130
0.01098723154804
Columns 217 through 220
0.02188229583806 0.03075319656401 0.03704059636285
0.04039599306472
30 Columns 221 through 224
0.04070212260137 0.03807460516092 0.03284505620907
0.02552746332356
Columns 225 through 228
0.01677103005022 0.00730378144712 -0.00212808430644
35 -0.01081988478115
Columns 229 through 232
-0.01816221252030 -0.02368447649585 -0.02708498340864
-0.02824561802129

WO 99/45644

PCT/GB99/00550

Columns 233 through 236

-0.02723060984541 -0.02427029083261 -0.01973202360355
 -0.01408149907660

Columns 237 through 240

5 -0.00783828203366 -0.00152977531128 0.00435233046871
 0.00938952420923

Columns 241 through 244

0.01326503243370 0.01578162483958 0.01686791315533
 0.01657347478885

10 Columns 245 through 248

0.01505411203293 0.01254934451451 0.00935476560966
 0.00579214028759

Columns 249 through 252

0.00218008037598 -0.00119216975076 -0.00408581800286

15 -0.00632711824010

Columns 253 through 256

-0.00781483560799 -0.00852066157236 -0.00848329376098
 -0.00779740923517

Columns 257 through 260

20 -0.00659902170090 -0.00504908820003 -0.00331691201488
 -0.00156482692685

Columns 261 through 264

0.00006463440339 0.00145824730714 0.00253783620427
 0.00326220436512

25 Columns 265 through 268

0.00362556118310 0.00365304002511 0.00339409451670
 0.00291465798950

Columns 269 through 272

0.00228895177653 0.00159174429109 0.00089171267597
 30 0.00024636506918

Columns 273 through 276

-0.00030123128510 -0.00072387920912 -0.00100998481168
 -0.00116188515783

Columns 277 through 280

35 -0.00119315515203 -0.00112532046764 -0.00098439594641
 -0.00079761965498

Columns 281 through 284

-0.00059067279083 -0.00038557775676 -0.00019936402666

WO 99/45644

PCT/GB99/00550

-0.00004349568836
Columns 285 through 288
0.00007602486265 0.00015801946885 0.00020513691086
0.00022267635728

5 Columns 289 through 292
0.00021739726997 0.00019645030203 0.00016652267489
0.00013324716819
Columns 293 through 296
0.00010088214188 0.00007223559481 0.00004878213424
10 0.00003090906954
Columns 297 through 300
0.00001822614592 0.00000988083116 0.00000483478363
0.00000207399807
Columns 301 through 303
15 0.00000074209218 0.00000020073804 0.00000003164528

TABLE 1

WO 99/45644

PCT/GB99/00550

IV.2 DESIGN OF NONLINEAR FILTERS TO FOCUS ENERGY FROM
DIFFERENT FREQUENCY BANDS INTO A SINGLE FREQUENCY BAND

The above embodiments of the present invention
5 illustrate how the principles underlying the invention can
be used to transfer energy from one frequency or frequency
range to another frequency or frequency range. However, it
will be appreciated that the present invention can equally
well be utilised to focus energy from a given frequency
10 band or given frequency bands into a single, and
preferably, narrower frequency band.

The problem to be addressed in this design is that
given an input spectrum which possesses nonzero magnitude
characteristics over two different frequency bands $[a_1, b_1]$
15 and $[a_2, b_2]$, where $a_1 > b_1$, a filter is required to be designed
to focus energy from the two different input frequency
bands into a single output frequency band $[c, d]$, where
 $c > b_1, d < a_2$, with the spectrum of the filter output over the
output frequency range $[c, d]$ satisfying certain
20 specifications. The specifications to be satisfied can be
specified in terms of magnitude, phase or both.

The only difference of this design compared to the
designs in Section I is that the determination of the
maximum order N of the filter nonlinearities should not
25 only ensure that the specified output frequency band $[c, d]$
is covered by the filter's output frequency range, but also
should ensure that the output energy over $[c, d]$ is derived
from the input frequency range $[a_1, b_1]$ and the input
frequency range $[a_2, b_2]$. Therefore, the principles for this
30 design are exactly the same as those described in Section I
except for step (iii) which should follow the new principle
above.

WO 99/45644

PCT/GB99/00550

Consider an example where a nonlinear filter is to be designed to focus the energy from two different frequency bands [3,4] and [10,11] of an input signal

$$u(t) = 2M_u \left(\frac{1}{2\pi} \frac{\sin 2\pi b_1 t - \sin 2\pi a_1 t}{t} + \frac{1}{2\pi} \frac{\sin 2\pi b_2 t - \sin 2\pi a_2 t}{t} \right)$$

- 5 where $b_1=4, a_1=3, b_2=11, a_2=10, M_u=0.03$, into a single frequency band around frequency $f=7$ with the single output frequency band as small as possible and the output magnitude characteristic at frequency $f=7$ being $3M_u=0.09$.

- 10 It can be shown that when subject to the excitation of an input with the frequency spectrum over two different frequency bands $[a_1, b_1]$ and $[a_2, b_2]$, the output frequency ranges of a nonlinear system contributed by the system's 2nd order nonlinearity is

$$[2a_2, 2b_2], [2a_1, 2b_1], [a_1 + a_2, b_1 + b_2], [0, b_1 - a_1] \cup [0, b_2 - a_2] \text{ and } [a_2 - b_1, b_2 - a_1]$$

- 15 Substituting $b_1=4, a_1=3, b_2=11, a_2=10$ into $a_2 - b_1$ and $b_2 - a_1$ yields

$$[a_2 - b_1, b_2 - a_1] = [6, 8]$$

- Clearly this output frequency range covers frequency $f=7$ and the system output energy over this frequency band is
20 derived from the input frequency range $[a_1, b_1]=[3, 4]$ and the input frequency range $[a_2, b_2]=[10, 11]$. Therefore, the maximum order of system nonlinearities can be taken to be $N=2$ for this specific design.

- Moreover, following the same design principles as
25 described in Section I, a discrete time nonlinear filter under the sampling period $T_s=1/50s$ can be obtained for this specific design. Figure 36 illustrates schematically such a filter.

WO 99/45644

PCT/GB99/00550

Figures 37 and 38 show the input and output frequency spectra of this filter respectively and clearly indicate that the input energy over the two different input frequency bands [3,4] and [10,11] have been, as required, successfully focused into a very small band around frequency $f=7$.

IV.3 DESIGN OF SPATIAL DOMAIN NONLINEAR FILTERS

Although the above embodiments have been described with reference to the design of non-linear time-domain systems, it will be appreciated that the present invention is equally applicable to non-linear spatial-domain systems.

In the one dimensional case, the present invention can be directly applied and the only difference of the one-dimensional spatial domain case over the above time-domain embodiments is that the time-domain variables t and k in the continuous and discrete time filter equations become the continuous and discrete spatial variables X and X_k in the spatial domain filter equations.

Consider a one dimensional spatial domain filtering problem that is the same as the second problem addressed in Section II.1 except that the time variables t and k become the spatial variables X and X_k in the present design.

Figure 39 shows the block diagram of the spatial domain nonlinear filter designed in this case. It can be seen that the spatial-domain filter is exactly the same as that shown in figure 9 which is the block diagram of the corresponding time domain nonlinear filter designed in Section II.1 except that the time variables t , k , T , and s (second) in figure 9 have been changed to the spatial variables X , X_k , ΔX , and m (meter) in figure 39.

Figures 40 and 41 show the effects of spatial domain nonlinear filter. Again, except for the time variables

WO 99/45644

PCT/GB99/00550

being changed to spatial variables, the figures are the same as figures 11 and 13 which are the results of the corresponding time domain nonlinear filter.

The filtering effect in the time domain of the second
5 nonlinear filter designed in Section II.1 indicates an energy transfer from the input frequencies $w_{a1}=1$ and $w_{a2}=2$ to the output frequency $w_{a0}=4$. Figure 40 indicates the same effect but in the spatial domain. In this case, the spatial domain nonlinear filter transfers energy from the input
10 spatial frequencies $w_{s1}=1$ and $w_{s2}=2$ to the output spatial frequency $w_{s0}=4$.

When this one dimensional spatial domain nonlinear filter is applied for one dimensional image processing, where figure 41 represents the intensities over the spatial
15 variable X of the images before and after the processing, the energy transformation effect of the spatial domain nonlinear filter can be further illustrated by figures 42 and 43. Figure 42 shows the one dimensional input image with energy located in spatial frequencies $w_{s1}=1$ and $w_{s2}=2$
20 and figure 43 shows the one dimensional output image with energy located in another spatial frequency $w_{s0}=4$ due to the effect of nonlinear filtering.

Although the present invention has been described
25 above with reference to a one dimensional case in the spatial domain, it will be appreciated that the present invention is not limited thereto. The present invention can equally well be applied to the design and implementation of non-linear systems for realising transfer of energy from
30 first m-dimensional spatial domain frequencies to specified second n-dimensional spatial domain frequencies, where m and n are greater than one.

WO 99/45644

PCT/GB99/00550

It will be appreciated that an application of the transfer of energy from first m-dimensional spatial domain frequencies to specified second n-dimensional spatial domain frequencies would be digital image processing or
5 filtering. In such a case $m=n=2$. The present invention can be designed to produce filters that operate upon digital images. The filters can be designed to perform numerous different functions such as, for example, image compression or filtering to remove noise or vary the colour
10 space of an image.

The phrase "transfer of energy" includes, without limitation, the processing of a first signal, specified in the time domain or spatial domain, to produce second signal having predeterminable characteristics including a
15 specified energy distribution.

Furthermore, it will be appreciated that the terms "frequency range" and "range of frequencies" includes a group of frequencies or frequency group. A group of frequencies comprises a plurality of frequencies spatially
20 distributed within an n-dimensional space or over a subspace.

It will be appreciated by those skilled in the art that the phrase "specified spectrum" relates to the specification of at least one of either the magnitude and
25 phase of a signal or frequency components of a signal and is equally applicable to situations in which only the magnitude is specified and to situations in which both the magnitude and phase are specified.

It will be appreciated that the input and output
30 signals of any or all of the various embodiments of the present invention may be time or spatial domain continuous or discrete input or output signals.

WO 99/45644

PCT/GB99/00550

Referring to figure 44 there is shown a data processing system 4400 upon which embodiments of the present invention, that is to say, the non-linear systems and the methods of design thereof can be implemented or realised. It will also
5 be appreciated that the non-linear systems so designed may be implemented in digital form using the data processing system or other suitable hardware and software. The data processing system 4400 comprises a central processing unit 4402 for processing computer instructions for implementing the design
10 of nonlinear systems, given an input signal and particular output signal requirements. The data processing system also comprises a memory 4404 for storing data to be processed or the results of processing as well as computer program instructions for processing such data, a system bus 4406, an
15 input device 4408, an output device 4410 and a mass storage device, for example, a hard disc drive 4412.

WO 99/45644

PCT/GB99/00550

CLAIMS

1. A method for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method comprising the steps of
- identifying or specifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
- calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of the time or spatial domain description of the generalised non-linear system in order to give effect to the energy transfer.
2. A method as claimed in claim 1, further comprising the step of
- selecting a time or spatial domain description of the generalised non-linear system;
- determining or defining a frequency domain description of the time or spatial domain input for the generalised non-linear system; and

WO 99/45644

PCT/GB99/00550

determining or defining the frequency domain description of the output signal, for example, the output spectrum, of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and the coefficients of the time or spatial domain description of a generalised non-linear system.

3. A method as claimed in either of claims 1 or 2, wherein the frequency domain description of the input signal is $U(j\omega)$, the time or spatial domain description of said generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N Y_n(k) \quad (C1)$$

15 where

$$Y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} C_{p,q}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C2)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

20 the frequency domain description of the output of the generalised non-linear system is given by

$$Y(j\omega) = \sum_{n=1}^{\bar{N}} Y_n(j\omega) \quad (C3)$$

where

$$Y_n(j\omega) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{u_1, \dots, u_n} H_n(j\omega_1, \dots, j\omega_n) \prod_{i=1}^n U(j\omega_i) d\sigma_u \quad (C4)$$

25 \bar{N} is the maximum order of dominant system nonlinearities,

$$\int (\cdot) d\sigma_u$$

WO 99/45644

PCT/GB99/00550

denotes an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the non-linear system.

4. A method as claimed in any preceding claim, further comprising the step of determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.
5. A method as claimed in claim 4, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned}
 & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\
 &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\
 &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\
 &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n)
 \end{aligned}
 \tag{C5}$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_1(jw_1, \dots, jw_i) H_{n-1,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p]
 \tag{C6}$$

WO 99/45644

PCT/GB99/00550

6. A method as claimed in any preceding claim, further comprising the steps of

5 defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

7. A method as claimed in any preceding claim, wherein the relationship between the input and output frequencies
10 or frequency ranges is given by the following

$$f_y = f_x \cup f_{x-1} \quad (C7)$$

where f_x denotes the range of frequencies of the output, and f_{x_k} and $f_{x_{k-1}}$ denote the ranges of frequencies produced by the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$15 \quad f_{x_k} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C8)$$

$n = \bar{N} \quad \text{and} \quad \bar{N}-1$

where $\lceil . \rceil$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

20

and the frequencies of the signal to be processed are in the range $[a, b]$ and given $[a, b]$ and the required output frequency range f_y , the method further comprises the step of determining the smallest \bar{N} from the
25 relationship above for the generalised non-linear

WO 99/45644

PCT/GB99/00550

system which can bring about the specified frequency domain energy transformation.

8. A method as claimed in claim 7, wherein, with \bar{N} having
5 been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, the method further comprises the steps of:

taking N as \bar{N} and determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system
10 output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.

- 15 9. A method as claimed in claim 8, further comprising the steps of

substituting $H_n(jw_1, \dots, jw_n)$ given in (C5) into (C4), and substituting the resultant expression for $Y_n(jw)$ into (C3) to obtain the description for the system output
20 spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised nonlinear system.

- 25 10. A method for realising or manufacturing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second
30 spectrum at a second pre-determinable frequency or range of frequencies, the method comprising the steps of

WO 99/45644

PCT/GB99/00550

(a) designing the non-linear system using the method as claimed in any of claims 1 to 9; and

(b) materially producing the non-linear system so designed or using the non-linear system so designed to modify materially the transfer function of an existing linear or non-linear system.

11. A data processing system for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising
- means for identifying or specifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and
- means for calculating, using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of the time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

12. A system as claimed in claim 11, further comprising

WO 99/45644

PCT/GB99/00550

means for selecting a time or spatial domain description of the generalised non-linear system;

means for determining or defining a frequency domain description of the time or spatial domain input for the generalised non-linear system; and

means for determining or defining the frequency domain description of the output of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and the coefficients of the time or spatial domain description of a generalised non-linear system.

13. A system as claimed in either of claims 11 or 12, wherein the frequency domain description of the input signal is $U(j\omega)$, the time or spatial domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C9)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C10)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, \dots, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

- the frequency domain description of the output of the generalised non-linear system is given by

$$Y(j\omega) = \sum_{n=1}^N Y_n(j\omega) \quad (C11)$$

where

WO 99/45644

PCT/GB99/00550

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1+\dots+w_n=w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C12)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1+\dots+w_n=w} (\cdot) d\sigma_w$$

5 denotes an integration over the nth-dimensional hyper-plane $w_1+\dots+w_n=w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the said non-linear system.

14. A system as claimed in any of claims 11 to 13, further comprising

means for determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.

15

15. A system as claimed in claim 14, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned} & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1+\dots+w_n)l_1] \right\} H_n(jw_1, \dots, jw_n) \\ &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1l_1+\dots+w_nl_n)] \\ &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1}l_{p+1}+\dots+w_nl_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\ &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n) \end{aligned} \quad (C13)$$

where

WO 99/45644

PCT/GB99/00550

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_1(jw_1, \dots, jw_i) H_{n-1,p-1}(jw_{i-1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) t_p] \quad (C14)$$

16. A system as claimed in any of claims 11 to 15, further comprising

means for defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

17. A system as claimed in any of claims 11 to 16, wherein the relationship between the input and output frequencies or frequency ranges is given by the following

$$f_v = f_{v_0} \cup f_{v_{N-1}} \quad (C15)$$

where f_v denotes the range of frequencies of the output, and f_{v_0} and $f_{v_{N-1}}$ denote the ranges of frequencies produced by the N th-order and $(N-1)$ th-order nonlinearities, and

$$f_{v_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C16)$$

$n = \bar{N} \quad \text{and} \quad \bar{N}-1$

where $\lceil . \rceil$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a, b]$ and given $[a, b]$ and the required output

WO 99/45644

PCT/GB99/00550

frequency range f_y , the system further comprises the means for determining the smallest \bar{N} from the relationship above for the said generalised non-linear system which can bring about the specified frequency domain energy transformation.

5

18. A system as claimed in claim 17, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, the system further comprises the means:

10

for taking N as \bar{N} and for determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised non-linear system.

15

19. A system as claimed in claim 18, further comprising means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C13) into (C12), and substituting the resultant expression for $Y_n(jw)$ into (C11) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.

20

25

20. A computer program product for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the said product comprising a computer readable storage medium comprising:

30

WO 99/45644

PCT/GB99/00550

computer program code means for identifying or specifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,

5 computer program code means for specifying the second spectrum of a time or spatial domain output signal to which said energy is to be transferred, and

computer program code means for calculating, using a frequency domain description of the output signal, for
10 example, the output spectrum, expressed in terms of a frequency domain description of the input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised
15 non-linear system in order to give effect to the energy transfer.

21. A computer program product as claimed in claim 20, further comprising

20 computer program code means for selecting a time or spatial domain description of the generalised non-linear system;

computer program code means for determining or defining a frequency domain description of the time or spatial
25 domain input for the generalised non-linear system; and

computer program code means for determining or defining the frequency domain description of the output of the generalised non-linear system expressed in terms of the frequency domain description of said input signal and
30 the coefficients of the time or spatial domain description of a generalised non-linear system.

WO 99/45644

PCT/GB99/00550

22. A computer program product as claimed in either of claims 20 or 21, wherein the frequency domain description of the input signal is $U(jw)$, the time or spatial domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C17)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C18)$$

with

$$10 \quad p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{i=1, i \neq p+q}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^N Y_n(jw) \quad (C19)$$

15 where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1, \dots, w_n=w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C20)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1, \dots, w_n=w} (\cdot) d\sigma_w$$

20 denotes an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the non-linear system.

23. A computer program product as claimed in any of claims
25 20 to 22, further comprising

WO 99/45644

PCT/GB99/00550

computer program code means for determining a mapping between the time or spatial domain description of the generalised nonlinear system and the frequency domain description of the generalised nonlinear system.

5

24. A computer program product as claimed in claim 23, wherein the mapping from the time or spatial domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned}
 & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\
 &= \sum_{l_1, l_n=1}^{K_1} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\
 &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{n+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\
 &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_n} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n)
 \end{aligned}
 \tag{C21}$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p-1} H_i(jw_1, \dots, jw_i) H_{n-1,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p]
 \tag{C22}$$

15

25. A computer program product as claimed in any of claims 20 to 24, further comprising

computer program code means for defining or determining a general relationship between the input and output frequency or frequency ranges of the generalised non-linear system.

20

26. A computer program product as claimed in any of claims 20 to 25, wherein the relationship between the input

WO 99/45644

PCT/GB99/00550

and output frequencies or frequency ranges is given by the following

$$f_y = f_{x_n} \cup f_{x_{n-1}} \quad (C23)$$

where f_y denotes the range of frequencies of the output, and
 f_{x_n} and $f_{x_{n-1}}$ denotes the ranges of frequencies produced by
the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$f_{x_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C24)$$

$n = \bar{N} \quad \text{and} \quad \bar{N}-1$

where $\lceil . \rceil$ relates to or means take the integer part,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the
range $[a, b]$, given $[a, b]$ and the required output frequency
range f_y , the computer program product further comprises
computer program code means for determining the smallest \bar{N}
from the relationship above for the said generalised non-
linear system which can bring about the specified frequency
domain energy transformation.

20

27. A computer program product as claimed in claim 26,
wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$,
being given a priori, said product further comprises
computer program code means for taking N as \bar{N} and
determining the coefficients of the time or spatial
domain model of the generalised non-linear system from

25

07-03-2000

HEN 02
137

From: DIBB LUPTON

EP 99938022 G and PC

9/00550

312~

+49 89 239

T-750 P.03/07

CLMS

taking N as \bar{N} and determining the coefficients of the time or spatial domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time or spatial domain model of the said generalised non-linear system.

28. A computer program product as claimed in any of claims 20 to 27, further comprising computer program code means for substituting $H_n(j\omega_1, \dots, j\omega_n)$ given in (C21) into (C20), and substituting the resultant expression for $Y_n(j\omega)$ into (C19) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time or spatial domain model of the generalised nonlinear system.
29. A non-linear system which can transfer energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising
- means for identifying the first spectrum of the time or spatial domain input signal from which energy is to be transferred,
- means for specifying the second spectrum of the time or spatial domain output signal to which said energy is to be transferred, and

07-03-2000

EN 02

From:0189 LUPTON

P99930022 3 and P6176399/00560

112-

+49 89 2390

T-750 P.04/07

CLMS

means for giving effect to the energy transfer using coefficients of a time or spatial domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output signal, for example, the output spectrum, expressed in terms of a frequency domain description of said input signal and coefficients of a time or spatial domain description of a generalised non-linear system.

10

30. A non-linear system to transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising means for implementing a method as claimed in any of claims 1 to 9.

20

31. A non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said non-linear system comprising a data processing system as claimed in any of claims 11 to 19.

25

32. An article of manufacture comprising a computer usable medium with computer readable program code means embodied in the medium for designing a non-linear system for transferring energy from a time or spatial domain input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to a

35

07-03-2000

HEN 02

From:DIBB LUPTON

EP-9938022-5 and PC1A

000550

312-

+40 89 2396

T-750 P.05/07

CEMS

time or spatial domain output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the computer readable program code means in said article comprising:

5 computer readable program code means for identifying the first spectrum of a time or spatial domain input signal from which energy is to be transferred,

10 computer readable program code means for specifying the second spectrum of a time or spatial domain output signal to which said energy is to be transferred, and

15 computer readable program code means for calculating, using a frequency domain description of the output signal, for example, the output spectrum, expressed in terms of a frequency domain description of the input and coefficients of a time or spatial domain description of a generalised non-linear system, the coefficients of a time or spatial domain description of said generalised non-linear system in order to give effect to the energy transfer.

NONLINEAR SYSTEM, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT

ABSTRACT OF THE DISCLOSURE

The present invention relates to nonlinear systems and methods of design thereof in the frequency domain. Typically, conventional linear filter design involves attenuating signals at frequencies which are not of interest and dissipating the energy at those frequencies as, for example, heat or sound. However, in most systems, it is not always convenient to design a linear system or design a system solely with energy attenuation in mind. Therefore, the present invention provides a nonlinear system and method of design thereof in the frequency domain which can be used to transfer energy at a first pre-determinable frequency, or frequency range, to a second pre-determinable frequency, or frequency range. Using the method of the present invention a nonlinear system can be developed which can meet given energy transfer requirements or a nonlinear system can be designed which can alter the transfer function of an existing nonlinear or linear system.

09/623281

WO 99/45644

PCT/GB99/00550

1/38

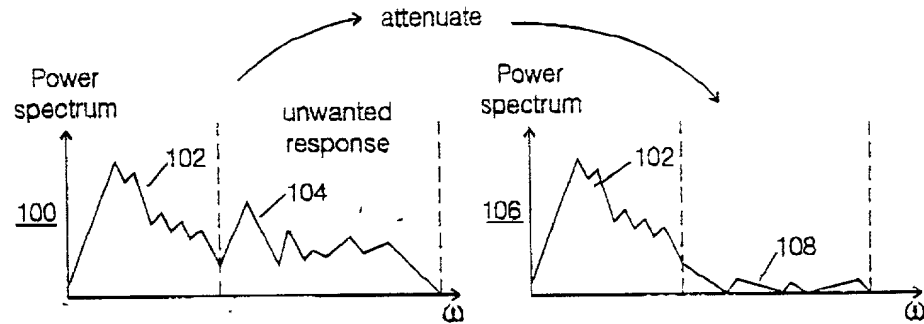


Fig. 1

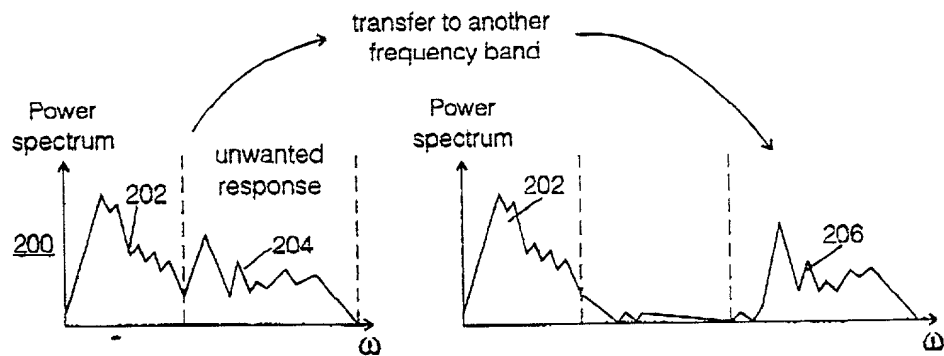


Fig. 2

09/623281

WO 99/45644

PCT/GB99/00550

2/38

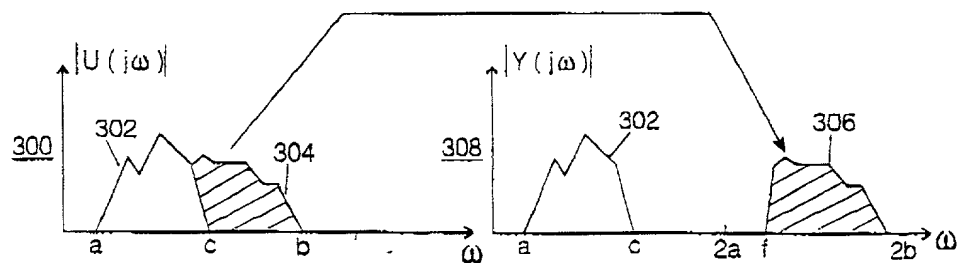


Fig. 3

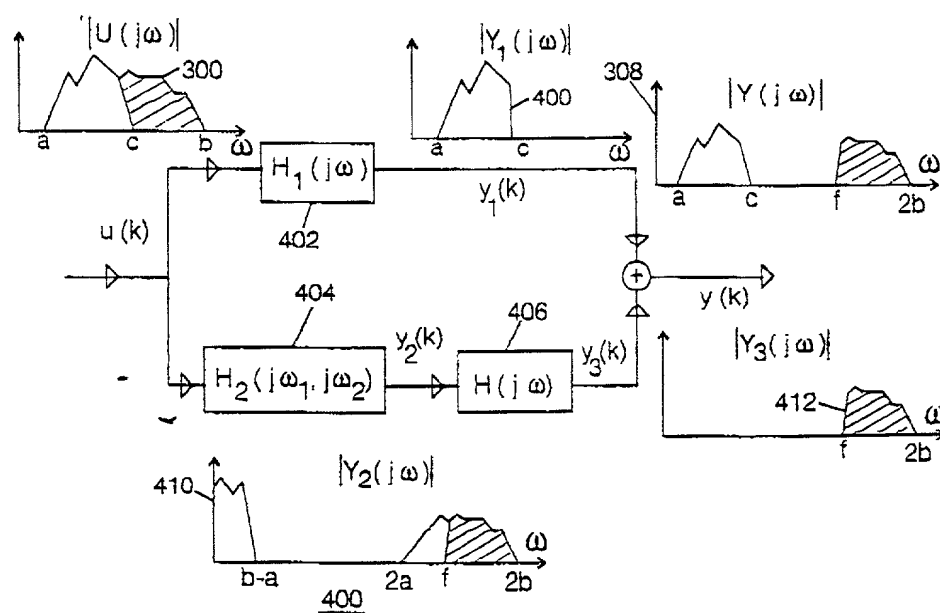


Fig. 4

09/623281

WO 99/45644

PCT/GB99/00550

3/38

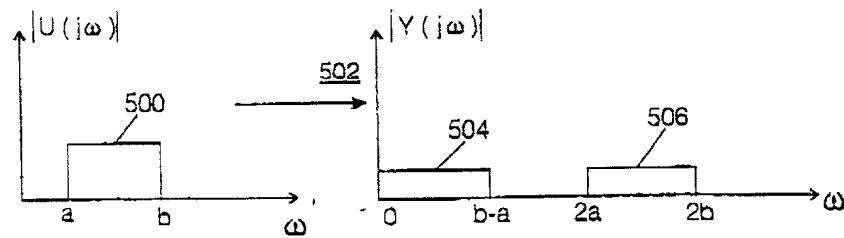


Fig. 5

09/623281

PCT/GB99/00550

WO 99/45644

4/38

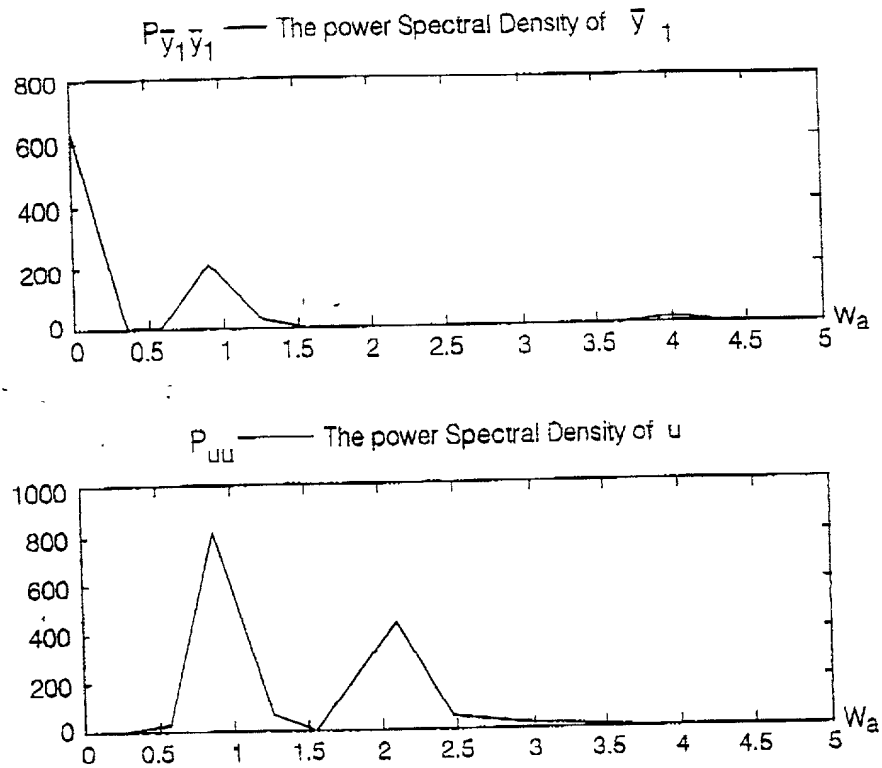


Fig. 6

09/623281

WO 99/45644

PCT/GB99/00550

5/38

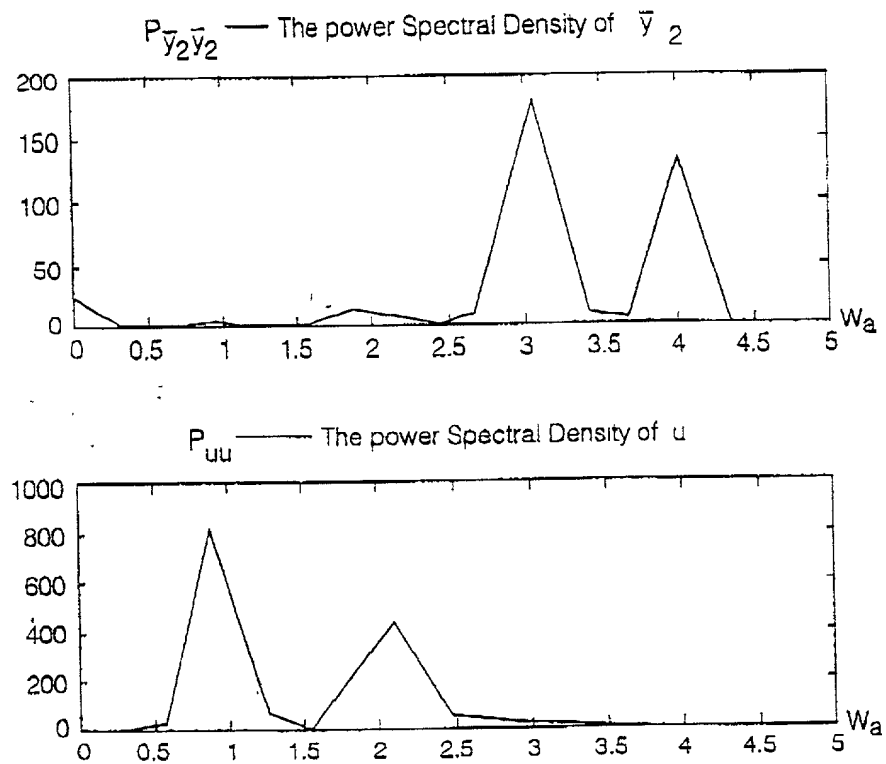


Fig. 7

09/623281

WO 99/45644

PCT/GB99/00550

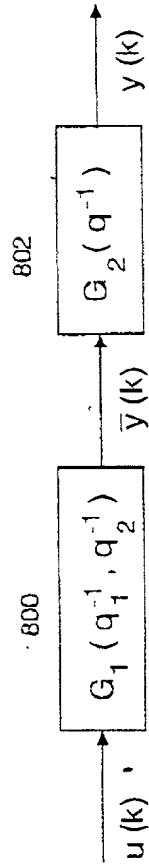


Fig. 8

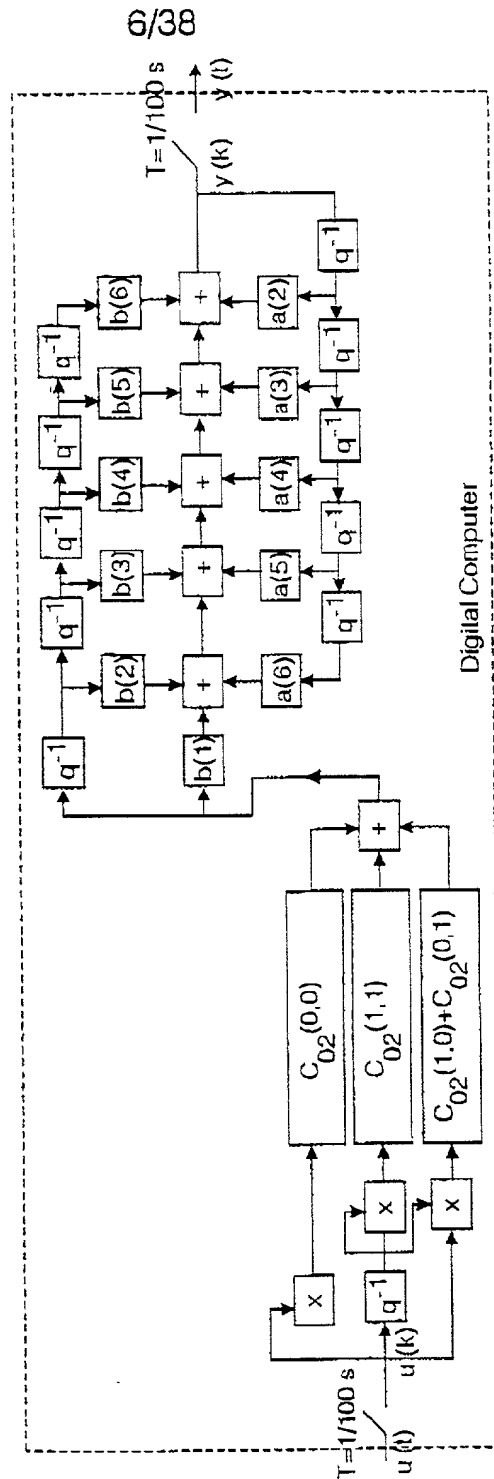


Fig. 9

09/623281

WO 99/45644

PCT/GB99/00550

7/38

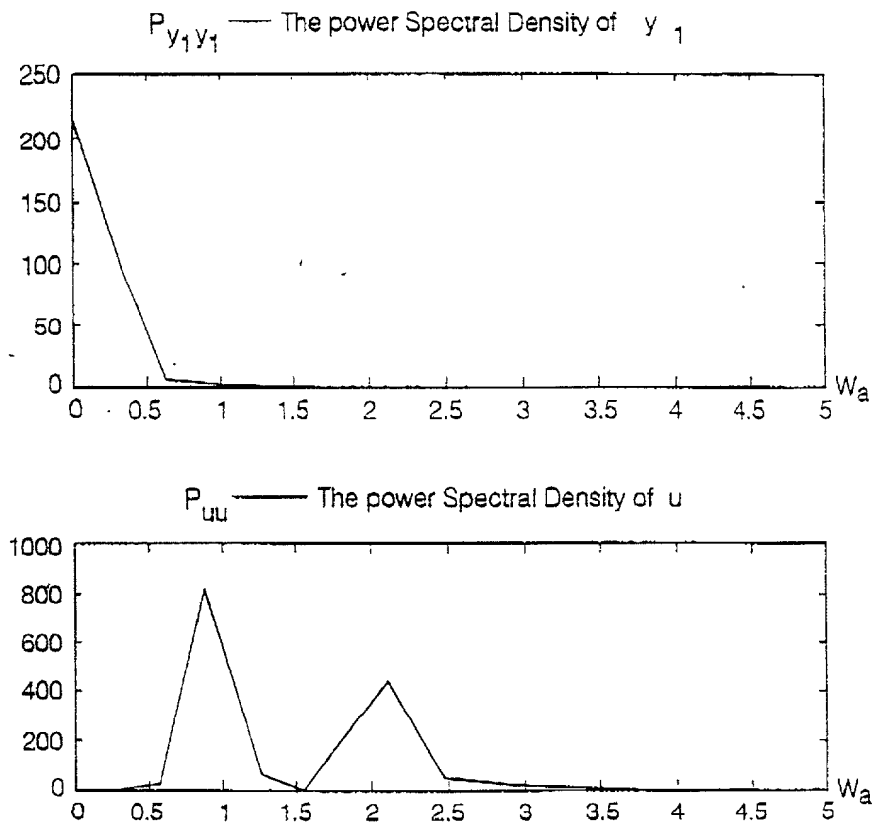


Fig. 10

09/623281

WO 99/45644

PCT/GB99/00550

8/38

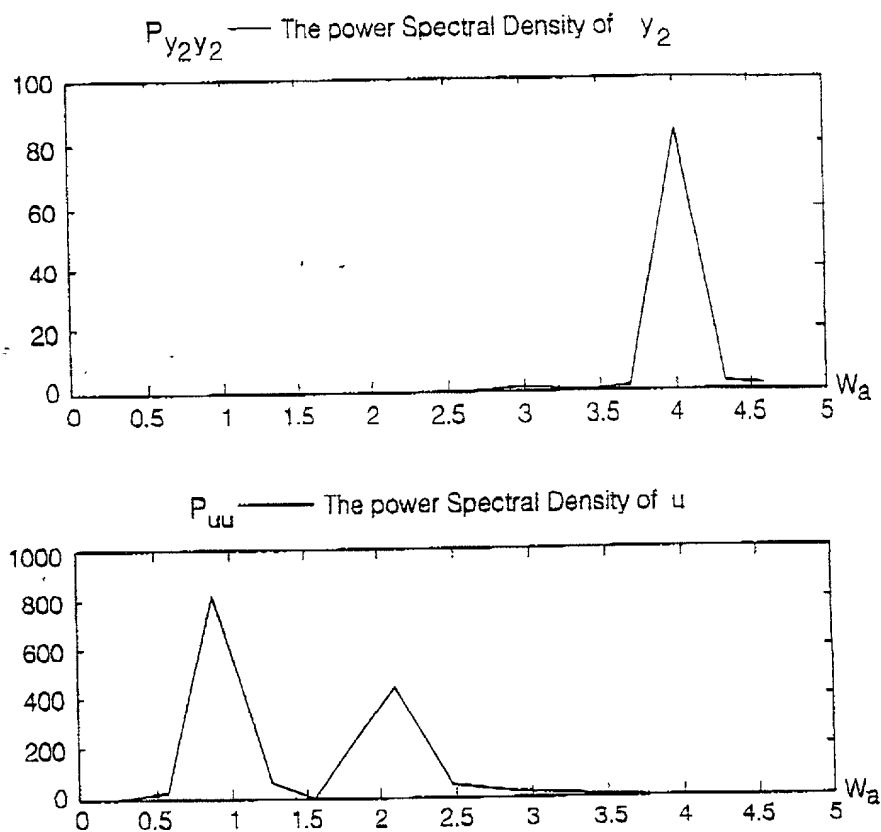


Fig. 11

09/623281

WO 99/45644

PCT/GB99/00550

9/38

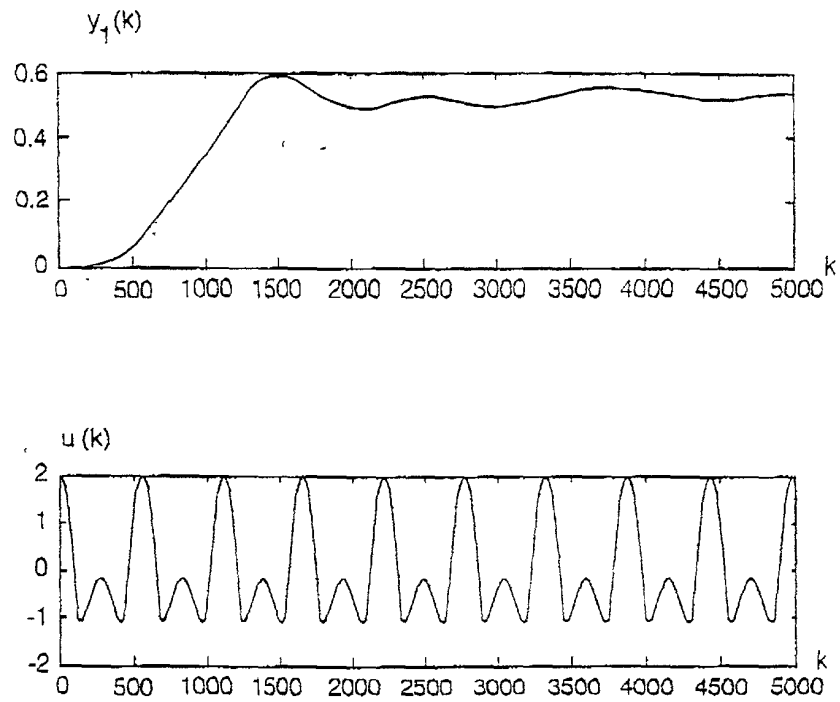


Fig. 12

09/62328T

WO 99/45644

PCT/GB99/00550

10/38

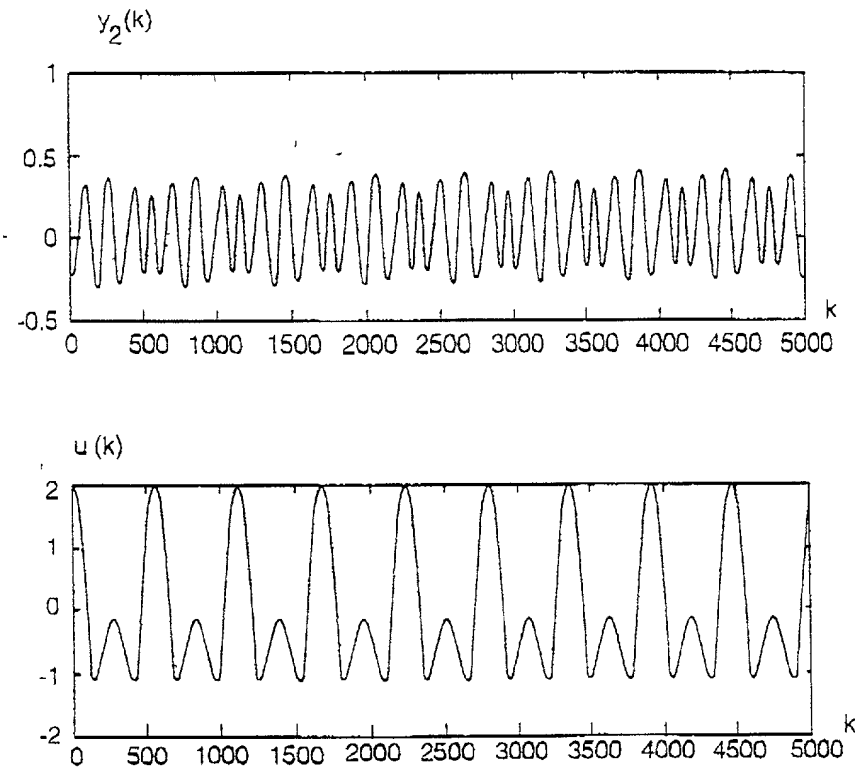


Fig. 13

09/623281

PCT/GB99/00550

WO 99/45644

11/38

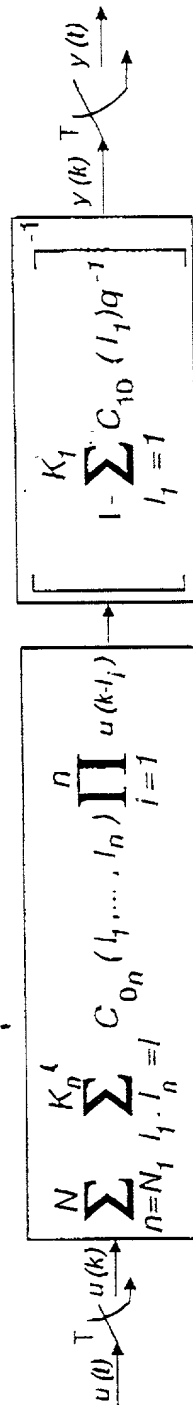


Fig. 14

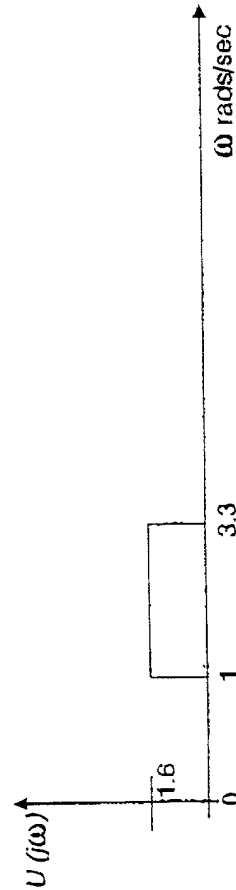


Fig. 15

09/623281

WO 99/45644

PCT/GB99/00550

12/38

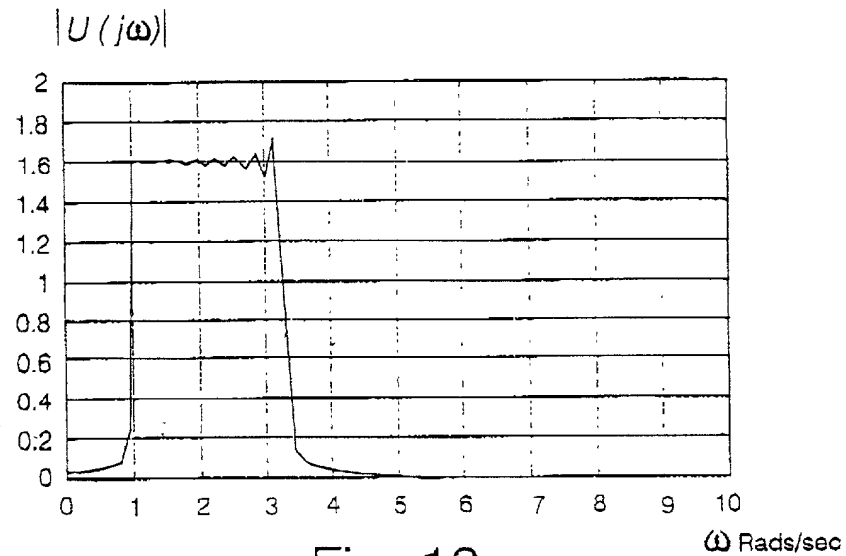


Fig. 16

$$\underbrace{|U| * \dots * |U(j\omega)|}_R \quad \text{for } n = 2 \text{ and } 3$$

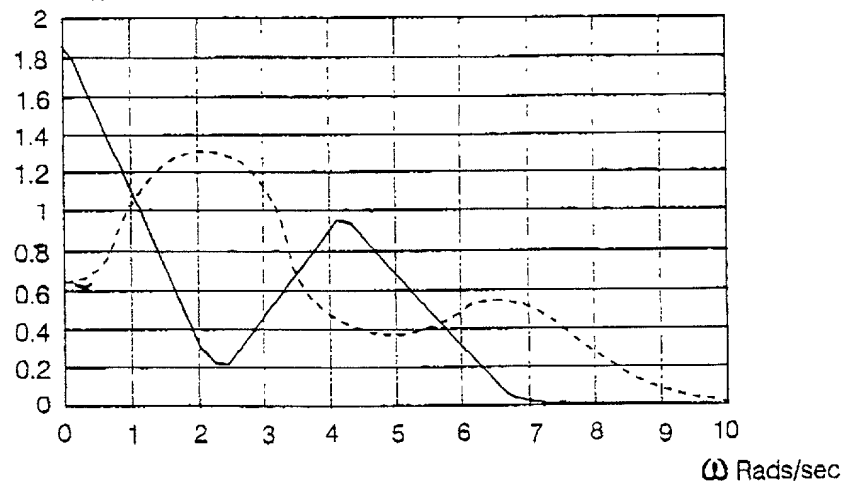


Fig. 17

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

13/38

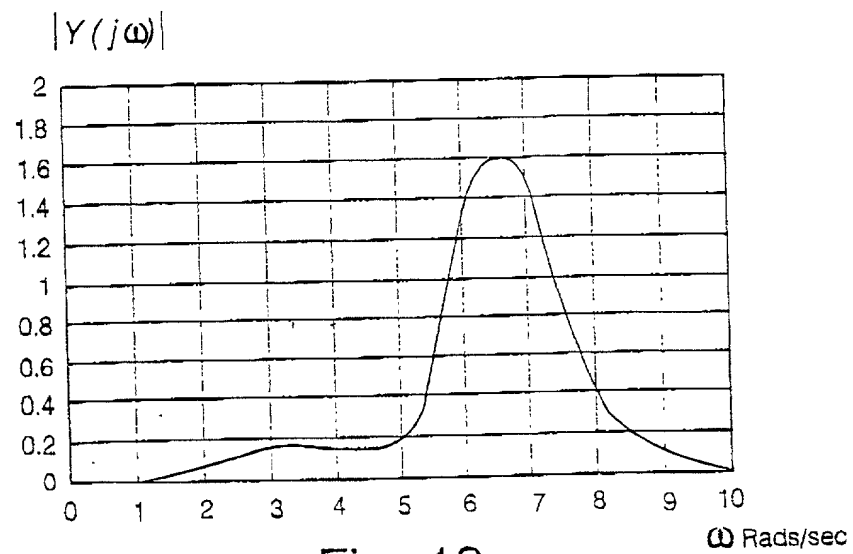


Fig. 18

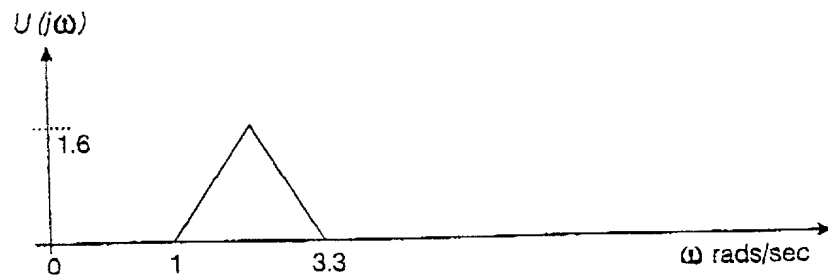


Fig. 19

09/623281

WO 99/45644

PCT/GB99/00550

14/38

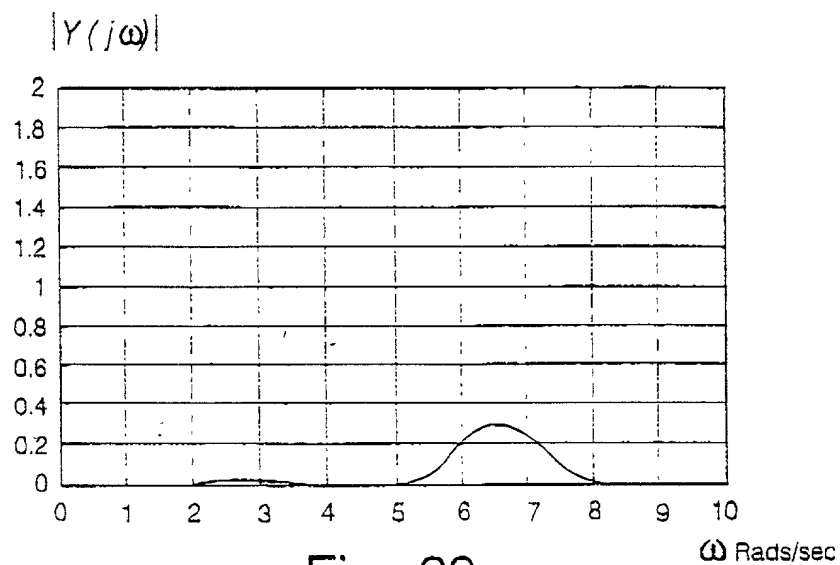


Fig. 20

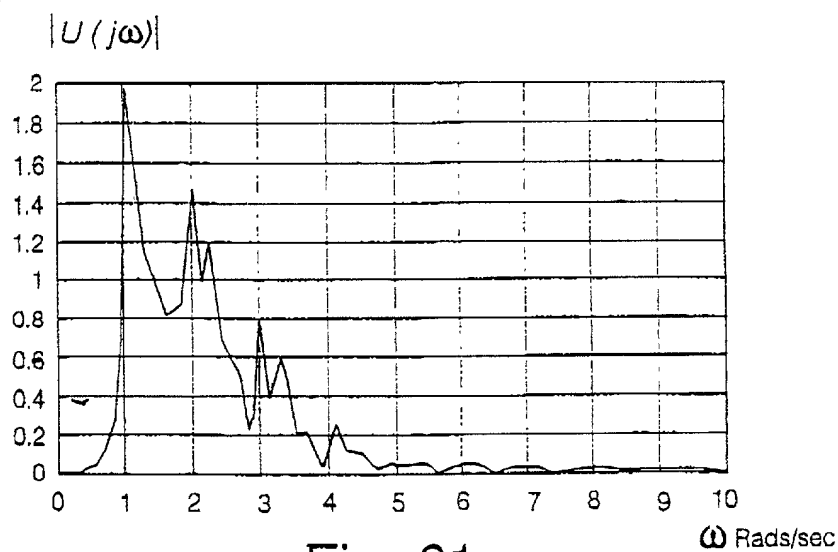


Fig. 21

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

15/38

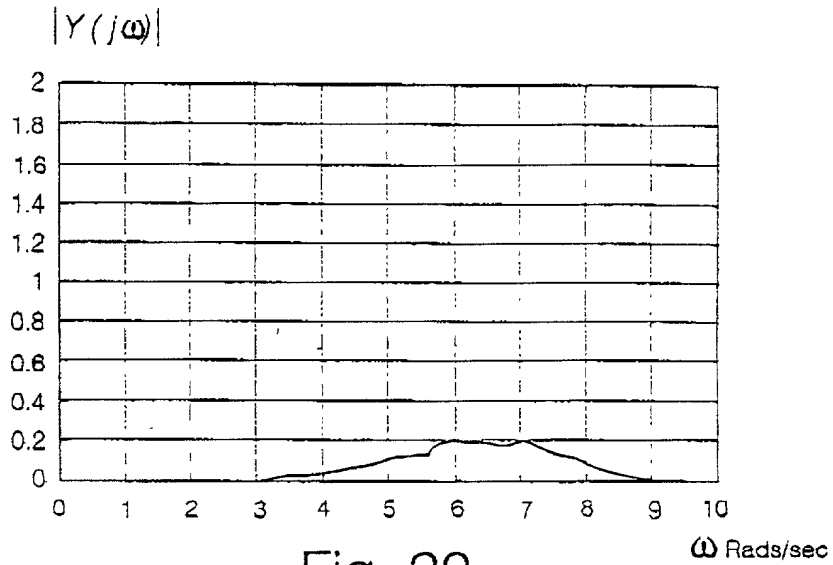


Fig. 22




Fig. 23




Fig. 24

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

16/38

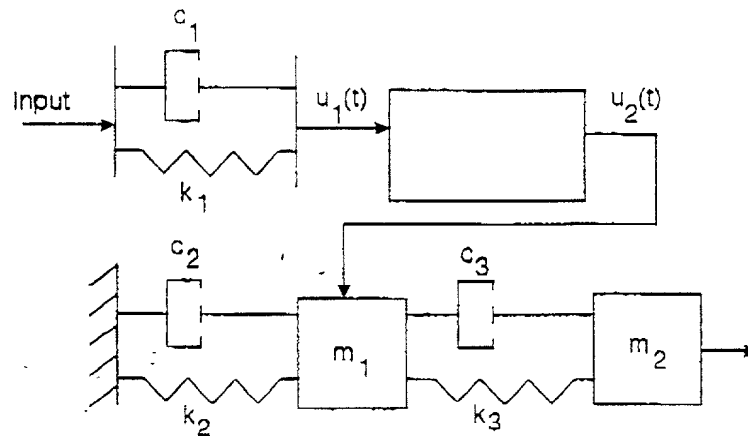


Fig. 25

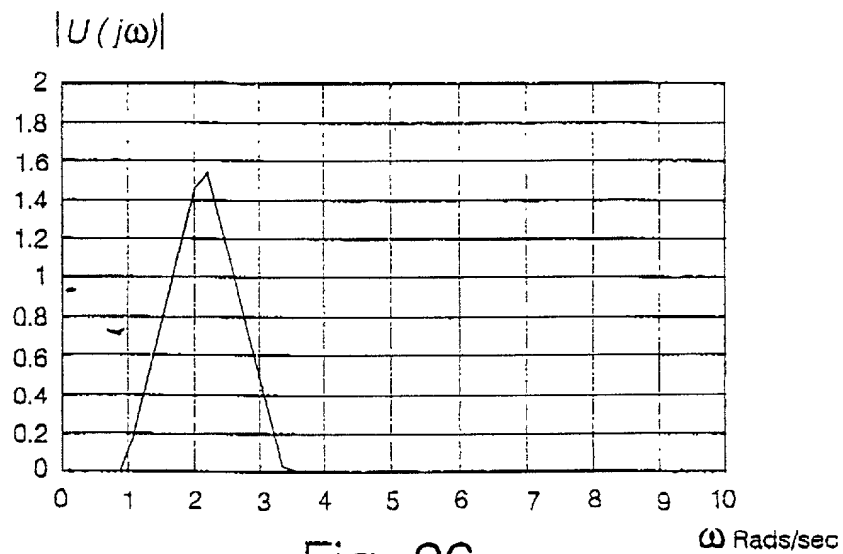


Fig. 26

SUBSTITUTE SHEET (RULE 26)

09/62328T

WO 99/45644

PCT/GB99/00550

17/38

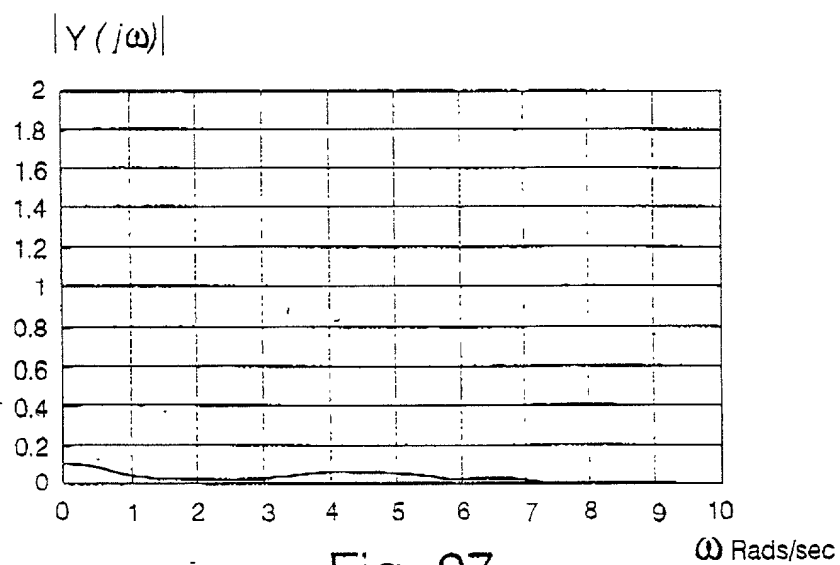


Fig. 27

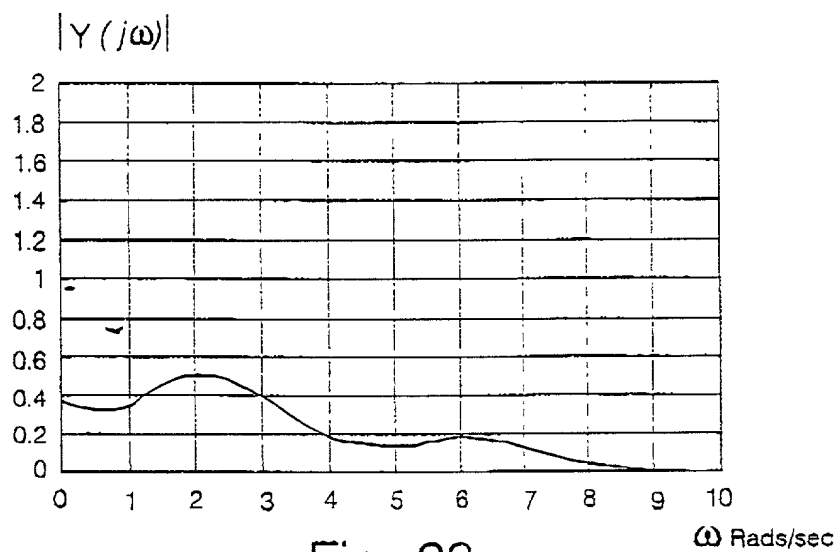


Fig. 28


SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

18/38

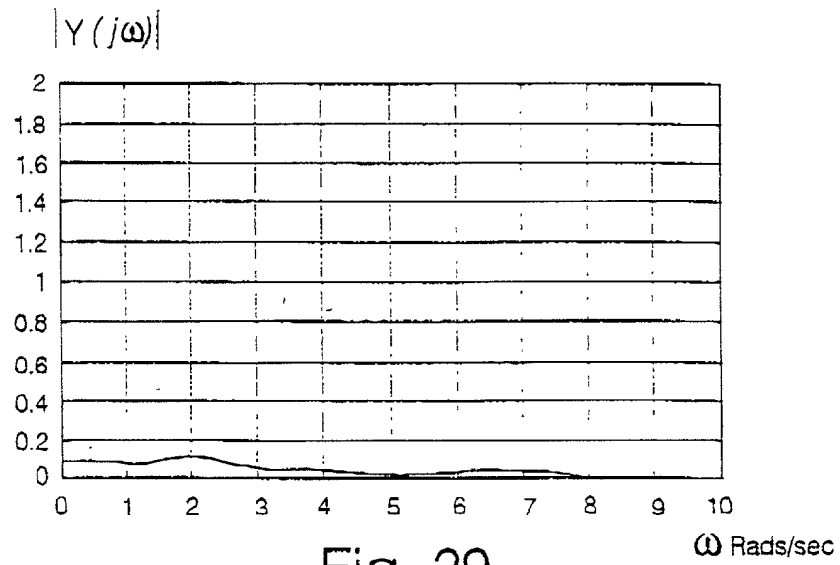

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

19/38


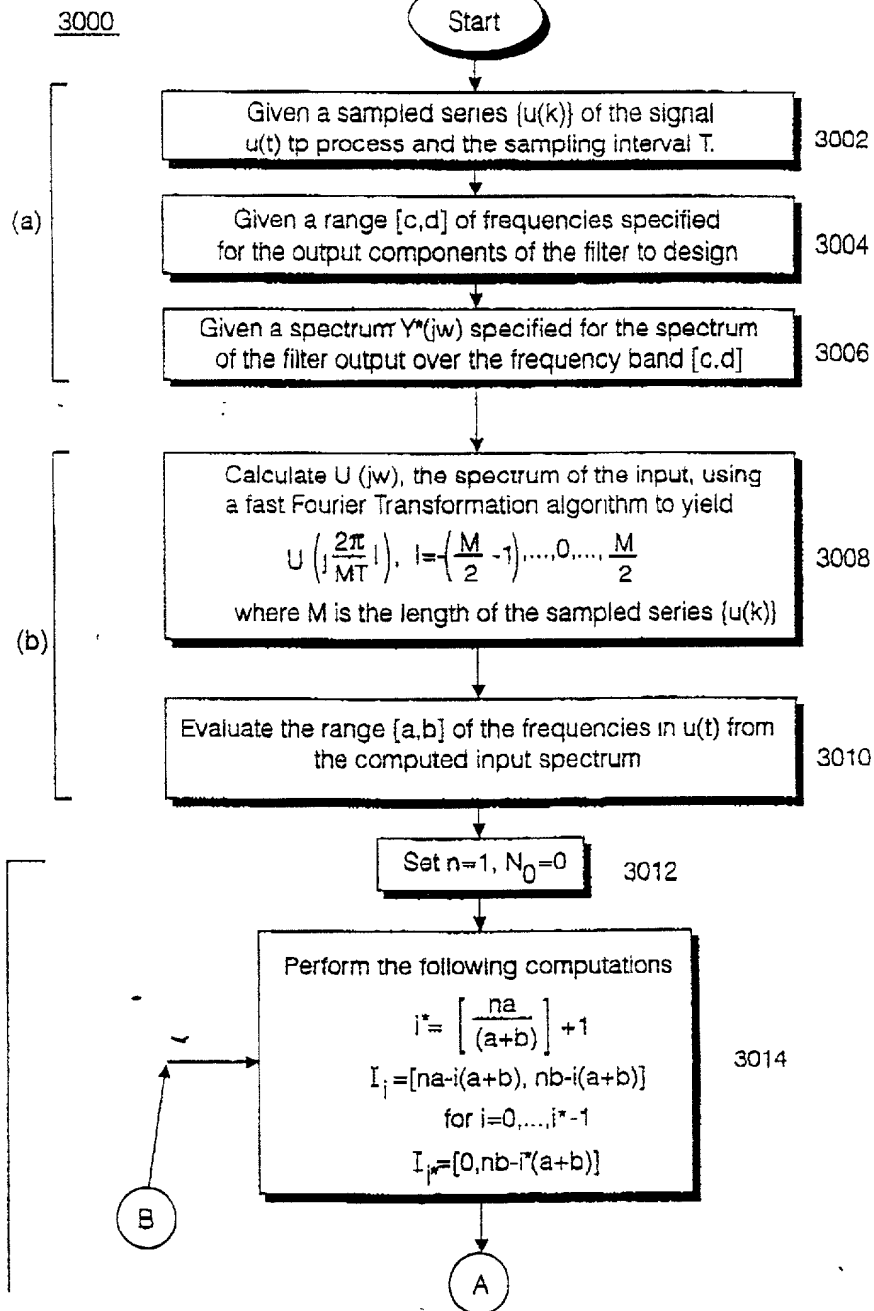


Fig. 30

09/623281

WO 99/45644

PCT/GB99/00550

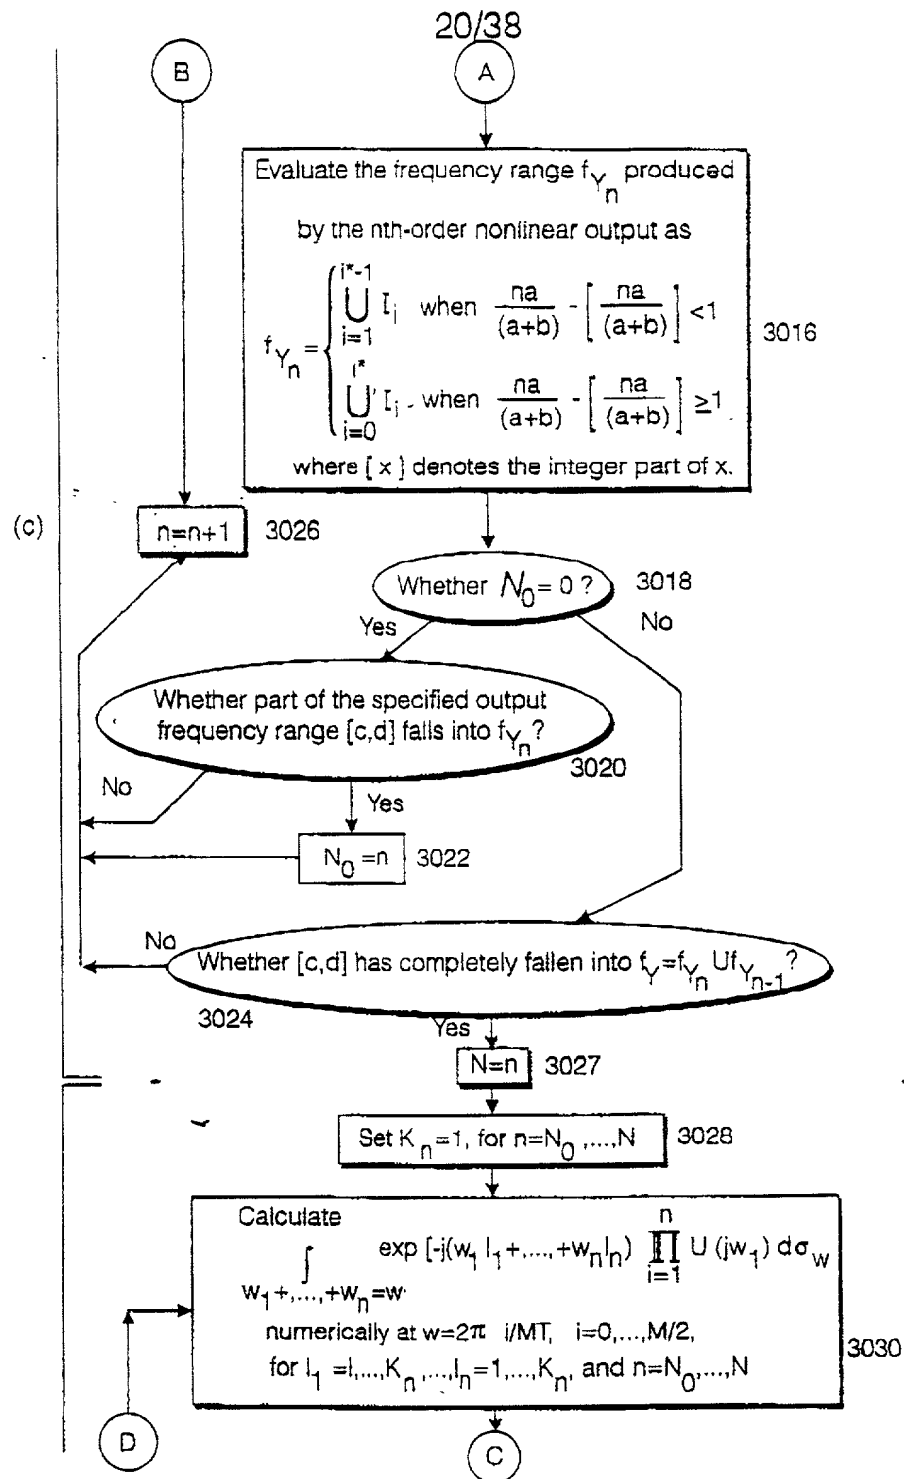


SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

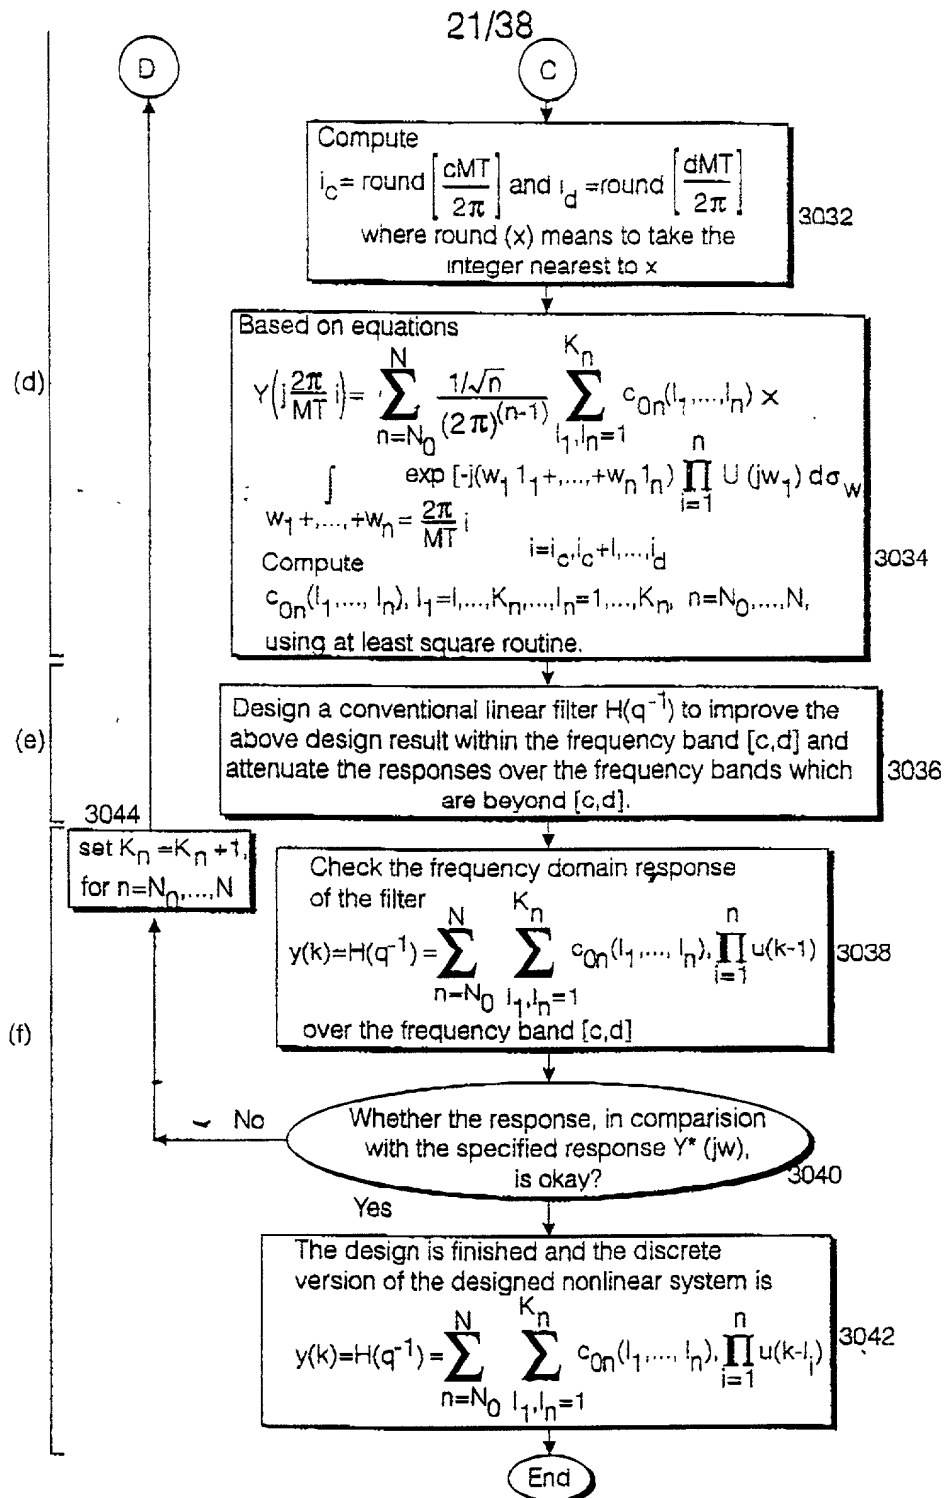

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

22/38

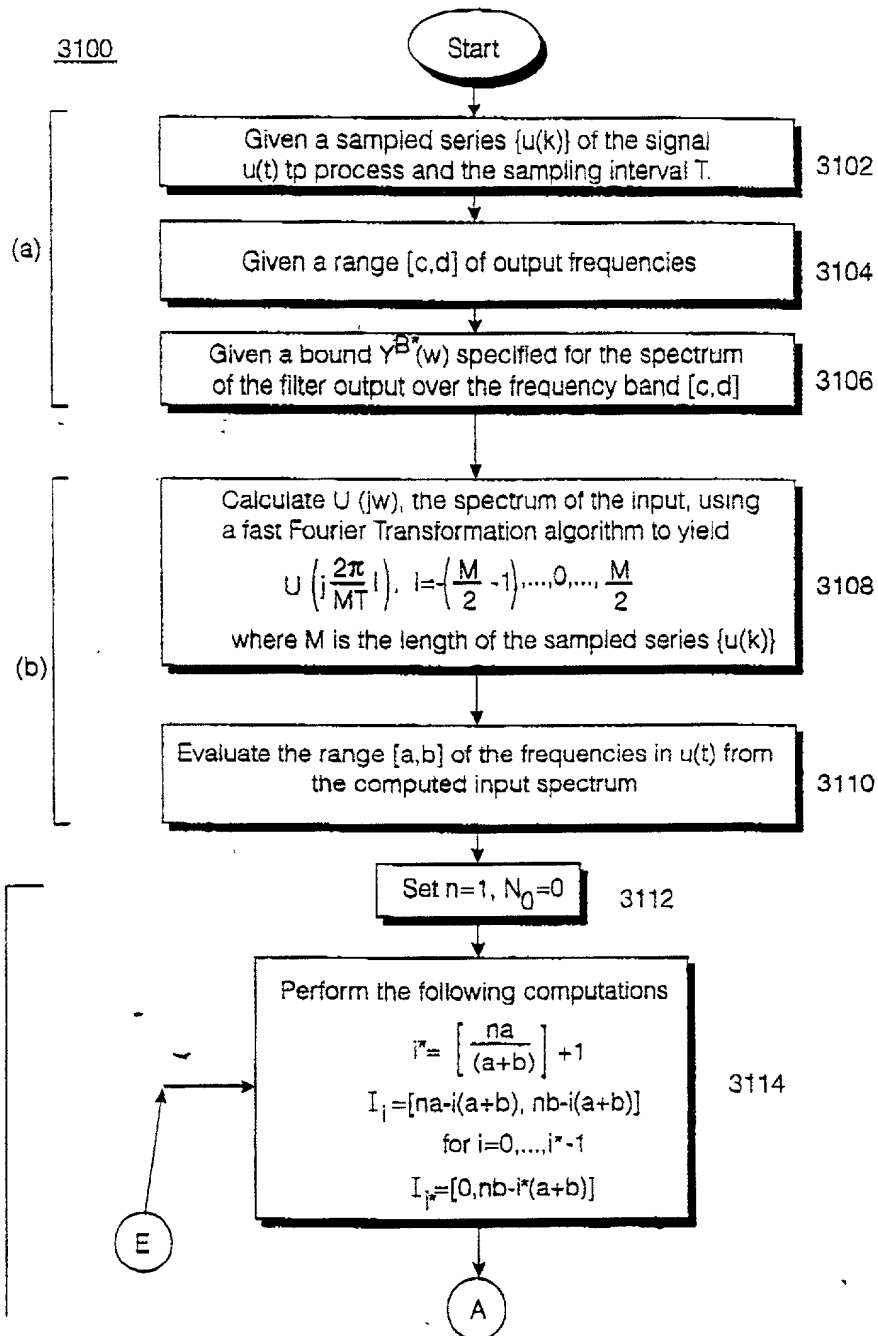



Fig. 31

SUBSTITUTE SHEET (RULE 26)

09/62328T

WO 99/45644

PCT/GB99/00550

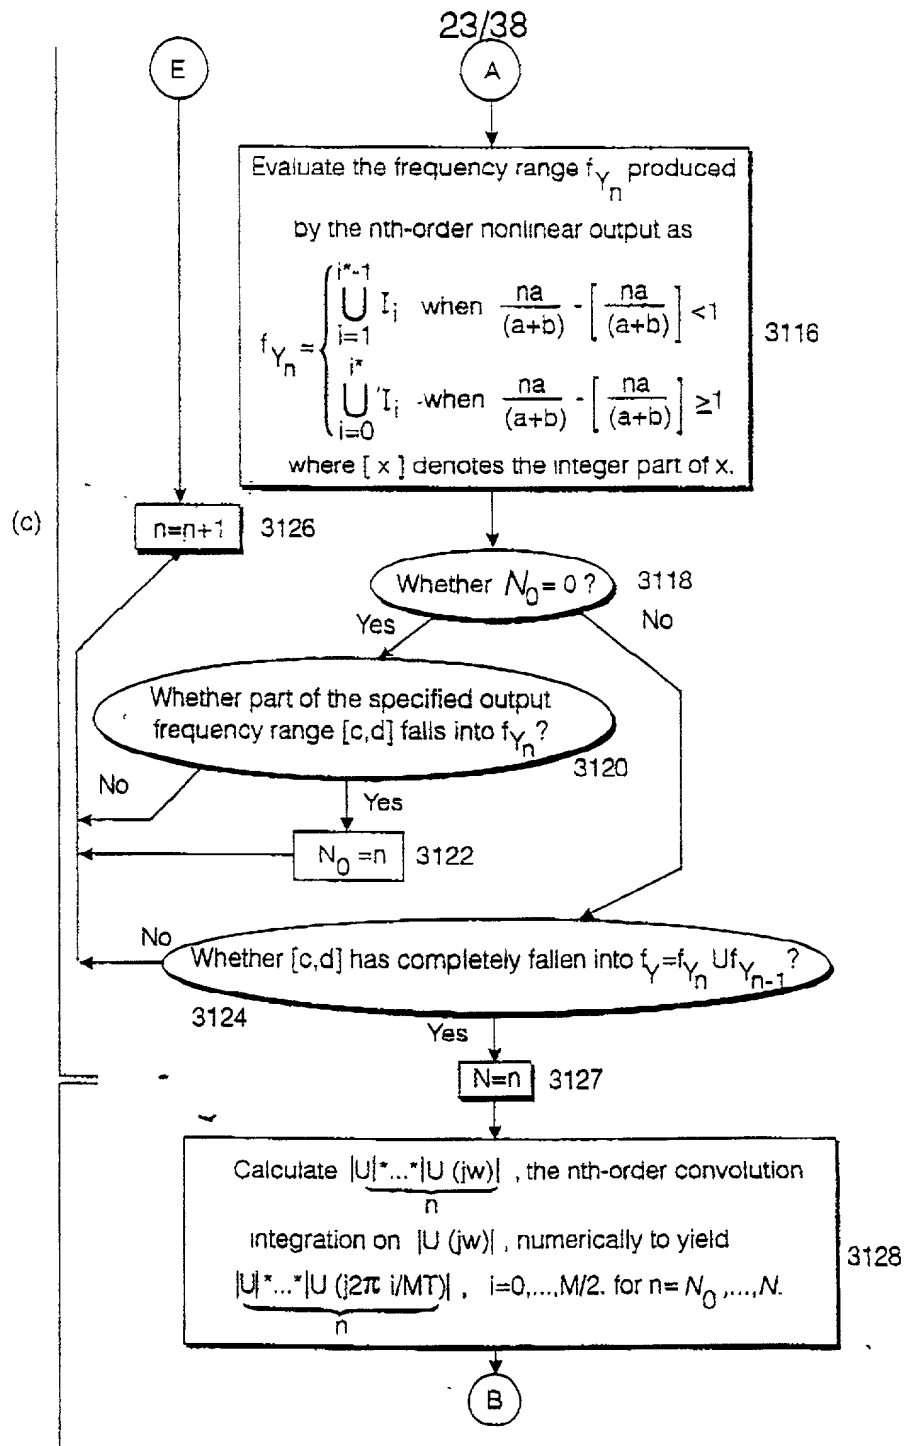

09/623281

WO 99/45644

PCT/GB99/00550

24/38

B

Compute

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] \text{ and } i_d = \text{round} \left[\frac{dMT}{2\pi} \right]$$

where round(x) means to take the integer nearest to x

3132

Based on equations

$$Y^{B*} \left(j \frac{2\pi}{MT} i \right) = \sum_{n=N_0}^N \frac{1}{(2\pi)^{(a-1)}} c_n \underbrace{|U| * \dots * |U|}_{n} \left[j \left(\frac{2\pi}{MT} i \right) \right]$$

$$i = i_c + i_c + 1, \dots, i_d$$

Compute

$$C_n, n = N_0, \dots, N.$$

3134

using at least squares routine under the constraint that the results must be positive

Select NARX model parameters

K_n $c_{0n}(l_1, \dots, l_n)$, $l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n$,
for $n = N_0, \dots, N$, under the constraints

3136

$$C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |C_{0n}(l_1, \dots, l_n)| \quad n = N_0, \dots, N$$

and other constraints specified by specific design problems

Check the frequency domain response of the filter

$$y(k) = H(q^{-1}) = \sum_{n=N_0}^N \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

3138

over the frequency bands beyond [c,d], which should, ideally, be negligible

Whether the frequency response beyond the band [c,d] is ok?

3140

C

D


SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

25/38

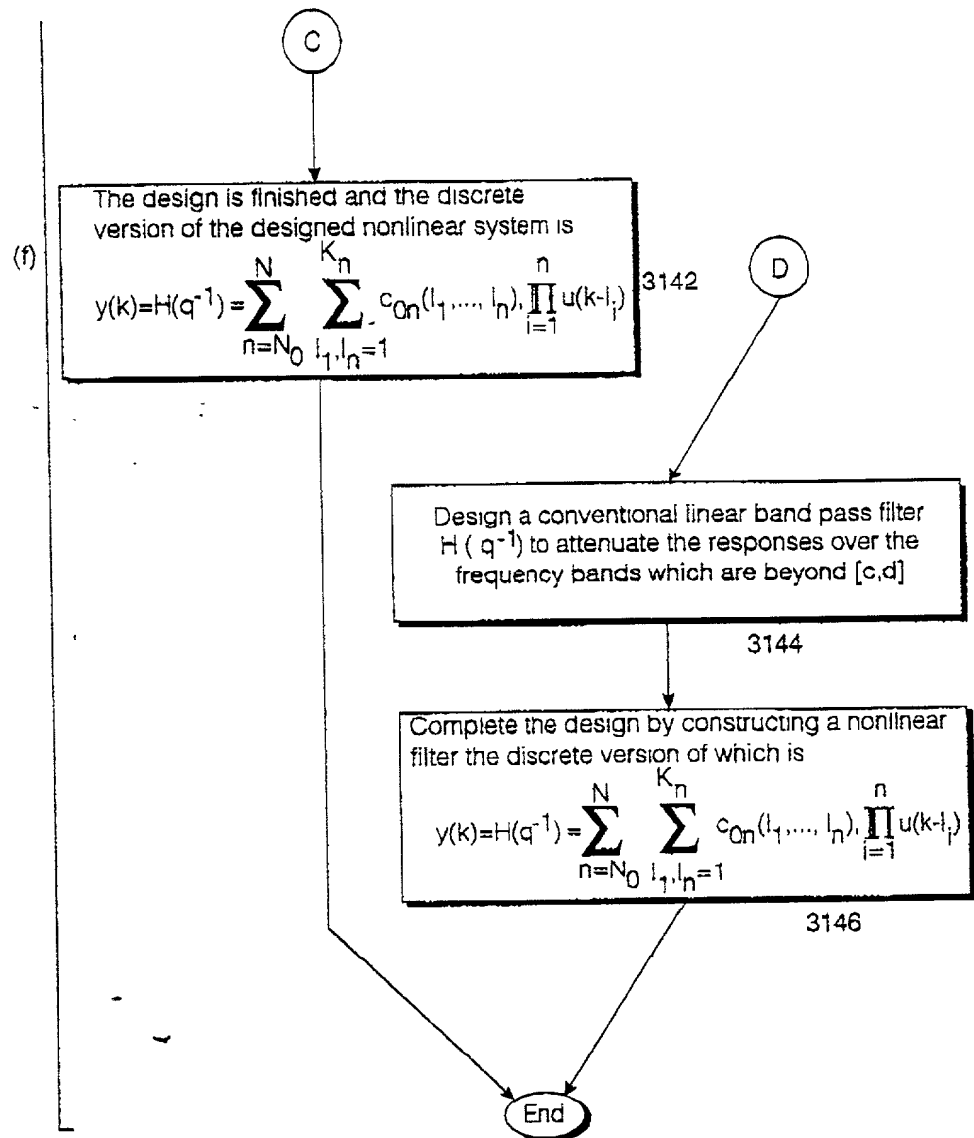

09/623281

WO 99/45644

PCT/GB99/00550

26/38

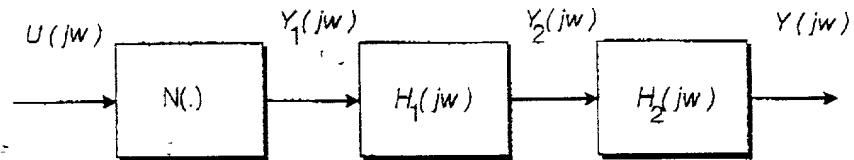



Fig. 32

09/623281

WO 99/45644

PCT/GB99/00550

27/38

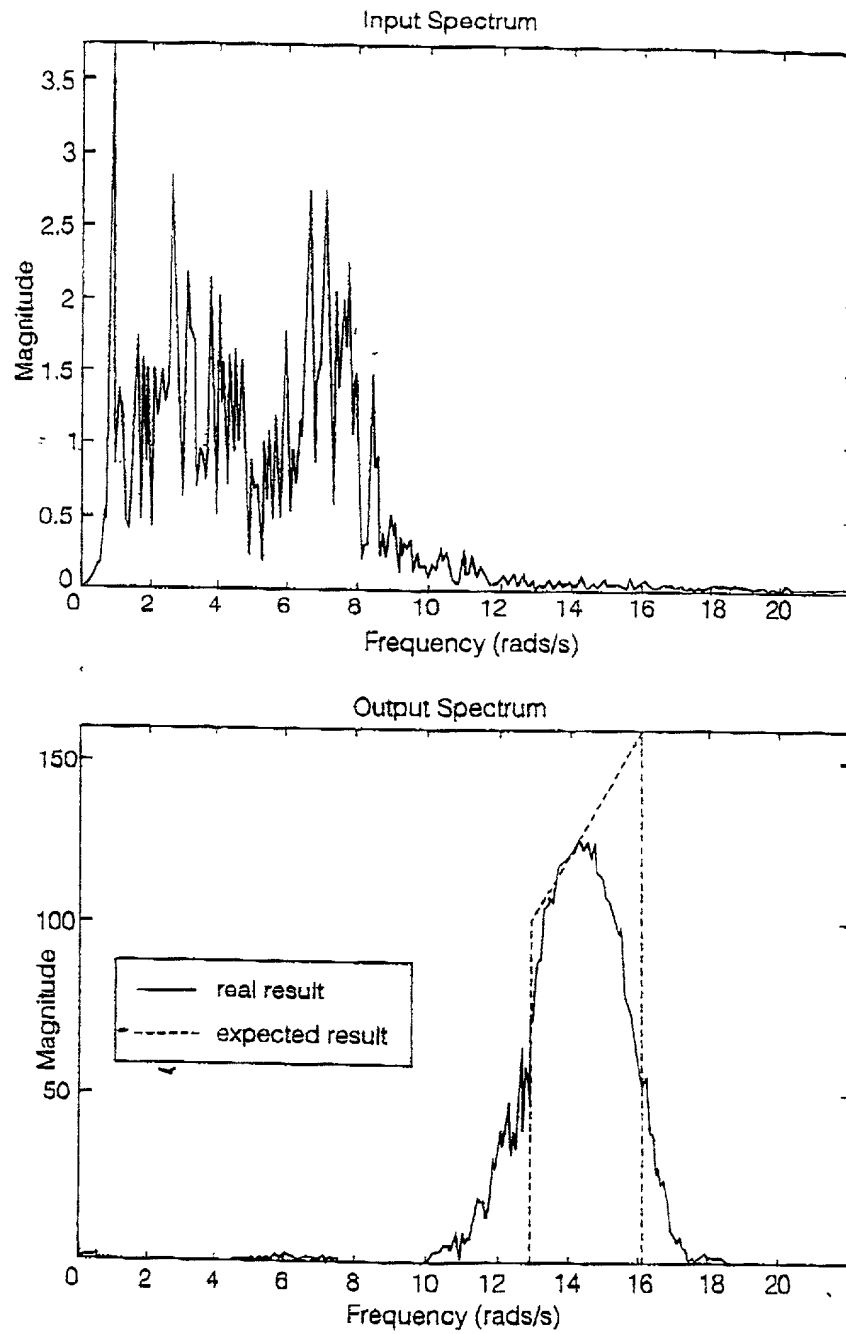

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

28/38

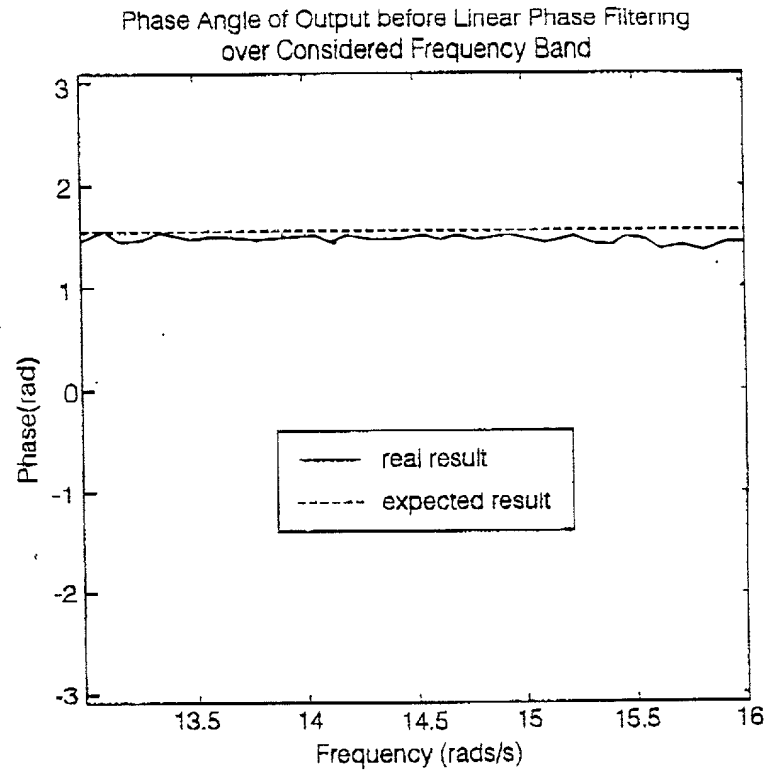


Fig. 34

09/623281

WO 99/45644

PCT/GB99/00550

29/38

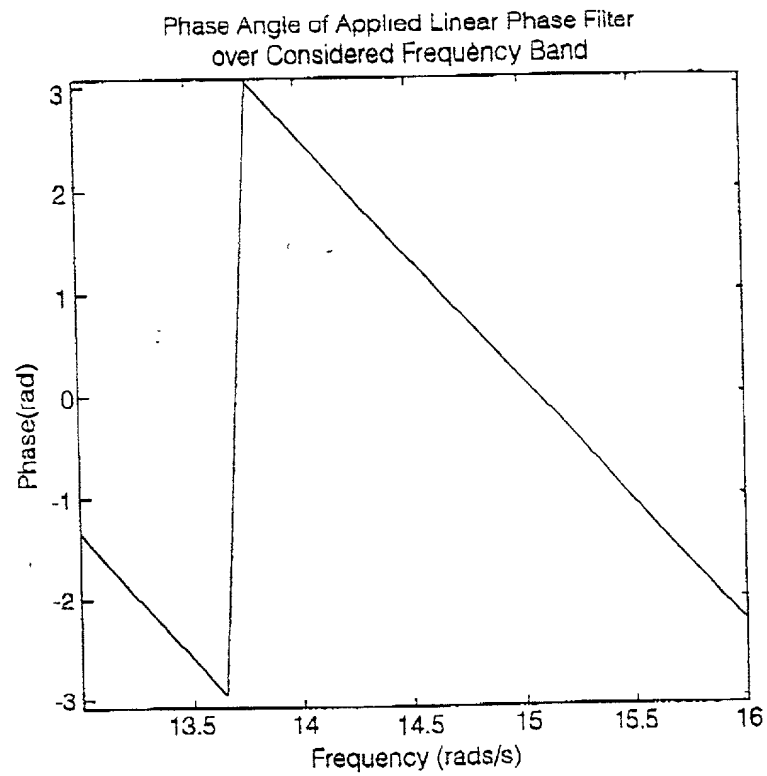


Fig. 35

SUBSTITUTE SHEET (RULE 26)

09/623281

PCT/GB99/00550

WO 99/45644

30/38

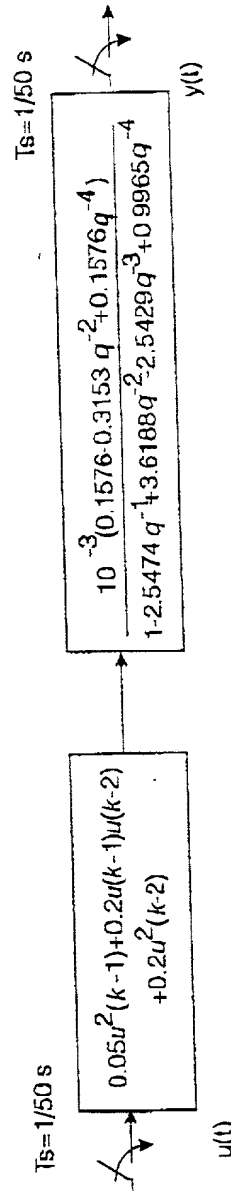


Fig. 36

09/623281

WO 99/45644

PCT/GB99/00550

31/38

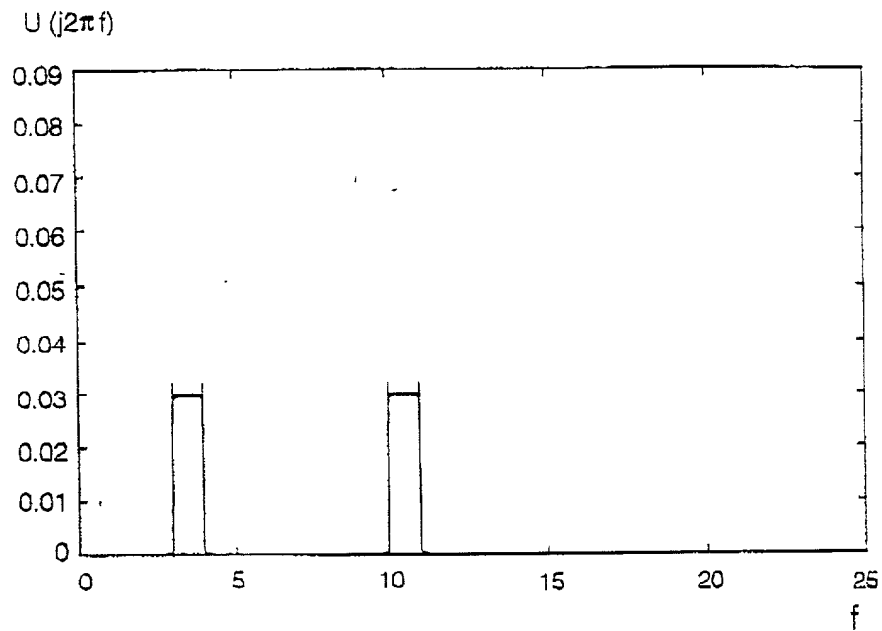


Fig. 37

09/623281

WO 99/45644

PCT/GB99/00550

32/38

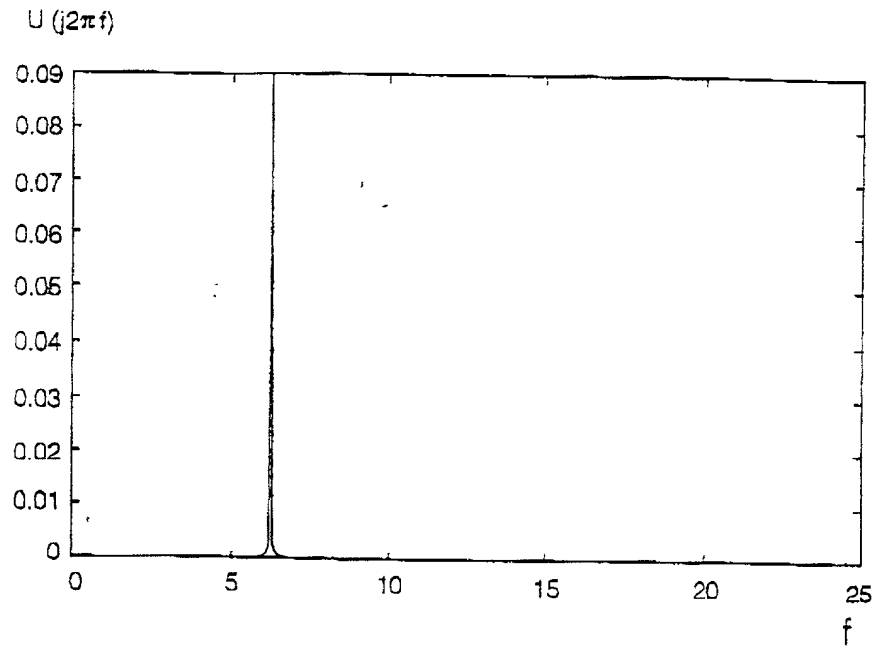


Fig. 38

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

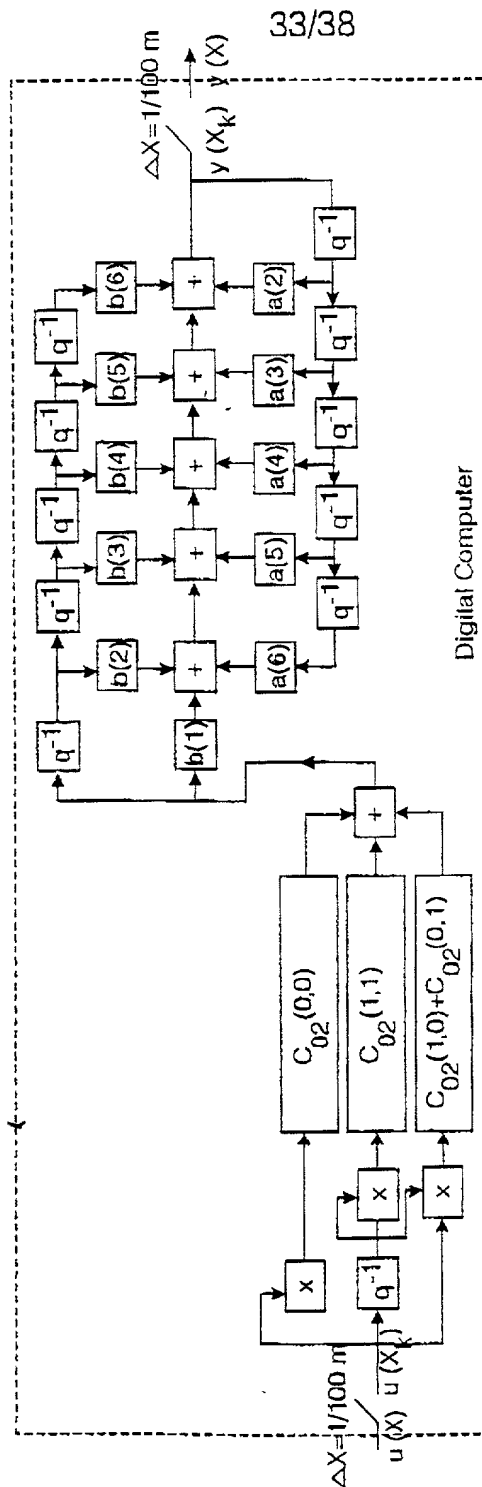


Fig. 39

09/623281

PCT/GB99/00550

WO 99/45644

34/38

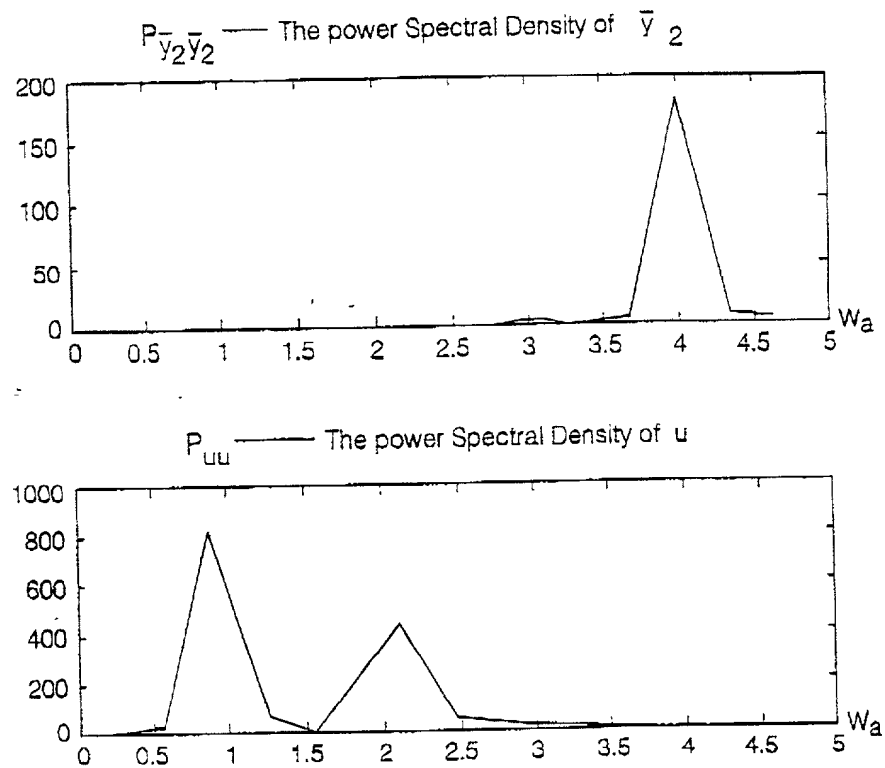


Fig. 40

09/623281

WO 99/45644

PCT/GB99/00550

35/38

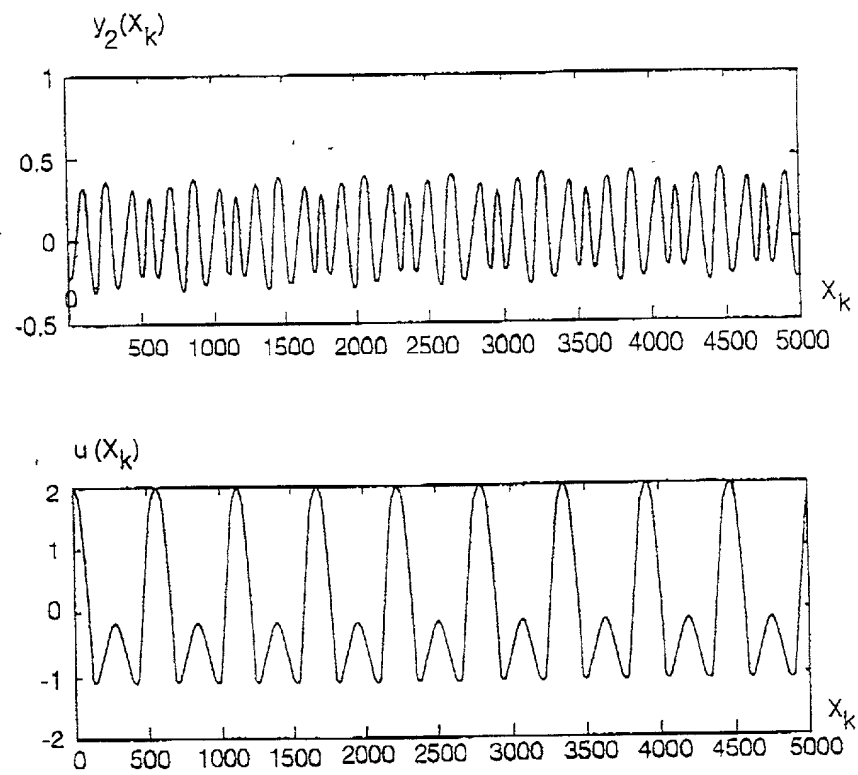


Fig. 41

09/623281

WO 99/45644

PCT/GB99/00550

36/38

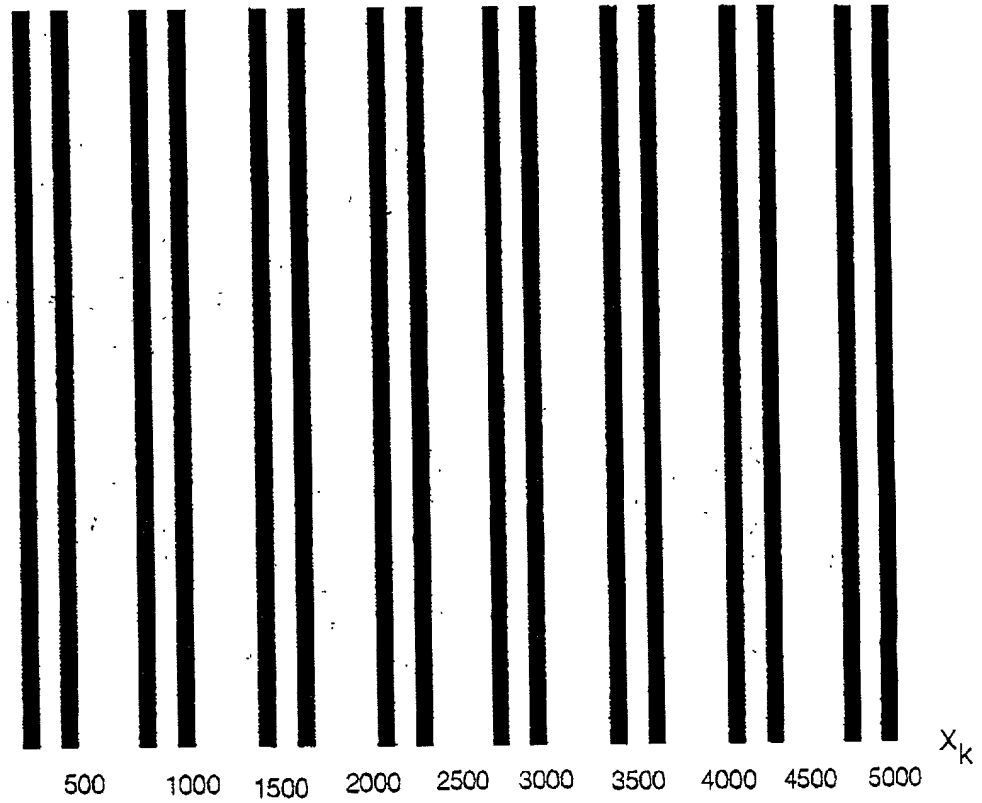


Fig. 42

SUBSTITUTE SHEET (RULE 26)

09/623281

WO 99/45644

PCT/GB99/00550

37/38

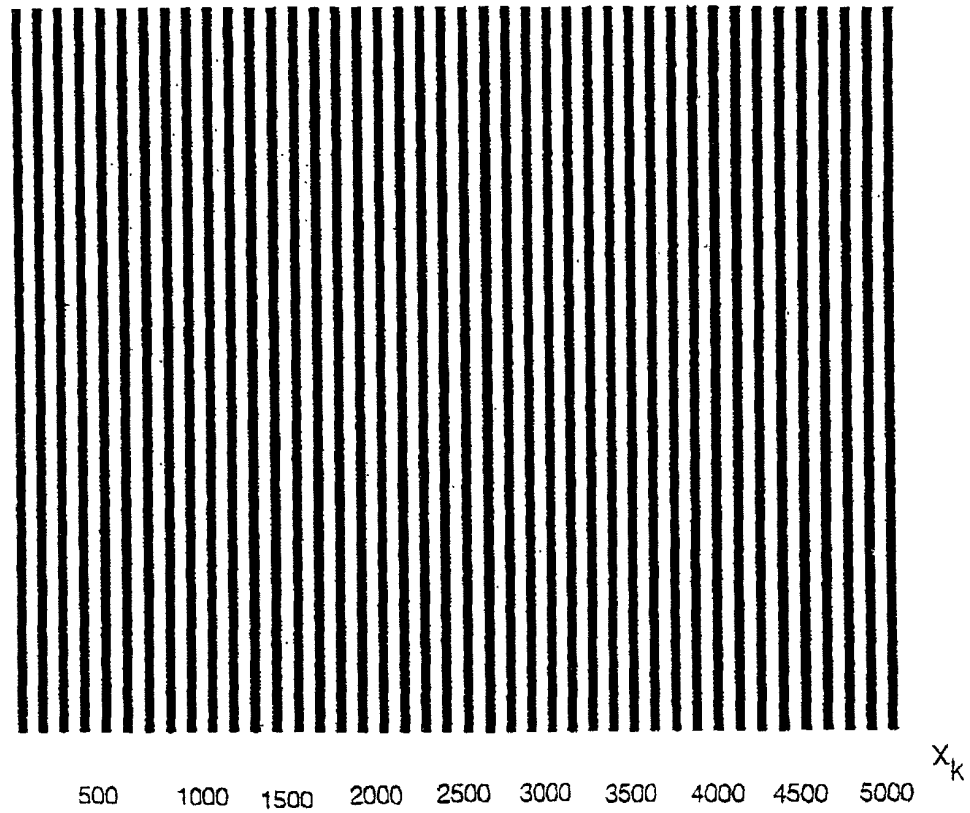


Fig. 43

SUBSTITUTE SHEET (RULE 26)

09/623281

PCT/GB99/00550

WO 99/45644

38/38

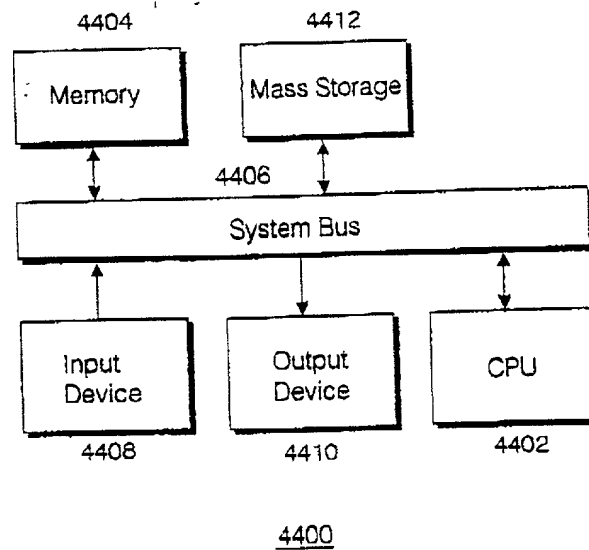


Fig. 44

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled NONLINEAR SYSTEMS, METHOD OF DESIGN THEREOF AND COMPUTER PROGRAM PRODUCT, the specification of which:

☐ is attached hereto.

☒ was filed on September 1, 2000 as Application Serial No. 09/623,281 and was amended on _____.

☒ was described and claimed in PCT International Application No. PCT/GB99/00550 filed on 2 March 1999.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed	
WIPO	PCT/GB99/00550	2 March 1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Great Britain	9804412.6	3 March 1998	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Eric L. Prah, Reg. No. 32,590
John F. Hayden, Reg. No. 37,640

Frank R. Occhiuti, Reg. No. 35,306
Y. Rocky Tsao, Reg. No. 34,053

Address all telephone calls to ERIC L. PRAHL at telephone number (617) 542-5070.

Address all correspondence to ERIC L. PRAHL at:


FISH & RICHARDSON P.C.
225 Franklin Street
Boston, MA 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Combined Declaration and Power of Attorney

Page 2 of 2 Pages

170 Full Name of Inventor: STEPHEN ALEC BELLINGS

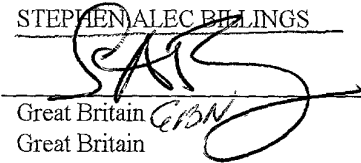Inventor's Signature: 

Date: 31/10/00

Residence Address: Great Britain

Great Britain

Citizenship: Great Britain

Great Britain


Post Office Address: 16 Grove Road

16 Grove Road

Totley, Sheffield S17 4DJ

Great Britain

200 Full Name of Inventor: ZI QIANG LANG

Inventor's Signature: 

Date: 31/10/00

Residence Address: Great Britain

Great Britain

Citizenship: China

China

Post Office Address: 105 Hawley Street

105 Hawley Street

Sheffield S1 2EA

Great Britain

20134417.doc